




BN-BE-BX-BY Series

IE1-IE2-IE3-IE4  $\text{\textcircled{3}}$

THREE-PHASE ASYNCHRONOUS MOTORS






Chapter	Description	Page	Chapter	Description	Page
M1	Symbols and units of measurement	2	M8.2	Most significant features	30
M2	Introduction	3	M8.3	Degree of protection	32
M3	General characteristics	5	M8.4	FD brake power supply	32
	M3.1 Production range	5	M8.5	FD brake technical specifications	35
	M3.2 Standards	5	M8.6	FD brake connections	35
	M3.3 Directives 2006/95/EC (LVD) and 2004/108/EC (EMC)	6	M9	Brake release systems	37
	M3.4 EU Directive 2012/19/EU Information on disposal	6		M9.1 Release lever orientation	38
	M3.5 Tolerances	6		M9.2 Separate brake supply	38
M4	Motor designation	7	M10	Options	38
M5	Variants and options	11		M10.1 Soft-start / stop	38
	M5.1 Variants	11		M10.2 Capacitive filter	38
	M5.2 Options	11		M10.3 Thermal protective devices	38
	M5.3 Brake-related options	12		M10.4 Thermistors	38
	M5.4 Example of identification nameplate for legacy motors (BX - BE - BN)	12		M10.5 Bimetallic thermostates	39
M6	Mechanical features	13		M10.6 Temperature sensors	39
	M6.1 Versions	13		M10.7 Plug connector	39
	M6.2 Degree of protection	14		M10.8 Control of brake operation	42
	M6.3 Cooling	15		M10.9 Additional cable entry for brakemotors	42
	M6.4 Direction of rotation	15		M10.10 Anti-condensation heaters	43
	M6.5 Noise	15		M10.11 Tropicalization	43
	M6.6 Vibrations and balancing	15		M10.12 Second shaft extension	43
	M6.7 Terminal box	16		M10.13 Backstop device	44
	M6.8 Cable entry	16		M11.14 Rotor balancing	44
	M6.9 Bearings	17		M10.15 Ventilation	45
M7	Electrical characteristics	18		M10.16 Rain canopy	47
	M7.1 Voltage	18		M10.17 Textile canopy	47
	M7.2 Frequency	20		M10.18 Feedback units	48
	M7.3 Ambient temperature	21		M10.19 Insulated Bearings	49
	M7.4 50 HZ normalized power	21		M10.20 Vertical Mounting	50
	M7.5 Motors for USA and Canada	22		M10.21 Surface protection	50
	M7.6 Motors certified for India	23		M10.22 Painting	51
	M7.7 China Compulsory Certification	23		M10.23 Certificates	51
	M7.8 Motor certified for China (China Energy Label)	24	M11	Tables of motors correlation	52
	M7.9 Motors certified for Brazil	25		M11.1 50 Hz Motors	52
	M7.10 Motors certified for Australia	25		M11.2 60 Hz Motors	53
	M7.11 Insulation class	25	M12	Motor rating charts BY	55
	M7.12 Type of duty	26	M13	Motors dimensions BY	56
	M7.13 Inverter-controlled motors	28	M14	Motor rating charts BX-MX	58
	M7.14 Permissible starts per hour, Z	29	M15	Motors dimensions BX-MX	64
M8	Brake motors - direct current brake for BX-BE-BX   MX-ME-M	30	M16	Motor rating charts BE-ME	80
	M8.1 Operation	30	M17	Motors dimensions BE-ME	88
			M18	Motor rating charts BN-M	96
			M19	Motors dimensions BN-M	106

## Revisions


Refer to page 114 for the catalogue revision index. Visit [www.bonfiglioli.com](http://www.bonfiglioli.com) to search for catalogues with up-to-date revisions.



## ELECTRIC MOTORS

### M1 SYMBOLS AND UNITS OF MEASUREMENT

Symbols	Units of Measure	Description	Symbols	Units of Measure	Description
$\cos\varphi$	–	Power factor	$n$	$[\text{min}^{-1}]$	Rated speed
$\eta$	–	Efficiency	$P_B$	[W]	Power drawn by the brake at 20°C
$f_m$	–	Power adjusting factor	$P_n$	[kW]	Motor rated power
$l$	–	Cyclic duration factor	$P_r$	[kW]	Required power
$I_N$	[A]	Rated current	$t_1$	[ms]	Brake response time with one-way rectifier
$I_s$	[A]	Locked rotor current	$t_{1s}$	[ms]	Brake response time with electronic-controlled rectifier
$J_c$	[Kgm <sup>2</sup> ]	Load moment of inertia	$t_2$	[ms]	Brake reaction time with a.c. disconnect
$J_M$	[Kgm <sup>2</sup> ]	Moment of inertia	$t_{2c}$	[ms]	Brake reaction time with a.c. and d.c. disconnect
$K_c$	–	Torque factor	$t_a$	[°C]	Ambient temperature
$K_d$	–	Load factor	$t_f$	[min]	Work time at constant load
$K_J$	–	Inertia factor	$t_r$	[min]	Rest time
$M_A$	[Nm]	Mean breakaway torque	$W$	[J]	Braking work between service interval
$M_B$	[Nm]	Brake torque	$W_{max}$	[J]	Maximum brake work for each braking
$M_N$	[Nm]	Rated torque	$Z$	[1/h]	Permissible starting frequency, loaded
$M_L$	[Nm]	Counter-torque during acceleration	$Z_0$	[1/h]	Max. permissible unloaded starting frequency ( $l = 50\%$ )
$M_s$	[Nm]	Starting torque			



## M2 INTRODUCTION

To harmonize efficiency classifications for motors manufactured and sold in the global market, the International Electrotechnical Commission (IEC) introduced Standard IEC 60034-30:2008, which was updated in 2014 and is now referred to as IEC 60034-30-1:2014, “Rotating electrical machines – Part 30-1: Efficiency classes of line operated AC motors.” In addition to defining efficiency classes for electric motors, the IEC has also developed a standard that specifies how to determine motor efficiencies and losses based on established testing methods. This standard, IEC 60034-2-1 : 2024, ensures an international common base for electric motor designing and classification, as well as for national legislative activities and provides the basis for defining the efficiency classes in IEC 60034-30-1.

Both standards were developed in conjunction with the National Electrical Manufacturers Association (NEMA), the Japan Electrical Manufacturers Association (JEMA), and the European Committee of Manufacturers of Electrical Machines and Power Electronics (CEMEP).

In 2017, the IEC published a new standard dealing with the energy efficiency of AC drives and drive-motor systems:


IEC 61800-9 “Ecodesign for power drive systems, motor starters, power electronics and their driven applications”. The standard IEC 61800-9 is harmonized in Europe as EN 61800-9 and replaces the earlier standard EN 50598 (-1 and -2).

The European Regulation 2019/1781, fully implemented since July 2023, defines for the first time legally binding energy efficiency standards for frequency inverters.

The following table shows the correspondence among the main classes.

### Global efficiency classes

<b>IEC</b> 60034-30-1	IE1	IE2	IE3	IE4	IE5
<b>NEMA</b> MG-1	STANDARD	HIGH	PREMIUM	SUPER PREMIUM	
<b>GB</b> 18613		GRADE 4	GRADE 3	GRADE 2	GRADE 1
<b>NBR</b> 17094-1		IR2	IR3		
<b>AS/NZS</b> 1359,5	IE1	IE2	IE3		
<b>IS</b> 12615	IE1	IE2	IE3	IE4	
<b>SASO</b> 2893	IE1	IE2	IE3	IE4	
<b>KS C</b> IEC 60034	IE1	IE2	IE3	IE4	
<b>JIS C</b> 4034-30	IE1	IE2	IE3	IE4	



### History of energy efficiency standards

**IEC 60034-2-1: 2007:** harmonizes the procedures for the measurement of efficiencies.

**IEC 60034-30: 2008:** specifies efficiency classes and forms the basis for the various national efficiency requirements.

**IEC 60034-2-1: 2014:** is intended to establish methods of determining efficiencies from tests, and to specify methods of obtaining specific losses.

**IEC 60034-30-1: 2014:** takes a step further in widening the scope of motors subject to efficiency classes and introduces the IE4 class. VSD-driven motors are out of the scope of this standard and will be dealt with in a standard of its own.

**IEC TS 60034-30-2: 2016:** Rotating electrical machines - Part 30-2: Efficiency classes of variable speed AC motors (IE-code)

**IEC 60034-2-3 : 2020:** Rotating electrical machines - Part 2-3: Specific test methods for determining losses and efficiency of converter-fed AC motors.

**IEC 60034-2-1: 2024:** Updates the standard methods for determining losses and efficiency from tests, introducing refined procedures to ensure higher measurement accuracy.

The IE classes are shown in the following table:

Class type	Class number
Standard efficiency	IE1
High efficiency	IE2
Premium efficiency	IE3
Super premium efficiency	IE4


**IEC 61800-9:2017** introduced the extended product approach, which allows us to determine the efficiency of drive + motor + driven equipment (i.e. a pump) under defined load-time profile.

The regulation defines efficiency classes for AC drives and motor-drive systems (Power Drive Systems in the standard).

For AC drives, the standard defines three classes: IE0, IE1 and IE2.

For motor-drive systems, there are again three classes: IES0, IES1 and IES2. The 'S' after 'IE' stands for 'system'.

**European Regulation 2019/1781:** New regulations for the European market for induction motors and electronic motors controls such as frequency inverters.



## M3 GENERAL CHARACTERISTICS

### M3.1 Production range

The asynchronous three-phase electric motors of BONFIGLIOLI, are available in basic design IMB5 and derived versions.

Motors are the enclosed type with outer fan and cage-type rotor for use in industrial environments.

Standard versions of BX-BE/MX-ME motors are 230/400V  $\Delta/Y$  (400/690V  $\Delta/Y$  in sizes BX-BE 160 and BX-BE 180), 50 Hz motors, with a tolerance of  $\pm 10\%$ . Standard BN/M motors are designed to operate from a rated voltage 230/400V  $\Delta/Y$  (400/690V  $\Delta/Y$  for frame sizes BN 160 through BN 200) 50 Hz, with  $\pm 10\%$  tolerance. On the BXN/MXN motors, it is present a terminal box with 9 PIN connection + 12 wires winding that makes it easy to obtain the right voltage for most countries as standard. The Standard versions is identified as WD1 and makes it possible to obtain the following voltages/frequency (115/200/230/400V-50Hz and 132/230/265/460V-60Hz). For the BXN/MXN motors the voltage tolerance is reduced to  $\pm 5\%$ .

### M3.2 Standards

The motors described in this catalogue are manufactured to the applicable standards shown in the following table.


(F01)

Title	CEI	IEC
General requirements for rotating electrical machines	CEI EN 60034-1	IEC 60034-1
Terminal markings and direction of rotation of rotating machines	CEI 2-8	IEC 60034-8
Methods of cooling for electrical machines	CEI EN 60034-6	IEC 60034-6
Dimensions and output ratings for rotating electrical machines	EN 50347	IEC 60072
Classification of degree of protection provided by enclosures for rotating machines	CEI EN 60034-5	IEC 60034-5
Noise limits	CEI EN 60034-9	IEC 60034-9
Classification of type of construction and mounting arrangements	CEI EN 60034-7	IEC 60034-7
Rated voltage for low voltage mains power	CEI 8-6	IEC 60038
Vibration level of electric machines	CEI EN 60034-14	IEC 60034-14
Efficiency classes of single-speed, three-phase, cage-induction motors (IE code)	CEI EN 60034-30-1	IEC 60034-30-1
Standard method for determining losses and efficiency from tests	CEI EN 60034-2-1	IEC 60034-2-1

The motors also comply with foreign standards adapted to IEC 60034-1 as shown here below.

(F02)

DIN VDE 0530	Germany
BS5000 / BS4999	Great Britain
AS 1359	Australia
NBNC 51 - 101	Belgium
NEK - IEC 34	Norway
NF C 51	France
OEVE M 10	Austria
SEV 3009	Switzerland
NEN 3173	Netherlands
SS 426 01 01	Sweden



**M3.3 Directives 2006/95/EC (LVD) and 2004/108/EC (EMC)**

Bonfiglioli motors meet the requirements of Directives 2014/35/UE (LVD - Low Voltage Directive), the 2014/30/UE (EMC - Electromagnetic Compatibility Directive), the 2009/125/CE (ERP - Energy Related Products Directive) and 2011/65/UE (RoHS – Restriction of Hazardous Substances) and their nameplates bear the CE mark. As for the EMC Directive, construction is in accordance with standards CEI EN 60034-1 (Rotating electrical machines Part 1: Rating and performance), CEI EN 61000-6-2 (Generic standards - Immunity for industrial environments), CEI EN 61000-6-4 (Generic standards - Emission standard for industrial environments). Motors with FD brakes, when fitted with the suitable capacitive filter at rectifier input (option CF), meet the emission limits required by Standards CEI EN 61000-6-3 and CEI EN 60204-1. The responsibility for final product safety and compliance with applicable directives rests with the manufacturer or the assembler who incorporate the motors as component parts.

**UKCA mark as standard**

In UK, the CE mark will be replaced by the UKCA (United Kingdom Conformity Assessed mark) mark, due to Brexit, starting from 1st January 2022. All Bonfiglioli motors are already compliant with UKCA requirements.

**M3.4 EU Directive 2012/19/EU - Information on disposal**




This product should not be mixed with general household waste. Disposal has to be carried out in conformity with EU Directive 2012/19/EU where established, and in accordance to national regulations. Fulfill disposal in accordance with any other legislation in force throughout the country.

**M3.5 Tolerances**

As per the Norms CEI EN 60034-1, applicable the tolerances here below apply to the following quantities. (F03)

-0.15 (1 - η) P ≤ 150kW -0.10 (1 - η) P > 150kW	Efficiency
-(1 - cosφ)/6 min 0.02 max 0.07	Power factor
±20% *	Slip
+20%	Locked rotor current
-15% +25%	Locked rotor torque
-10%	Max. torque


(\*) ± 30% for motors with Pn < 1 kW




**M4 MOTOR DESIGNATION**

MOTOR

**BY 280MAK 4 400/690-50 IP55 CLF B5 .....**

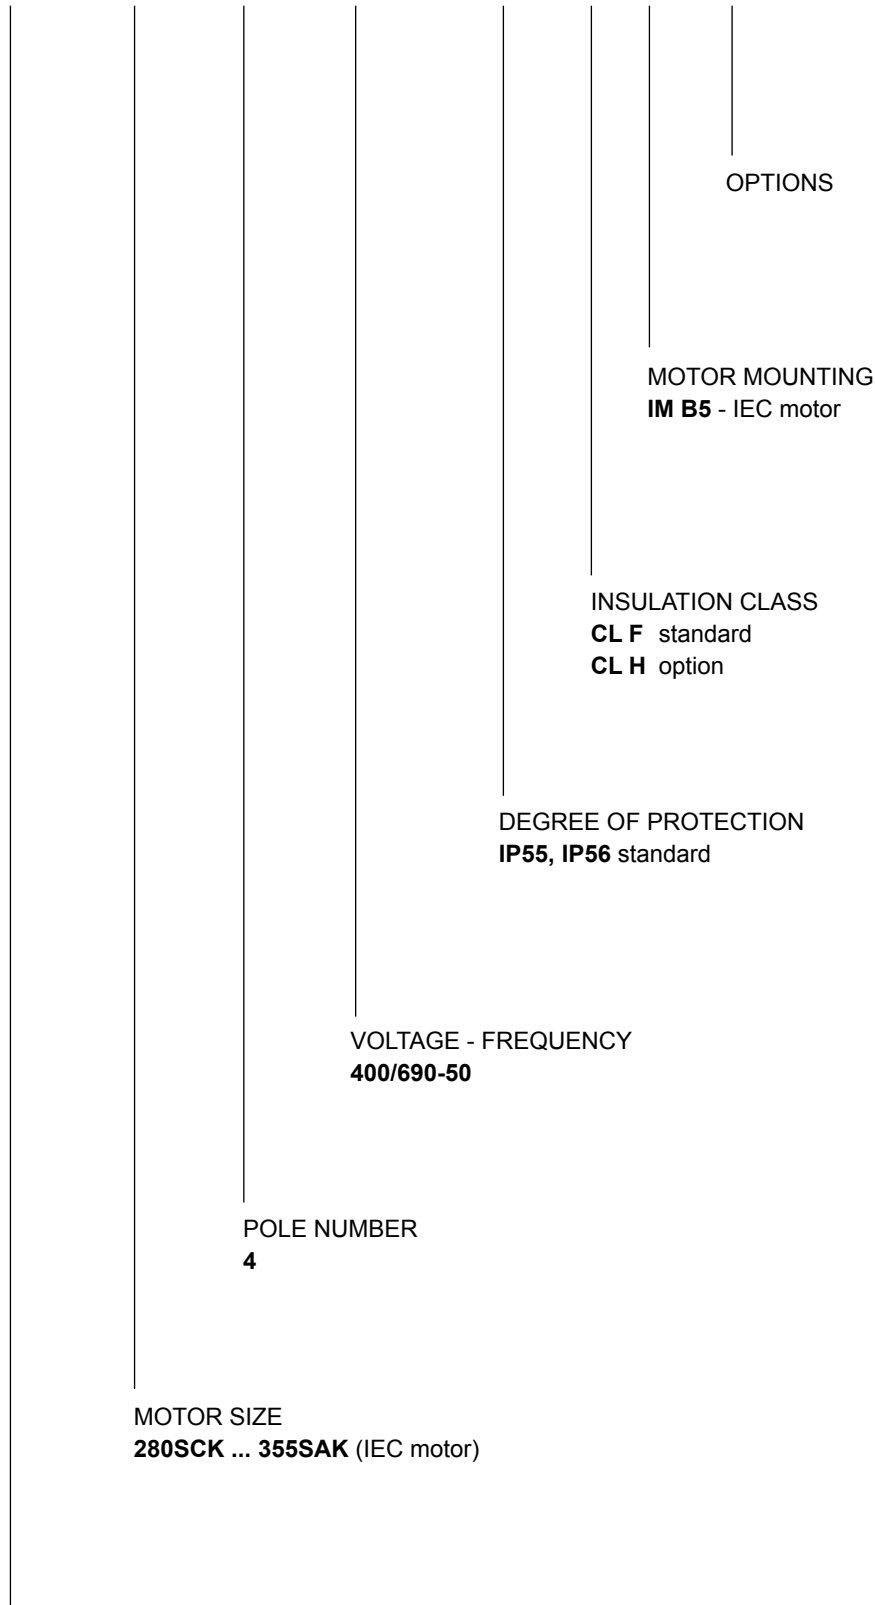

MOTOR TYPE  
**BY** = IEC 3-phase, class IE4



MOTOR

BRAKE

**BX 132SB 4** 230/400-50 IP55 CLF B5 **W FD** 7.5 R AA SB 220 SA .....

OPTIONS

BRAKE SUPPLY

RECTIFIER TYPE

AC/DC

**NB, SB, NBR, SBR**

RELEASE LEVER ORIENTATION

**AA, AB** (standard), **AC, AD**

BRAKE HAND RELEASE

**R, RM**

BRAKE TORQUE

BRAKE TYPE

**FD** (d.c. brake)

TERMINAL BOX POSITION

(compact motor only)

**W** (default), **N, E, S**

MOTOR MOUNTING

- compact motor

**B3, B5, B14, B5R, B14R, B34, B35** - IEC motor

INSULATION CLASS

**CL F** standard

**CL H** option

DEGREE OF PROTECTION

**IP55** standard (IP56 - option)

**IP54, IP55** brake motor

VOLTAGE - FREQUENCY

(See Paragraph M7.1)

POLE NUMBER

**4**

MOTOR SIZE


**63A ... 355** (IEC motor)

**05A ... 5LA** (compact motor)

MOTOR TYPE

**BX** = IEC 3-phase, class IE3

**MX** = compact 3-phase, class IE3



MOTOR

BRAKE

**BE 90LA 4 230/400-50 IP55 CLF B5 W FD 7.5 R AA SB 220 SA .....**

OPTIONS

BRAKE SUPPLY

RECTIFIER TYPE

AC/DC

**NB, SB, NBR, SBR**

RELEASE LEVER ORIENTATION

**AA, AB** (standard), **AC, AD**

BRAKE HAND RELEASE

**R, RM**

BRAKE TORQUE

BRAKE TYPE

**FD** (d.c. brake)

TERMINAL BOX POSITION

(compact motor only)

**W** (default), **N, E, S**

MOTOR MOUNTING

- compact motor

**B3, B5, B14, B5R, B14R, B34, B35** - IEC motor

INSULATION CLASS

**CL F** standard

**CL H** option

DEGREE OF PROTECTION

**IP55** standard (IP56 - option)

**IP54, IP55** brake motor

VOLTAGE - FREQUENCY

(See Paragraph M7.1)

POLE NUMBER

**2, 4, 6**

MOTOR SIZE


**63A ... 180L** (IEC motor)

**05A ... 5L** (compact motor)

MOTOR TYPE

**BE** = IEC 3-phase, class IE2

**ME** = compact 3-phase, class IE2



MOTOR

BRAKE

**BN 90LA 4 230/400-50 IP55 CLF B5 W FD 7.5 R AA SB 220 SA .....**

OPTIONS

BRAKE SUPPLY

RECTIFIER TYPE

AC/DC

**NB, SB, NBR, SBR**

RELEASE LEVER ORIENTATION

**AA, AB** (standard), **AC, AD**

BRAKE HAND RELEASE

**R, RM**

BRAKE TORQUE

BRAKE TYPE

**FD** (d.c. brake)

TERMINAL BOX POSITION

(compact motor only)

**W** (default), **N, E, S**

MOTOR MOUNTING

- compact motor

**B3, B5, B14, B5R, B14R, B34, B35** - IEC motor

INSULATION CLASS

**CL F** standard

**CL H** option

DEGREE OF PROTECTION

**IP55** standard (IP56 - option)

**IP54, IP55** brake motor

VOLTAGE - FREQUENCY

(See Paragraph M7.1)

POLE NUMBER

**2, 4, 6**

MOTOR SIZE


**56A ... 200LA** (IEC motor)

**0B ... 5SB** (compact motor)

MOTOR TYPE

**BN** = IEC 3-phase

**M** = IEC compact 3-phase



## M5 VARIANTS AND OPTIONS

### M5.1 Variants

(F04)

Category	Description	Default	Option
Voltage	(BN - BE - BX) ≤ 132	230/400/50	...
	(BN - BE - BX) ≥ 160 / (BY) ≥ 280	400/690/50	
Insulation class	All motor series	CLF	CLH
Design version	BX - BE - BN	B14, B5R, B14R, B3, B34, B35	B5R

Default values.

\* See EVOX specific catalogue

### M5.2 Options

(F05)


Description	Catalogue numbers								Availability
	D3	K1	E3		PT100*				
Thermal protective devices	D3	K1	E3		PT100*				BY-BX-BE-BN-MX-ME-M
50 Hz normalized power	PN								BN - M
Feedback devices	EN1	EN2	EN3	EN4	EN5	EN6	EN7*	EN8*	BY-BX-BE-BN-MX-ME - M
Anti-condensate heaters	H1	NH1							BY-BX-BE-BN-MX-ME - M
Tropicalized windings	TP								BY-BX-BE-BN-MX-ME - M
Double-extended shaft	PS								BY-BX-BE-BN-MX-ME - M
Rotor balancing grade B	RV								BY - BX - BE - BN - MX - ME - M
External mechanical protections	RC	TC****							BY-BX-BE-BN-MX-ME - M
Forced ventilation	U1	U2**							BY - BX - BE - BN - MX - ME - M
Insulated Bearings	IB*								BY - BX
Certification UL	CUS°								BX - BE - BN - MX - ME - M
Bureau of Indian Standard Certification	BIS								BX - BE - MX - ME
China Compulsory Certification	CCC								BN - M
China Energy Label	CEL								BX - MX
Global motor	CN								BXN - MXN
NBR Certification	NBR								BX - MX
EECA Ceertification	EECA								BX
Plug connector	CON****								BX - BE - BN MX - ME - M
Surface protection	C_								BY-BX-BE-BN-MX-ME - M
Painting	RAL								BY-BX-BE-BN-MX-ME - M
Certificates	ACM****								BX - BE - BN - MX - ME - M
Inspection certificate	CC								BY-BX-BE-BN-MX-ME - M
Vertical Mounting	VM*								BY - BX
Backstop device	AL	AR							MX - ME - M
Type of duty	S2	S3							BN - M

\* BX ≥ 200 and BY ≥ 280

\*\*\* Not for motors BX - MX

\*\* Only for motors BN

\*\*\*\* Only for BN-BE and BX ≤ 180



### M5.3 Brake-related options


(F06)

Description	Catalogue numbers				Availability
Brake torque	Refer to the specific brake type				
Manual release lever	R	RM			BX - BE - BN MX - ME - M
Release lever orientation	AB	AA	AC	AD	BX - BE - BN MX - ME - M
DC brake rectifier	NB	NBR	SB	SBR	BX - BE - BN MX - ME - M
Soft-start flywheel	F1				BE - BN ME - M
Capacitive filter	CF				BX - BE - BN MX - ME - M
Brake separate power supply (*)	...SA	...SD			BX - BE - BN MX - ME - M
Brake functionality check	MSW				BX - BE - BN MX - ME - M
Additional cable entry for brake motors	IC				BN M


(\*) Specify voltage. (°) Not for BXN/MXN

 Default values.

### M5.4 Example of identification nameplate for legacy motors (BX - BE - BN)

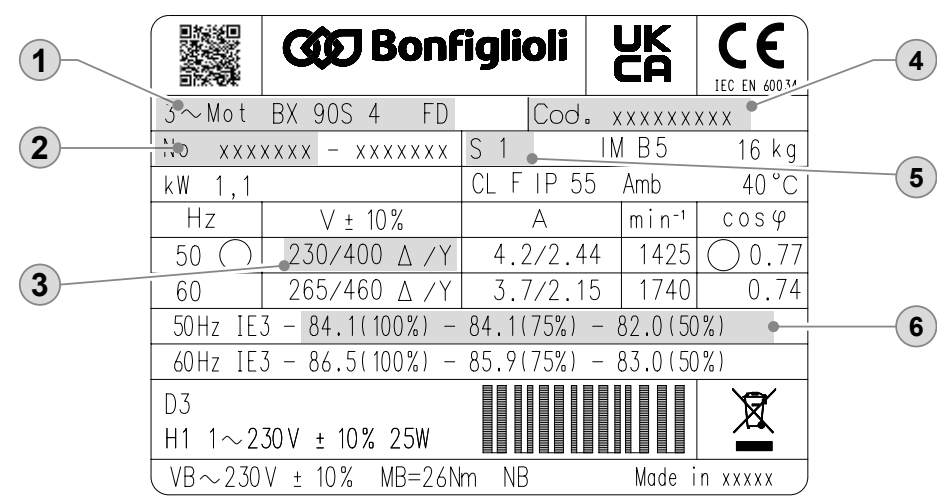

① BONFIGLIOLI Motor type  
 ② Serial number  
 ③ Rated voltage  
 ④ Motor code  
 ⑤ Type of duty: S1 Continuous duty  
 ⑥ IE Class, Efficiency at: 4/4 - 3/4 - 2/4 load




## M6 MECHANICAL FEATURES

### M6.1 Versions

BX, BE and BN motors are available in the design versions as indicated in the table below as per Standards EN 60034-7 (BX/BE), CEI EN 60034-14 (BN).

Motor reporting on nameplate the standard mounting position can be mounted in the position illustrated in the following table:


(F07)

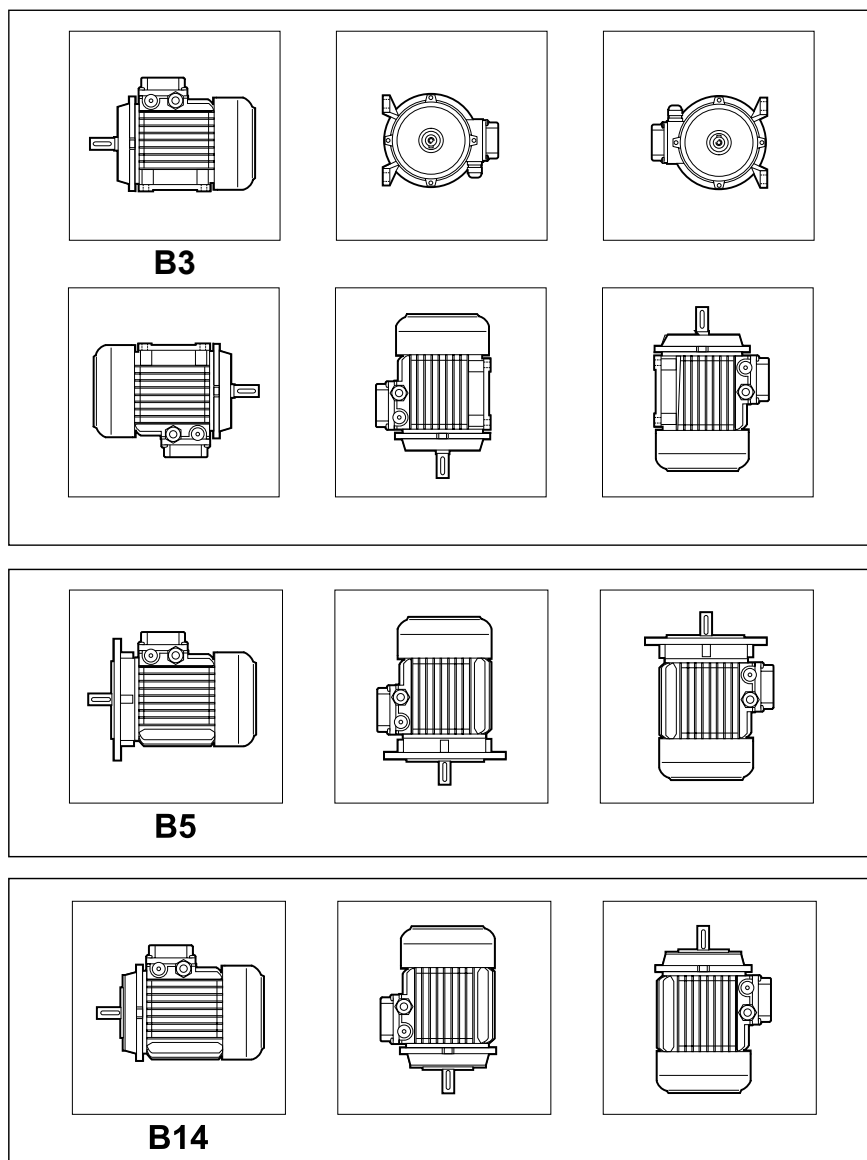

B3 mounting can be combined with B5 or B14 thus becoming B35 in the first case and B34 in the second one.

For **Motor BX $\geq$ 200K and BY $\geq$ 280K** it is necessary to select VM options when vertically mounted.

If the motor will be mounted with DE facing downwards, selection of RC option is recommended. This has to be specified during the ordering phase because not present in standard motor version.



Flange output motors are also available with reduced coupling dimensions, as indicated in the table below - executions **B5R**. Their use in combination with gearboxes must be however coherent with the maximum installable power on gearboxes themselves (see chapters "Motors availability"). In case this condition is not met need to contact the Technical Service for the checking of the combination.

(F08)

	<b>BX/BE/BN 71</b>	<b>BX/BE/BN 80</b>	<b>BX/BE/BN 90</b>	<b>BX/BE/BN 100</b>	<b>BX/BE/BN 112</b>	<b>BX/BE/BN 132</b>
	DxE - Ø					
<b>B5R<sup>(1)</sup></b>	11x23 - 140	14x30 - 160	19x40 - 200	24x50 - 200	24x50 - 200	28x60 - 250

(1) flange with through holes

On BX sizes 71 and 80A, the B5R design is not available in combination with the following options: ENx, PS, and U1.

## M6.2 Degree of protection


### IP..















The following chart provides an overview of the degrees of protection available. In addition to the degree of protection specified when ordering, motors to be installed outdoors require protection against direct sunlight and also – when they are to be installed vertically down – a drip cover to prevent the ingress of water and solid particles (option RC).

(F09)

		IP 54	IP 55	IP 56
<b>BY...K - BX...K - BX - BE - BN</b>	<b>MX - ME - M</b>	●	standard	option
<b>BX_FD - BE_FD - BN_FD</b>	<b>MX_FD - ME_FD - M_FD</b>	standard	option	●
200 ≤ BX... K_FD < 280	-	●	standard	●
<b>BX...K_FD ≥ 280</b>	-	●	standard	option

(\*) BX ≤ 180\_FD



<b>IP</b>		<b>5</b>	<b>5</b>
<b>0</b>		Not protected	
<b>1</b>	 $\varnothing 50 \text{ mm}$	Protected against extraneous solid bodies having $\varnothing \geq 50 \text{ mm}$	
<b>2</b>	 $\varnothing 12 \text{ mm}$	Protected against extraneous solid bodies having $\varnothing \geq 12.5 \text{ mm}$	
<b>3</b>	 $\varnothing 2,5 \text{ mm}$	Protected against extraneous solid bodies having $\varnothing \geq 2.5 \text{ mm}$	
<b>4</b>	 $\varnothing 1 \text{ mm}$	Protected against extraneous solid bodies having $\varnothing \geq 1.0 \text{ mm}$	
<b>5</b>		Protected against dust	
<b>6</b>		No dust ingress	
<b>0</b>		Not protected	
<b>1</b>		Protected against vertical water drips	
<b>2</b>	 $15^\circ$	Protected against vertical water drips inclined up to $15^\circ$	
<b>3</b>	 $60^\circ$	Protected against rain	
<b>4</b>		Protected against water splashes	
<b>5</b>		Protected against jets of water	
<b>6</b>		Protected against powerful jets of water	
<b>7</b>	 $0,15 \text{ m}$	Protected against the effects of temporary immersion	
<b>8</b>	 $1 \text{ m}$	Protected against the effects of continuous immersion	

### M6.3 Cooling

The motors are externally ventilated (IC 411 to CEI EN 60034-6) and are equipped with a plastic fan working in both directions.

The motors must be installed allowing sufficient space between fan cowl and the nearest wall to ensure free air intake and allow access for maintenance purposes on motor and brake, if supplied.

Independent, forced air ventilation (IC 416) can be supplied on request (option U1).

This solution enables to increase the motor duty factor when driven by an inverter and operating at reduced speed.

### M6.4 Direction of rotation


Rotation is possible in both directions. If terminals U1, V1 and W1 are connected to line phases L1, L2 and L3, clockwise rotation (looking from drive end) is obtained. For counterclockwise rotation, switch two phases.

### M6.5 Noise

Noise levels, measured using the method prescribed by ISO 1680 Standards, are within the maximum levels specified by Standards CEI EN 60034-9.

### M6.6 Vibrations and balancing

Rotor shafts are balanced with half key fitted and fall within the vibration class N, as per Standard CEI EN 60034-14.





### M6.7 Terminal box

Legacy motors (BN/M - BE/ME - BX/MX) terminal board features 6 studs for eyelet terminal connection while EVOX BXN and MXN motors have always 9 studs as standard.

When a legacy motor have UL option active the terminal board features 9 studs execution (for US voltage “Dual Voltage”). A ground terminal is also supplied for earthing of the equipment. Terminals number and type are shown in the following table. For brake power supply, please read par. M9 (brake FD). Brakemotors house the a.c./d.c. rectifier (factory pre-wired) inside the terminal box. Wiring instructions are provided either in the box or in the user manual.



(F10)


		No. of terminals	Terminal threads
<b>BX 63 ... BX 90</b> <b>BE 63 ... BE 90</b> <b>BN 56 ... BN 90</b>	<b>MX05 ... MX2</b> <b>ME05 ... ME2</b> <b>M05 ... M2</b>	6	M4
<b>BX 100 ... BX 132</b> <b>BE 100 ... BE 132</b> <b>BN 100 ... BN 160MR</b>	<b>MX3, MX4</b> <b>ME3, ME4</b> <b>M3 ... M4</b>	6	M5
<b>BX 160 - BE 160 ... BE 180M</b> <b>BN 160M ... BN 180M</b>	<b>ME5</b> <b>MX5 - M5</b>	6	M6
<b>BX 180 - BE 180L</b> <b>BN 180L ... BN 200L</b>	- -	6	M8
<b>BX 200K ... BX 250K</b>	-	6	M10
<b>BY 280K ... BY 355K</b> <b>BX 280K ... BX 355K</b>	- -	6	M12
<b>BX 80 ... BX 132</b> <b>BE 63 ... BE 132</b> <b>BN 63 ... BN 160MR</b>	<b>MX2 ... MX4</b> <b>ME05 ... ME4</b> <b>M05 ... M4</b>	9	M4
<b>BX 160 ... BX 180</b> <b>BE 160 ... BE 180</b> <b>BN 160M ... BN 200L</b>	<b>MX5</b> <b>ME5</b> <b>M5</b>	9	M6

### M6.8 Cable entry

The holes used to bring cables to terminal boxes use metric threads in accordance with standard EN 50262 as indicated in the table here after.

(F11)

		Cable gland and dimensions	Position	Maximum cable diameter allowed [mm]
<b>BX 63 - BE 63 - BN 63</b>	<b>MX05 - ME05 - M05</b>	2 x M20 x 1.5	1 Hole on each side	13
<b>BN71 ... BN90, BE71 ... BE90, BX71 ... BX90</b>	<b>M1 - M2, ME1 - ME2, MX1 - MX2</b>	2 x M25 x 1.5		17
<b>BN100 - BN112, BE100 - BE112, BX100 - BX112</b>	<b>MX3, MX4 - ME3 M3</b>	2 x M32 x 1.5	2 Holes on each side	21
		2 x M25 x 1.5		17
<b>BN132 ... BN160MR, BE132, BX132</b>	<b>M4, ME4, MX4</b>	4 x M32 x 1.5		21
<b>BXN 132</b>	<b>MXN 40</b>	2 x M32 x 1.5	1+1 Hole on each side	21
		2 x M16 x 1.5		10
		1 x M16 x 1.5	1 Hole in the back	10
<b>BN160M ... BN200L, BE160 - BE180, BX160 - BX180</b>	<b>M5, ME5, MX5</b>	2 x M40 x 1.5	Pivoting, 4 x 90°	28
		2 x M20 x 1.5		13
<b>BY 280K ... BY 355K</b> <b>BX 200K ... BX 355K</b>	-	2 x M63 x 1.5	Pivoting, 4 x 90°	45



## M6.9 Bearings

Life lubricated preloaded radial ball bearings are used, types are shown in the chart here under.  
Calculated endurance lifetime L10h, as per ISO 281, in unloaded condition, exceeds 40000 hrs.

**DE** = drive end

**NDE** = non drive end

(F12)

IEC (IE1-IE2)	DE	NDE	
		Without Brake	With Brake
<b>BN 56</b>	6201 2Z C3	6201 2Z C3	–
<b>BE 63 BN 63</b>	6201 2Z C3	6201 2Z C3	6201 2RS C3
<b>BE 71 BN 71</b>	6202 2Z C3	6202 2Z C3	6202 2RS C3
<b>BE 80 - BN 80</b>	6204 2Z C3	6204 2Z C3	6204 2RS C3
<b>BE 90 - BN 90</b>	6205 2Z C3	6205 2Z C3	6305 2RS C3
<b>BE 100 - BN 100</b>	6206 2Z C3	6206 2Z C3	6206 2RS C3
<b>BE 112 - BN 112</b>	6306 2Z C3	6306 2Z C3	6306 2RS C3
<b>BE 132 - BN 132</b>	6308 2Z C3	6308 2Z C3	6308 2RS C3
<b>BN 160MR</b>	6309 2Z C3	6308 2Z C3	6308 2RS C3
<b>BE 160M/L - BN 160M/L</b>	6309 2Z C3	6309 2Z C3	6309 2RS C3
<b>BN 180M</b>	6310 2Z C3	6309 2Z C3	6309 2RS C3
<b>BE 180M/L - BN 180L</b>	6310 2Z C3	6310 2Z C3	6310 2RS C3
<b>BN 200L</b>	6312 2Z C3	6310 2Z C3	6310 2RS C3

IEC (IE3)	DE	NDE	
		Without Brake	With Brake
<b>BX 63</b>	6201 2Z C3	6201 2Z C3	6201 2Z C3
<b>BX 71</b>	6202 2Z C3	6202 2Z C3	6202 2Z C3
<b>BX 80</b>	6204 2Z C3	6204 2Z C3	6204 2Z C3
<b>BX 90</b>	6205 2Z C3	6205 2Z C3	6205 2Z C3
<b>BX 100</b>	6206 2Z C3	6206 2Z C3	6206 2Z C3
<b>BX 112</b>	6306 2Z C3	6306 2Z C3	6306 2Z C3
<b>BX 132</b>	6308 2Z C3	6308 2Z C3	6308 2Z C3
<b>BX 160M/L</b>	6309 2Z C3	6309 2Z C3	6309 2Z C3
<b>BX 180M/L</b>	6310 2Z C3	6310 2Z C3	6310 2Z C3
<b>BX 200K</b>	6312/C3	6210/C3*	6310/C3
<b>BX 225K</b>	6313/C3*	6212/C3*	-
<b>BX 250K</b>	6315/C3*	6213/C3*	-
<b>BY 280K - BX 280K</b>	6316/C3*	6316/C3*	-
<b>BY 315K - BX 315K</b>	6319/C3**	6316/C3**	-
<b>BY 355K - BX 355K</b>	6322/C3**	6316/C3**	-


Compact (IE1-IE2) ACSF - W	DE*	NDE	
		Without Brake	With Brake
<b>ME 05 - M 05</b>	6004 2Z C3	6201 2Z C3	6201 2RS C3
<b>ME 1 - M 1</b>	6004 2Z C3	6202 2Z C3	6202 2RS C3
<b>ME 2 - M 2</b>	6007 2Z C3	6204 2Z C3	6204 2RS C3
<b>ME 3 - M 3</b>	6207 2Z C3	6206 2Z C3	6206 2RS C3
<b>ME 4 - M 4</b>	6309 2Z C3	6308 2Z C3	6308 2RS C3
<b>ME 5 - M 5</b>	6309 2Z C3	6309 2Z C3	6309 2RS C3

Compact (IE3) ACSF - W	DE	NDE	
		Without Brake	With Brake
<b>MX 05</b>	6004 2Z C3	6201 2Z C3	6201 2Z C3
<b>MX 1</b>	6004 2Z C3	6202 2Z C3	6202 2Z C3
<b>MX 2</b>	6007 2Z C3	6204 2Z C3	6204 2Z C3
<b>MX 3</b>	6207 2Z C3	6206 2Z C3	6206 2Z C3
<b>MX 4</b>	6309 2Z C3	6308 2Z C3	6308 2Z C3
<b>MX 5</b>	6309 2Z C3	6309 2Z C3	6309 2Z C3

\*Regreasable bearings with M6x1 Greasing Device

\*\*Regreasable bearings with M10x1 Greasing Device

Note: Compact motors for W gearboxes are not equipped with a DE bearing



## M7 ELECTRICAL CHARACTERISTICS

### M7.1 Voltage

Single speed motors are provided in standard execution either for nominal voltage 230 / 400 V  $\Delta$ /Y, 50 Hz, or 400 / 690 V  $\Delta$ /Y, 50 Hz, with a voltage tolerance of  $\pm 10\%$ .

Note: Motor nominal voltage/frequency also depends on the selection of options related to energy certifications for specific markets. Table below, then, has to be intended only as a guideline, for more details on the available Voltages/Frequencies as a function of the selected certification, please refer to paragraph M7.5 - M7.10.


On all the motors, whose voltage / frequency configuration is not as indicated above, the voltage tolerance is reduced down to  $\pm 5\%$ .

For the operation out of the tolerance boundaries, the temperature may exceed by 10 K the limit provided by the adopted insulation class.

The motors are suitable for operation on distribution European grid with voltage complying with the publication IEC 60038.

(F13)

BN - M motor power supply voltages (IE1)				
Single speed motors at 50Hz				
Motor power supply voltage	— (CE)		CCC	CUS
	STD	FD		
220/380 - 50	✗	✓	✗	✓
230/400 - 50	✓	✓	✓	✓
240/415 - 50	✗	✓	✗	✓
290/500 - 50	✓	✓	✗	✓
380/660 - 50	✗	✓	✗	✓
400/690 - 50	✓	✓	✗	✓
415/720 - 50	✗	✓	✗	✓
500/865 - 50	✓	✓	✗	✓
Double speed motors at 50Hz				
Motor power supply voltage	— (CE)	CCC	CUS	
380 - 50	✓	✗	✓	
400 - 50	✓	✓	✓	
415 - 50	✓	✗	✓	
500 - 50	✓	✗	✓	
Single speed motors at 60Hz				
Motor power supply voltage	— (CE)		CCC	CUS
	STD	FD		
208/360 - 60	✓	✓	✗	✓
220/380 - 60	✓	✓	✗	✓
230/400 - 60	✓	✓	✗	✓
255/440 - 60	✗	✓	✗	✓
265/460 - 60	✗	✓	✓	✓
280/480 - 60	✗	✓	✗	✓
330/575 - 60	✓	✓	✗	✓
380/660 - 60	✓	✓	✗	✓
400/690 - 60	✓	✓	✗	✓
440/760 - 60	✗	✓	✗	✓
460/800 - 60	✗	✓	✗	✓
480/830 - 60	✗	✓	✗	✓
575/995 - 60	✓	✓	✗	✓
220/440 - 60	✓	✓	✗	✓
230/460 - 60	✓	✓	✗	✓
240/480 - 60	✓	✓	✗	✓
Double speed motors at 60Hz				
Motor power supply voltage	— (CE)	CUS		
208 - 60	✓	✓		
220 - 60	✓	✓		
230 - 60	✓	✓		
240 - 60	✓	✓		
380 - 60	✓	✓		
400 - 60	✓	✓		
440 - 60	✓	✓		
460 - 60	✓	✓		
480 - 60	✓	✓		
575 - 60	✓	✓		




(F14)

BE - ME motor power supply voltages (IE2)			
Single speed motors at 50Hz			
Motor power supply voltage	— (CE)	BIS	CUS
220/380 - 50	✓	✓	✓
230/400 - 50	✓	✓	✓
240/415 - 50	✓	✓	✓
290/500 - 50	✓	✓	✓
380/660 - 50	✓	✓	✓
400/690 - 50	✓	✓	✓
415/720 - 50	✓	✓	✓
500/865 - 50	✓	✓	✓
Single speed motors at 60Hz			
Motor power supply voltage	— (CE)		CUS
	STD	FD	
208/360 - 60	✓	✓	✓
220/380 - 60	✓	✓	✓
230/400 - 60	✓	✓	✓
255/440 - 60	✓	✓	✓
265/460 - 60	✗	✓	✓
280/480 - 60	✓	✓	✓
330/575 - 60	✗	✓	✓
380/660 - 60	✓	✓	✓
400/690 - 60	✓	✓	✓
440/760 - 60	✓	✓	✓
460/800 - 60	✗	✓	✓
480/830 - 60	✓	✓	✓
575/995 - 60	✓	✓	✓
220/440 - 60	✓	✓	✓
230/460 - 60	✓	✓	✓
240/480 - 60	✓	✓	✓

BX - MX motor power supply voltages (IE3)						
Single speed motors at 50Hz						
Motor power supply voltage	— (CE)	CCC	CEL	NBR	BIS	CUS
230/400-50	✓ <sup>(1)</sup>	✗	✓ <sup>(6)</sup> (1)	✗	✓ <sup>(1)</sup>	✗
290/500-50	✓	✗	✗	✗	✗	✗
380/660-50	✗	✗	✓ <sup>(4)</sup>	✗	✗	✗
400/690-50	✓ <sup>(2)</sup>	✗	✓ <sup>(2)</sup> (3)	✗	✗	✗
Single speed motors at 60Hz						
Motor power supply voltage	— (CE)		NBR <sup>(*)</sup>	CUS		
	STD	FD				
220/380-60	✗	✗	✓ <sup>(3)</sup>	✗		
265/460-60	✗	✓ <sup>(1)</sup>	✗	✓ <sup>(1)</sup>		
330/575-60	✗	✓ <sup>(3)</sup>	✗	✓ <sup>(3)</sup>		
380/660-60	✗	✗	✓ <sup>(5)</sup>	✗		
440/760-60	✗	✗	✓ <sup>(4)</sup>	✗		
460/800-60	✗	✓ <sup>(2)</sup> (3)	✗	✓ <sup>(2)</sup> (3)		
220/440-60	✗	✗	✓ <sup>(3)</sup>	✗		
230/460-60	✗	✗	✗	✓ <sup>(3)</sup>		



<sup>(1)</sup> only for motor size ≤132      <sup>(3)</sup> only for motor size ≤180      <sup>(5)</sup> only for motor size 180  
<sup>(2)</sup> only for motor size ≥160      <sup>(4)</sup> only for motor size ≥200      <sup>(6)</sup> only for motor size ≥100

Note: 50Hz without brake motors also have 60Hz data on the nameplate



The table below shows the wiring options available.

(F15)

Number of poles			Winding connection
2	BE 80 ... BE 160, BN 63 ... BN 200	ME2 ... ME5, M05 ... M5	Δ / Y <sup>(2)</sup>
4	BX 63 ... BX 180 BX 200LAK ... BX 355MCK BY 280K ... BY 355K BE 63 ... BE 180, BN 56 ... BN 200	MX05 ... MX5 — — ME05 ... ME5, M05 ... M5	
6	BE 90 ... BE 160, BN 63 ... BN 200	ME3 ... ME5, M05 ... M5	



<sup>(2)</sup> Motors with voltage in ratio 2 (ex. 230/460 - 60) will be equipped with a 9 pin terminal box with winding connection either ΔΔ/Δ or YY / Y (except 6 pole BN 63 Δ / Y)



**NOTE: For BXN and MXN motors refer to EVOX specific catalogue**


## M7.2 Frequency

Rated output power BN / M for 60 Hz operation is shown in the following diagram.

(F16)

		2P		4P		6P	
		P <sub>n</sub> [kW]	P <sub>n</sub> [HP]	P <sub>n</sub> [kW]	P <sub>n</sub> [HP]	P <sub>n</sub> [kW]	P <sub>n</sub> [HP]
BN 27A	-	-	-	0.05	0.07	-	-
BN 27B	-	-	-	0.07	0.09	-	-
BN 27C	-	-	-	0.10	0.13	-	-
BN 44B	-	-	-	0.07	0.09	-	-
BN 44C	-	-	-	0.10	0.13	-	-
BN 56A	-	-	-	0.07	0.09	-	-
BN 56B	M 0B	-	-	0.10	0.13	-	-
BN 63A	M 05A	0.21	0.28	0.14	0.19	0.10	0.13
BN 63B	M 05B	0.30	0.40	0.21	0.28	0.14	0.19
BN 63C	M 05C	0.45	0.60	0.30	0.40	-	-
BN 71A	-	0.45	0.60	0.30	0.40	0.21	0.28
-	M 1SC	-	-	-	-	0.21	0.28
BN 71B	M 1SD	0.65	0.87	0.45	0.60	0.30	0.40
BN 71C	M 1LA	0.90	1.20	0.65	0.87	0.45	0.60
BN 80A	-	0.90	1.20	0.65	0.87	0.45	0.60
BN 80B	M 2SA	1.30	1.75	0.90	1.20	0.65	0.87
BN 80C	M 2SB	1.80	2.40	1.30	1.75	0.90	1.20
BN 90S	-	-	-	1.30	1.75	0.90	1.20
BN 90SA	-	1.80	2.40	-	-	-	-
BN 90SB	-	2.20	3.00	-	-	-	-
BN 90L	-	2.50	3.40	-	-	1.30	1.75
BN 90LA	-	-	-	1.80	2.40	-	-
BN 90LB	-	-	-	2.20	3.00	-	-

		2P		4P		6P	
		P <sub>n</sub> [kW]	P <sub>n</sub> [HP]	P <sub>n</sub> [kW]	P <sub>n</sub> [HP]	P <sub>n</sub> [kW]	P <sub>n</sub> [HP]
-	M 3SA	2.50	3.40	1.80	2.40	1.30	1.75
BN 100L	M 3LA	3.50	4.70	2.50	3.40	-	-
BN 100LA		-	-	-	-	1.80	2.40
BN 100LB	M 3LB	4.70	6.30	3.50	4.70	2.20	3.00
BN 100LC	M 3LC	-	-	4.70	6.30	-	-
-		-	-	-	-	2.50	3.40
BN 112M	-	4.70	6.30	4.70	6.30	2.50	3.40
BN 132S	M 4SA	-	-	6.50	8.70	3.50	4.70
BN 132SA		6.50	8.70	-	-	-	-
BN 132SB	M 4SB	8.70	11.70	-	-	-	-
BN 132M	M 4LA	11.00	15.00	-	-	-	-
BN 132MA		-	-	8.70	11.70	4.60	6.20
BN 132MB	M 4LB	-	-	11.00	15.00	6.50	8.70
BN 160MR	M 4LC	12.50	16.80	12.50	16.80	-	-
BN 160M	M 5SA	-	-	12.50	16.80	-	-
BN 160MB		-	17.50	23.40	-	-	8.60
BN 160L	M 5SB	-	-	17.50	23.40	12.60	16.90
BN 180M	M 5SC	21.50	28.80	-	-	-	-
BN 180L	M 5LA	24.50	32.80	21.50	28.80	-	-
BN 200L	-	-	-	25.30	33.90	17.50	23.40
BN 200LA	-	34.00	45.50	-	-	22.00	30.00



BXN / BX / BE / MXN / MX / ME motors are available at 60 Hz on a 4 pole configuration only, and their power rating is the same as their 50 Hz counterpart. Double speed BN / M motors supplied at 60 Hz will have an increase of nominal power, referred to 50 Hz, equal to 15%, whereas double speed BXN / BX / BE / MXN / MX / ME motors are not available. If a nominal power rating, equal to the normalised nominal power rating at 50 Hz, was requested to be on a nameplate of a motor meant to be voltage supplied at 60 Hz, the PN option shall be specified on the motor designation. Motors normally designed for a 50 Hz frequency may be used on a 60 Hz operating grid, but the related data shall be updated according to the following table. Motors designated for 50 Hz operation show on the nameplate also the values for 60 Hz operation (excluding motors in CUS execution and brake motors). See the following table.

(F17)

	50 Hz	60 Hz			
	V - 50 Hz	V - 60 Hz	P <sub>n</sub> - 60 Hz	M <sub>n</sub> , M <sub>a</sub> /M <sub>n</sub> - 60 Hz	n [min <sup>-1</sup> ] - 60 Hz
<b>BX / MX BE / ME</b>	<b>230/400 Δ/Y</b>	265 - 460 Δ Y	1	0.83	1.2
	<b>400/690 Δ/Y</b>	460 Δ			
<b>BN / M</b>	<b>230/400 Δ/Y</b>	220 - 240 Δ			
		380 - 415 Y			
	<b>400/690 Δ/Y</b>	380 - 415 Δ			
<b>BN / M</b>	<b>230/400 Δ/Y</b>	265 - 280 Δ			
		440 - 480 Y			
	<b>400/690 Δ/Y</b>	440 - 480 Δ			

NOTE: For BXN and MXN motors refer to EVOX specific catalogue.

### M7.3 Ambient temperature

Catalogue rating values are calculated for 50 Hz operation and for standard ambient conditions (temperature 40 °C; elevation ≤ 1000 m a.s.l.) as per the CEI EN 60034-1 Standards.

The motors can be used within the 40 - 60 °C temperature range with rated power output adjusted by factors given in the table below.

(F18)

Ambient temperature (°C)	40	45	50	55	60
Permitted power as a % of rated power	1.00	0.97	0.94	0.90	0.86

Should a derating factor higher than 15% apply please consult factory.


### M7.4 50 HZ normalized power

#### PN

This option ensures the motor nameplate includes 50 Hz normalized power information even when the motor is designated for 60 Hz operation. The PN option is applied by default in the following cases:

- Standard 60 Hz Voltages: For 230/460V-60Hz and 330/575V-60Hz supplies, regardless of any certification options.
- With "CUS" Option: When the CUS option is selected in combination with the following voltages:
  - 220/440V-60Hz
  - 230/460V-60Hz
  - 240/480V-60Hz
  - 330/575V-60Hz

Duty Cycle Note: These rules apply regardless of the duty type. For instance, a motor configured as 240/480V-60Hz with "CUS" and S3 duty will maintain the same S3 power rating as its 50Hz equivalent by default.



## M7.5 Motors for USA and Canada

### CUS

CUS option is available in NEMA Design C execution for BN, BE, M, ME motors, and NEMA Design B for BX motors, with regards to the electrical features. The BXN and MXN motors are cURus certified as standard. Motors are certified in compliance with CSA (Canadian Standard) C22.2 N° 100 and UL (Underwriters Laboratory) UL 1004-1 standards, as stated on UL file E308649.

All powers BN-BE-M-ME and BXN-MXN with powers between 0,12 and 0,55kW included motors nameplates show the below marks:



S1 continuous duty BXN/MXN  $\geq 0,75$ kW and BX/MX  $\geq 0,75$ kW motors nameplates show the below marks and are certified in compliance with the energy efficiency standards in effect in the USA and Canada, respectively provided by DOE (10 CFR Part 431) and NRCAN (Energy Efficiency Regulations), tested according to CSA C390 standard.



BX 100 motors are available for the USA only and not for Canada, and the related marks reported on the nameplates are the following:



BX $\geq$ 200K motors shows on nameplate the logo reported below and are compliant to energy efficiency regulations of USA and Canada, respectively established from DOE (10 CFR Part 431) and from NRCAN (Energy Efficiency Regulations), and tested in accordance to CSA C390.




#### NOTES:

Starting from **June, 1st 2016**, CUS motors whose efficiency is below IE3 (i.e. "Premium Efficiency") cannot be any longer sold in the USA and Canada, unless one or more of the following conditions apply:

- Double speed motors;
- Motors plated for a non - continuous duty (<80%);
- Motors intended to be operated through variable frequency drive only (properly equipped with "Inverter Duty Only" label, or similar).

CUS option is selectable in combination to U1 only for BX $\geq$ 200K.

As specified under the ANSI C84.1 standard, the US power mains voltages and the corresponding rated voltages to be specified for the motor are indicated in the following table:




(F19)

Frequency	Mains voltage	$V_{mot}$
60 Hz	208 V	<b>200 V</b>
	240 V	<b>230 V</b>
	480 V	<b>460 V</b>
	600 V	<b>575 V</b>

BX motor with CUS option are available with the following nominal Voltage/Frequency combinations:

(F20)

	$V_{mot}$
BX ≤ 132	265/460 - 60 Hz
BX ≤ 180	230/460 - 60 Hz 330/575 - 60 Hz
BX ≥ 160 BX ≥ 200K BY ≥ 280K	460/800 - 60 Hz

CUS option is applicable onto 50 Hz operating motors as well (motors BX, MX excluded).

#### M7.6 Motors certified for India

**BIS**

Low voltage motors ≥0.12kW manufactured or imported in India must comply with the requirements of the Bureau of Indian Standards (BIS), and their nameplates bear the ISI mark.

BE, BX, BXN motors with power up to 7.5kW included, are available with the above mentioned certification and, when BIS option is selected, are provided with the nameplate reporting the following logo:



#### M7.7 China Compulsory Certification

**CCC**


Electric motors destined for sale in the People's Republic of China must be certified under the CCC (China Compulsory Certification) system. The following motors are available with CCC certification:

- BN/M motors under 0.12kW rated for S1 continuous duty.
- BN/M motors up to 7 Nm rated for S3 discontinuous duty cycle only.

These motors will show the following CCC mark:



CCC option is not available for servo - ventilated motors.



## M7.8 Motor certified for China (China Energy Label)

### CEL

In addition to the mandatory CCC certification specified above, low voltage motors  $\geq 0.75\text{kW}$  manufactured or imported in China must be certified and registered by the label office and provided with an energy label certifying they meet the energy efficiency levels as defined in GB18613-2012.


BX motors with power from 2.2 to 355kW included are available with the above mentioned certification and, when CEL option is selected, are provided with the following sticker applied to the motor:




Note: The CEL (China Energy Label) is not needed for discontinuous duty cycle and in case of servo-ventilated motors.

BX motors with CEL option are available with the following nominal Voltage/Frequency combinations:

(F21)

	$V_{mot}$
BX $\geq$ 200	380/660 - 50 Hz
100 $\leq$ BX $\leq$ 132	230/400 - 50 Hz
160 $\leq$ BX $\leq$ 180	400/690 - 50 Hz



### M7.9 Motors certified for Brazil

#### NBR

Brazilian laws regulate the manufacturing and importation of electric motor in the country. These have to be approved by NBR through a declaration of the motor efficiency level at INMETRO. Motor compliant to NBR must report the declared efficiency value and have to be provided with a specific NBR nameplate and the additional mark shown in picture below.




The NBR option is available for motors:

- BX with powers from 0.75 to 22 kW included
- BX... K with powers from 30 to 355 kW included

BX motors with NBR option are available with the following nominal Voltage/Frequency combinations:

(F22)

	$V_{mot}$
BX90SR ... BX160	220/380 - 60 Hz 220/440 - 60 Hz
BX 180	220/380 - 60 Hz 220/440 - 60 Hz 380/660 - 60 Hz
BX $\geq$ 200K	440/760 - 60 Hz

### M7.10 Motors certified for Australia


#### EECA

Electric motor covered by Australian/New Zealand's energy regulation must be listed in the national database Energyratig. Motor with EECA option are registered in the previously mentioned database and can be sold in Australia and New Zealand.

EECA option is available for BX ... K motor with power from 30 to 355kW included.

BX motors with EECA option are available with the following nominal Voltage/Frequency combinations:


(F23)

	$V_{mot}$
BX $\geq$ 200K	400/690 - 50 Hz

### M7.11 Insulation class

#### CL F


Bonfiglioli motors use class F insulating materials (enamelled wire, insulators, impregnation resins) as compared to the standard motor. In standard motors, stator windings over temperature normally stays below the 80 K limit corresponding to class B over temperature. A careful selection of insulating components makes the motors compatible with tropical climates and normal vibration. For applications involving the presence of aggressive chemicals or high humidity, contact Bonfiglioli Engineering for assistance with product selection.



## CL H

Motors manufactured in insulation class **H** are available at request.

(F24)

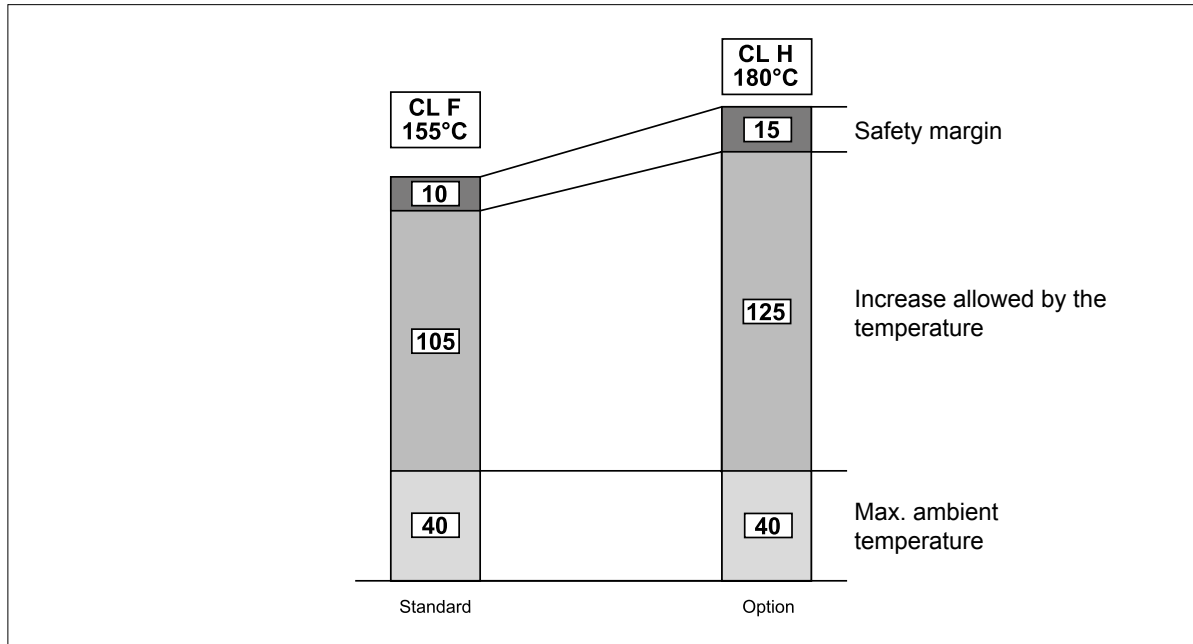

### M7.12 Type of duty

Unless otherwise specified, catalogue motor power refers to continuous duty S1. Any operating conditions other than S1 duty must be identified in accordance with duty cycle definitions laid down in standards CEI EN 60034-1. For duty cycles S2 and S3, the power increase co-efficient reported in the following table may be used. Please note that the table provided below applies to single-speed motors. As an alternative to S1 continuous duty, one of the following values can be specified at the product configuration stage (single speed motors only): S2, S3. The motor nameplate will be marked with an increased power rating to suit the type of duty, and with specific electrical data and a duty type of S2-30 min, S3-70% respectively.

BN and M motors can be configured for operation at duty cycle S2(30min) and S3(70%) as standard option, Other requests which are different in terms of % or min are considered a speciality. BXN and MXN motors can be configured as standard at S2=10min, S2=30min, S2=60min or S3=25%, S3=40%, S3=70%.

(F25)

	Type of duty						Contact us **
	S2			S3 *			
	Duration (min)			Intermittence (I)			
	10	30 (*)	60	25%	40%	70% (*)	
$f_m$	1.35	1.15	1.05	1.25	1.15	1.1	

\* Cycle duration must, in any event, be equal to or less than 10 minutes; if this time is exceeded, please contact our Technical Service.

\*\* For any duty cycle different from S1, S2-30min and S3-70% please contact Bonfiglioli's Technical Service.


(\*) Default values from options (tab. F05).

#### M7.12.1 Cyclic duration factor:

$$I = \frac{t_f}{t_f + t_r} \cdot 100 \quad (01)$$


$t_f$  = work time under constant load

$t_r$  = rest time



### M7.12.2 Limited duration duty S2


This type of duty is characterized by operation at constant load for a limited time, which is shorter than the time required to reach thermal equilibrium, followed by a rest period of sufficient duration to restore ambient temperature in the motor.

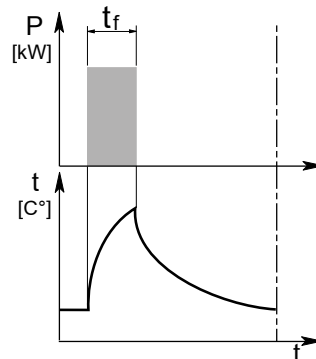

### M7.12.3 Periodical intermittent duty S3:


This type of duty is characterized by a sequence of identical operation cycles, each including a constant load operation period and a rest period.


For this type of duty, the starting current does not significantly influence overtemperature.

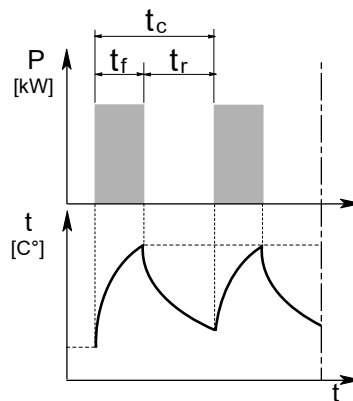

### M7.12.4 Duty with non-periodical load and speed variations S9:

This type of duty is characterized by a load and speed variation in which the motor operates generally non-periodically within the permissible operating range. This duty includes frequent overloads which may greatly exceed the full loads.

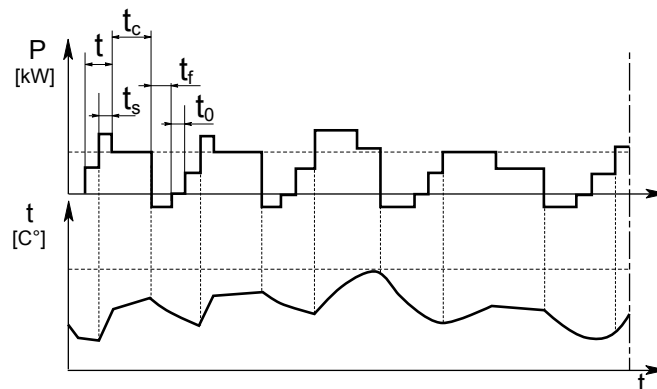




### M7.13 Inverter-controlled motors

The electric motors Bonfiglioli may be used in combination with PWM inverters with rated voltage at transformer input up to 500 V. Standard motors use a phase insulating system with separators, class 2 enamelled wire and class H impregnation resins (1600V peak-to-peak voltage pulse capacity and rise edge  $t_s > 0.1\mu s$  at motor terminals). Typical torque/speed curves referred to S1 duty for motors with base frequency  $f_b = 50$  Hz is reported in the table below. Because ventilation is somewhat impaired in operation at lower frequencies (about 30 Hz), standard motors with incorporated fan (IC411) require adequate torque derating or - alternately - the addition of a separate supply fan cooling.

Above base frequency, upon reaching the maximum output voltage of the inverter, the motor enters a steady-power field of operation, and shaft torque drops with ratio  $(f/f_b)$ . As motor maximum torque decreases with  $(f/f_b)^2$ , the allowed overloading must be reduced progressively.

(F26)

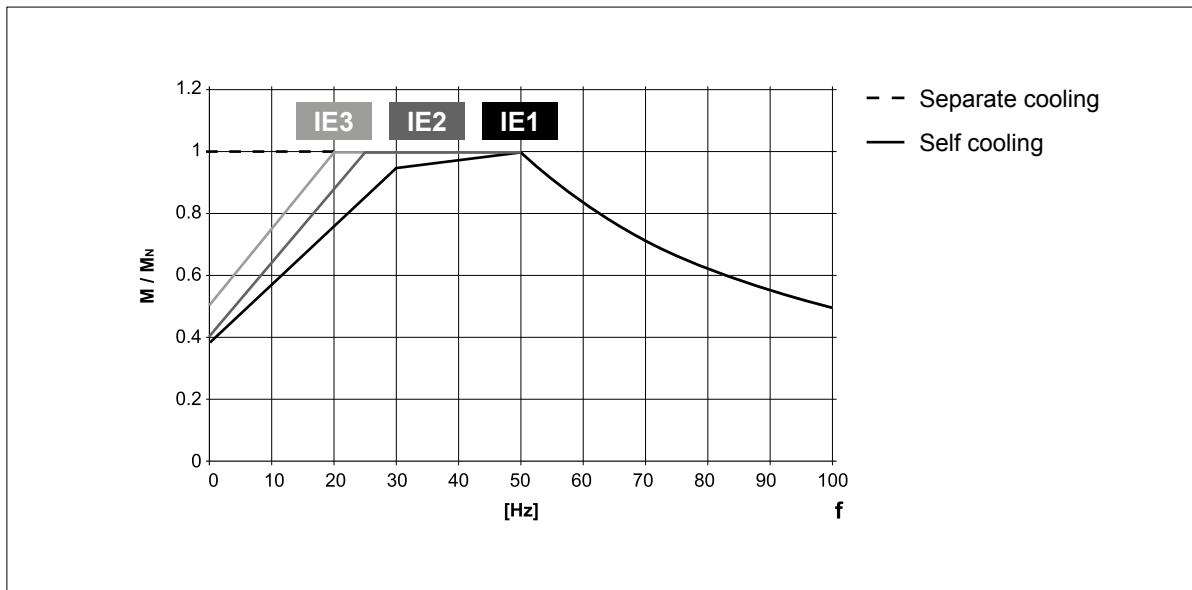


The following table reports the mechanical speed limit for motors operating above rated frequency:

(F27)

		n [min <sup>-1</sup> ]		
		2p	4p	6p
≤ BE 112 - BN 112	ME2, ME3 M05 ... M3	5200	4000	3000
≥ BE 132 - BN 132	ME4, ME5 M4, M5	4500	4000	3000
BX 63 ... BX 180	MX05 ... MX5		4000	
BX 200K			4500	
BX 225K ... BX 250K			3600	
BX 280K, BY 280K			2000	
BX 315K, BX 355K			2200	

Above rated speed, motors generate increased mechanical vibration and fan noise. Class B rotor balancing is highly recommended in these applications. Installing a separate supply fan cooling may also be advisable. Remote-controlled fan and brake (if fitted) must always be connected direct to mains power supply.



### M7.14 Permissible starts per hour, Z

The rating charts of brakemotors lend the permitted number of starts Z<sub>0</sub>, based on 50% intermittence and for unloaded operation.

The catalogue value represents the maximum number of starts per hour for the motor without exceeding the rated temperature for the insulation class F.


To give a practical example for an application characterized by inertia J<sub>c</sub>, drawing power P<sub>r</sub> and requiring mean torque at start-up M<sub>L</sub> the actual number of starts per hour for the motor can be calculated approximately through the following equation:

$$Z = \frac{Z_0 \cdot K_c \cdot K_d}{K_J} \quad (02)$$


where:

$K_J = \frac{J_m + J_c}{J_m}$	inertia factor
$K_c = \frac{M_a - M_L}{M_a}$	torque factor
$K_d =$	load factor, see the following table

(F28)

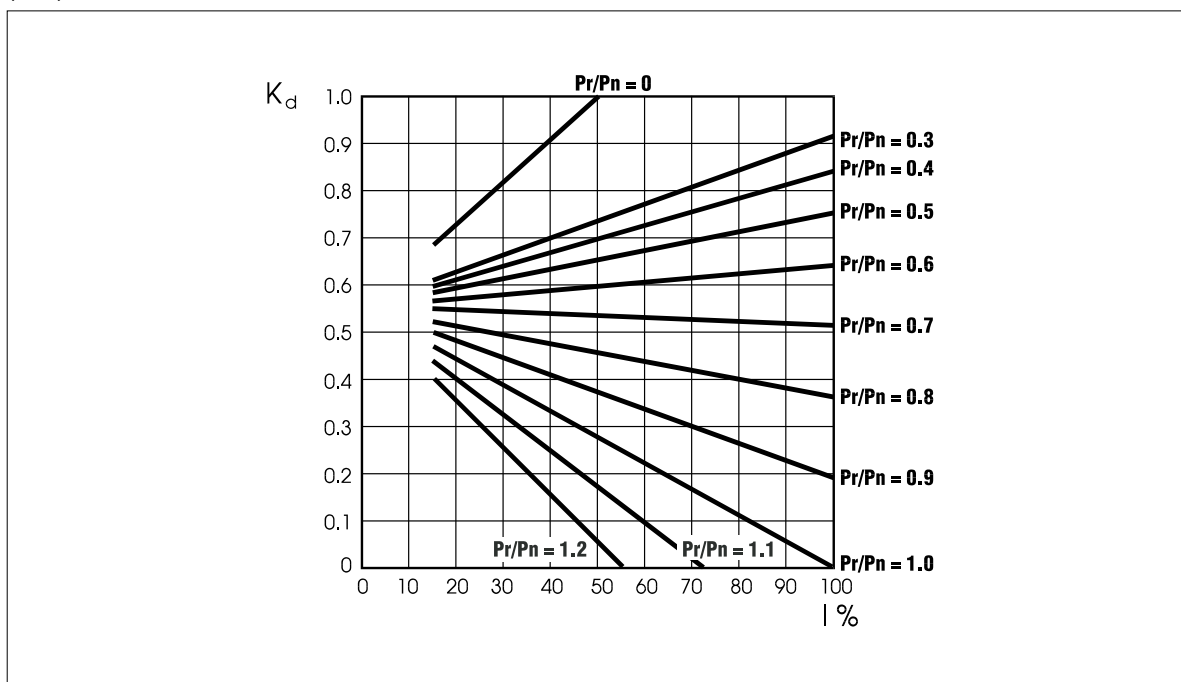

If actual starts per hour is within permitted value (Z) it may be worth checking that braking work is compatible with brake (thermal) capacity W<sub>max</sub> also given in tables (F38), (F41) and dependent on the number of switches (c/h).




## M8 BRAKE MOTORS - DIRECT CURRENT BRAKE FOR BX-BE-BX | MX-ME-M

### M8.1 Operation

Versions with incorporated brake use spring-applied DC (FD option) brakes.

All brakes are designed to provide fail-safe operation, meaning that they are applied by spring-action in the event of power failure.

(F29)

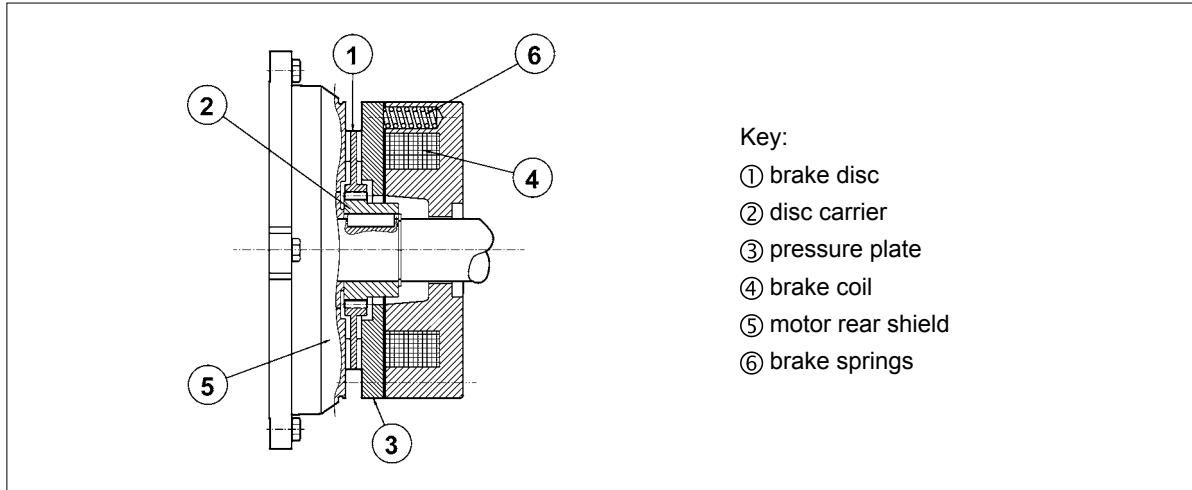


When voltage is interrupted, pressure springs push the armature plate against the brake disc. The disc becomes trapped between the armature plate and motor shield and stops the shaft from rotation.

When the coil is energized, a magnetic field strong enough to overcome spring action attracts the armature plate, so that the brake disc – which is integral with the motor shaft – is released.

### M8.2 Most significant features


- High braking torques (normally  $M_b \approx 2 M_n$ ), braking torque adjustment.
- Steel brake disc with double friction lining (low-wear, asbestos-free lining).
- Hexagonal seat on motor shaft fan end (N.D.E.) for manual rotation (not compatible with options PS, RC\*, TC\*, U1, U2, EN1, EN2, EN3, EN4, EN5, EN6).
- Manual release lever (options R and RM for FD).
- Corrosion-proof treatment on all brake surfaces.
- Insulation class F.

(\*) Not accessible without removing the fan cover




**Frame sizes:** BX 63 ... BX 180, BX200LAK ... BX 355MCK - BE 63 ... BE 180L - BN 63 ... BN 200L / MX05 ... MX5 - ME05 ... ME5 - M05 ... M5

(F30)

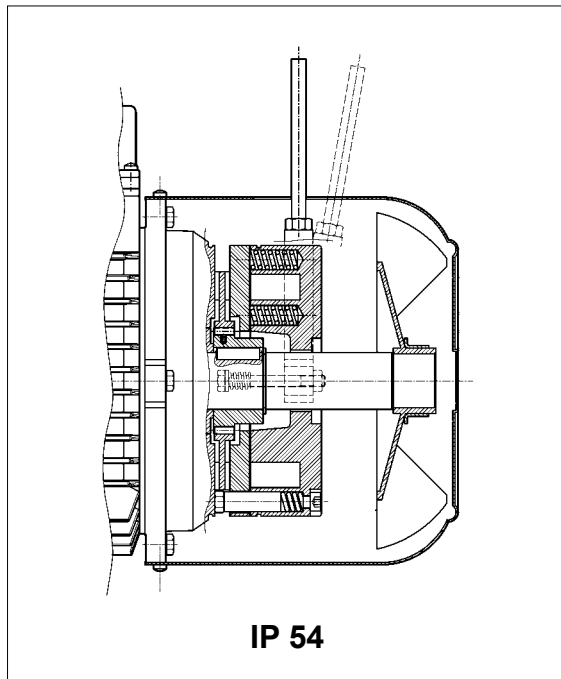

(F31)

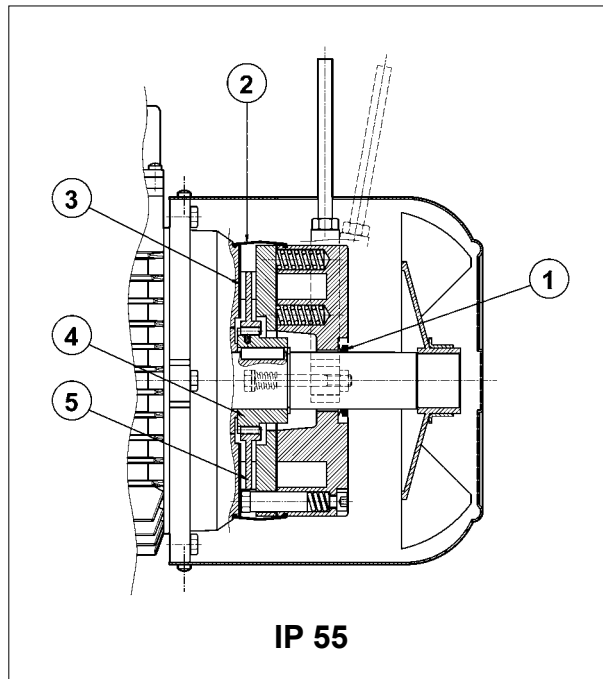

**Direct current** toroidal-coil electromagnetic brake bolted onto motor shield. Preloading springs provide axial positioning of magnet body.

Brake disc slides axially on steel hub shrunk onto motor shaft with anti-vibration device.


Brake torque factory setting is indicated in the corresponding motor rating charts. Braking torque may be modified by changing the type and/or number of springs.

At request, motors may be equipped with manual release lever with automatic return (**R**) or system for holding brake in the released position (**RM**).

See variant at paragraph "BRAKE RELEASE SYSTEMS" for available release lever locations.

FD brakes ensure excellent dynamic performance with low noise. DC brake operating characteristics may be optimized to meet application requirements by choosing from the various rectifier/power supply and wiring connection options available.

**For applications involving lifting and/or high hourly energy dissipation, contact Bonfiglioli's Technical Service.**



### M8.3 Degree of protection

The standard protection degree for BN - M, BE - ME, BX≤180 and MX is IP54, while for BX...K200 standard protection degree is IP55.

BN - M, BE - ME and BX≤180 - MX brakemotor with a standard protection degree IP54 can be requested with a protection degree IP55. If **IP55** is selected the following construction variants will be applied:

- ① V-ring at N.D.E. of motor shaft
- ② dust and water-proof rubber boot
- ③ stainless steel ring placed between motor shield and brake disc
- ④ stainless steel hub
- ⑤ stainless steel brake disc


### M8.4 FD brake power supply

A rectifier accommodated inside the terminal box feeds the DC brake coil. Wiring connection across rectifier and brake coil is performed at the factory.

Brake power supply voltage  $V_B$  is as indicated in the following table, regardless of mains frequency:












(F32)

FD brake supply voltages				
Brake power supply voltage V	FD brake			
	Power supply from the motor with rectifier NB SB	Power supply from the motor with rectifier NBR SBR	Separate power supply with rectifier	Power supply without rectifier
24	X	X	X	✓
100	X	X	X	✓
110	X	X	✓	X
115	X	X	✓	X
120	X	X	✓	X
127	X	X	✓	X
180	X	X	X	✓
208	✓	X	✓	X
220	✓	X	✓	X
230	✓	✓	✓	✓
240	✓	X	✓	X
255	✓	X	X	X
265	✓	X	X	X
280	✓	X	X	X
290	✓	X	X	X
330	✓	X	X	X
380	✓	X	✓	X
400	✓	✓	✓	X
415	✓	X	✓	X
440	✓	X	✓	X
460	✓	X	✓	X
480	✓	X	✓	X
500	✓	X	✓	X



The diode half-wave rectifier (VDC  $\approx$  0,45 x VAC) is available in versions **NB**, **SB**, **NBR** e **SBR**, as detailed in the table below:

(F33)

		brake		
			standard	on request
<b>BX 63 - BE 63 - BN 63</b>	<b>MX05 - ME05 - M05</b>	FD 02		
<b>BX 71 - BE 71 - BN 71</b>	<b>MX1 - ME1 - M1</b>	FD 03 FD 53		<b>SB</b>
<b>BX 80 - BE 80 - BN 80</b>	<b>MX2 - ME2 - M2</b>	FD 04		
<b>BX 90S - BE 90S - BN 90S</b>	—	FD 14		<b>SBR</b>
<b>BX 90L - BE 90L - BN 90L</b>	—	FD 05		
<b>BX 100 - BE 100 - BN 100</b>	<b>MX3 - ME3 - M3</b>	FD 15		<b>NBR</b>
—		FD 55		
<b>BX 112 - BE 112 - BN 112</b>	—	FD 06S		
<b>BX 132 - BE 132 - BN 132 - BN 160MR</b>	<b>MX4 - ME4 - M4</b>	FD 56 FD 06 FD 07		
<b>BX 160 - BE 160L - BN 160L - BN 180M</b>	<b>MX5 - ME5 - M5</b>	FD 08		
<b>BX 180 - BE 180L - BN 180L - BN 200M</b>	—	FD 09		
<b>BX 200LAK</b>	—	FD 8		
<b>BX 225SAK - BX 225SBK</b>	—	FD 9		
<b>BX 250MAK</b>	—	FD 10		
<b>BX 280SAK - BX 315SAK</b>	—	FD 1000		
<b>BX 315SBK - BX 315SCK</b>	—	FD 1600		
<b>BX 355SAK - BX 355MCK</b>	—	FD 2500		

Rectifier **SB** with electronic energizing control over-energizes the electromagnet upon power-up to cut brake release response time and then switches to normal half-wave operation once the brake has been released.

Use of the **SB** rectifier is mandatory in the event of:


- high number of operations per hour
- reduced brake release response time
- brake is exposed to extreme thermal stress

Rectifiers **NBR** or **SBR** are available for applications requiring quick brake intervention (braking condition re-instatement) response.

These rectifiers complement the **NB** and **SB** types as their electronic circuit incorporates a static switch that de-energizes the brake quickly in the event voltage is missing.

This arrangement ensures short brake release response time with no need for additional external wiring and contacts.

Optimum performance of rectifiers **NBR** and **SBR** is achieved with separate brake power supply.



### M8.5 FD brake technical specifications

The table below reports the technical specifications of DC brakes FD.

(F34)


Brake	Brake torque $M_b$ [Nm]			Release		Braking		$W_{max}$ per brake operation			W	P
	springs			$t_1$	$t_{1s}$	$t_2$	$t_{2c}$	[ J ]			[MJ]	[W]
	6	4	2	[ms]	[ms]	[ms]	[ms]	10 s/h	100 s/h	1000 s/h		
FD02	–	3.5	1.75	30	15	80	9	4500	1400	180	15	17
FD03	5	3.5	1.75	50	20	100	12	7000	1900	230	25	24
FD53	7.5	5	2.5	60	30	100	12					
FD04	15	10	5	80	35	140	15	10000	3100	350	30	33
FD14												
FD05	40	26	13	130	65	170	20	18000	4500	500	50	45
FD15	40	26	13	130	65	170	20					
FD06S	60	40	20	–	80	220	25	20000	4800	550	70	55
FD56	–	75	37	–	90	250	20	29000	7400	800	80	65
FD06		100	50		100	250	20					
FD07	150	100	50	–	120	200	25	40000	9300	1000	130	65
FD08*	250	200	170	–	140	350	30	60000	14000	1500	230	100
FD09**	400	300	200	–	200	450	40	70000	15000	1700	230	120
FD8	400			176	78	236	-	65000	7000	650	-	85
FD9	600			324	138	176	-	120000	12000	1200	-	100
FD10	800			480	194	172	-	100000	16000	2000	-	150
FD1000	1000			252	-	375	-	220000	27000	2700	-	300
FD1600	1600			366	-	498	-	230000	35000	3500	-	340
FD2500	2500			660	-	880	-	590000	61000	6100	-	530

\* brake torque values obtained with 9, 7 and 6 springs, respectively

\*\* brake torque values obtained with 12, 9 and 6 springs, respectively

- $t_1$  = brake release time with half-wave rectifier
- $t_{1s}$  = brake release time with over-energizing rectifier
- $t_2$  = brake engagement time with AC line interruption and separate power supply
- $t_{2c}$  = brake engagement time with AC and DC line interruption – Values for  $t_1$ ,  $t_{1s}$ ,  $t_2$ ,  $t_{2c}$  indicated in the tab. (F34) are referred to brake set at maximum torque, medium air gap and rated voltage
- $W_{max}$  = max energy per brake operation
- W = braking energy between two successive air gap adjustments
- $P_b$  = brake power absorption at 20 °C
- $M_b$  = static braking torque ( $\pm 15\%$ )
- s/h = starts per hour

The brake pad wear depends on the operating/ambient conditions (temperature, humidity, angular speed, specific pressure); Therefore the declared wear rate must be considered as indicative.



## M8.6 FD brake connections

On standard single-pole motors, the rectifier is connected to the motor terminal board at the factory.

For switch-pole motors and where a separate brake power supply is required, connection to rectifier must comply with brake voltage  $V_B$  stated in motor name plate.

**Because the load is of the inductive type, brake control and DC line interruption must use contacts from the usage class AC-3 to IEC 60947-4-1.**

Table (F35+F39) – Brake coil with power supply from motor terminals (DIR) and AC line interruption.

Delayed stop time  $t_2$  and function of motor time constants.

Mandatory when soft-start/stops are required.

Table (F36+F40) – Brake coil with separate power supply (SA) and AC line interruption.

Normal stop time independent of motor.


Achieved stop times  $t_2$  are indicated in the table (F34).


Table (F37+F41) – Brake coil with power supply from motor terminals (DIR) and AC/DC line interruption.

Quick stop with operation times  $t_{2c}$  as per table (F34).

Table (F38+F42) – Brake coil with separate power supply (SA) and AC/DC line interruption.

Stop time decreases by values  $t_{2c}$  indicated in the table (F34).

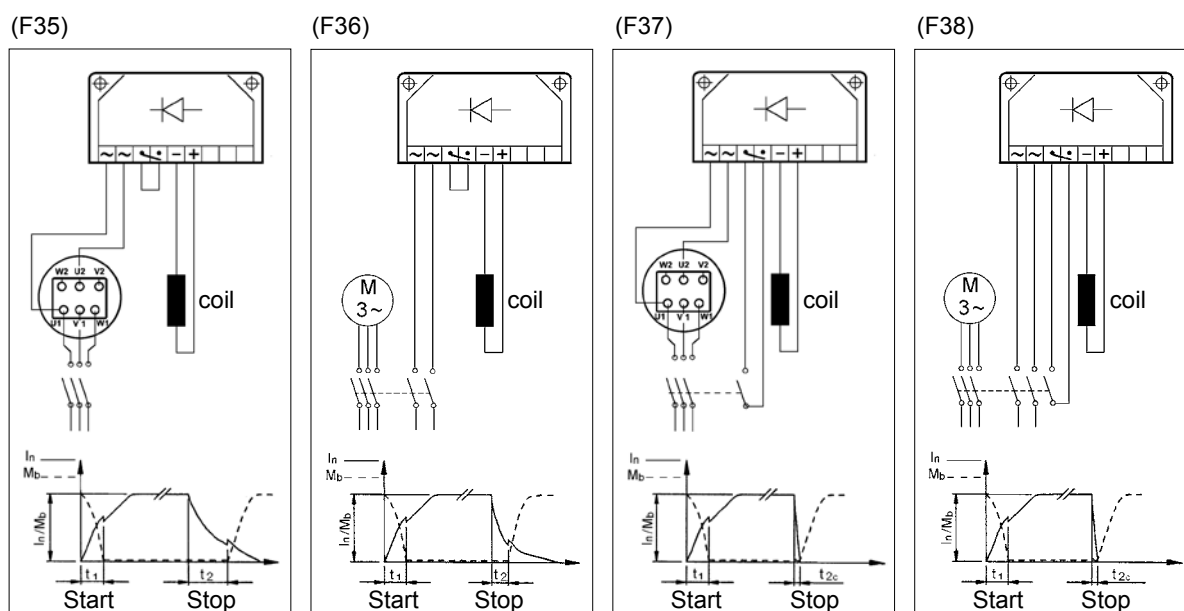




## M9 BRAKE RELEASE SYSTEMS

Spring-applied brakes type FD may be equipped with optional manual release devices. These are typically used for manually releasing the brake before servicing any machine or plant parts operated by the motor.

R


(F39)

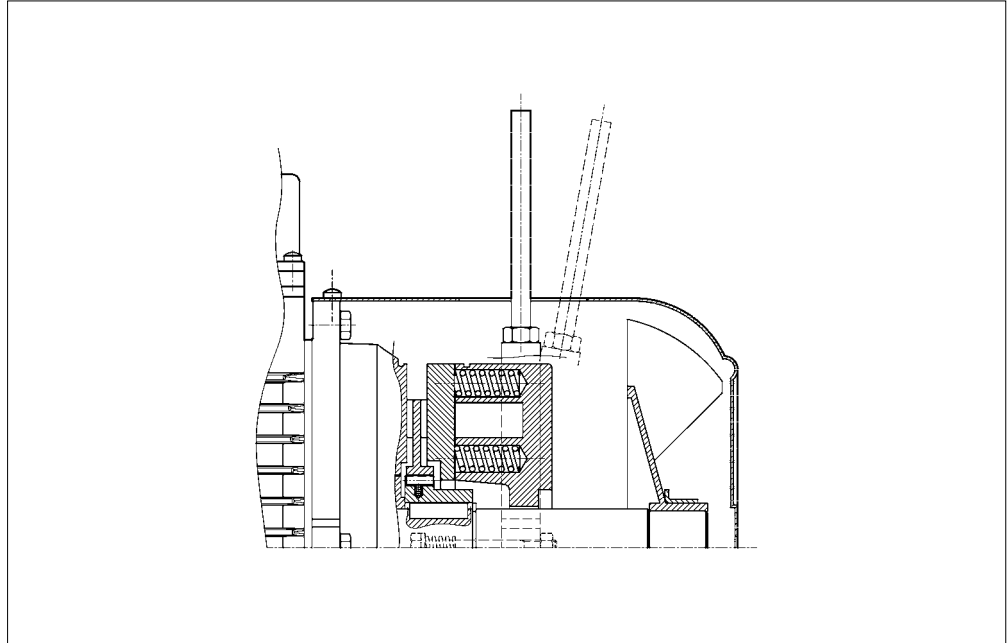


A return spring brings the release lever back in the original position.

RM

(F40)

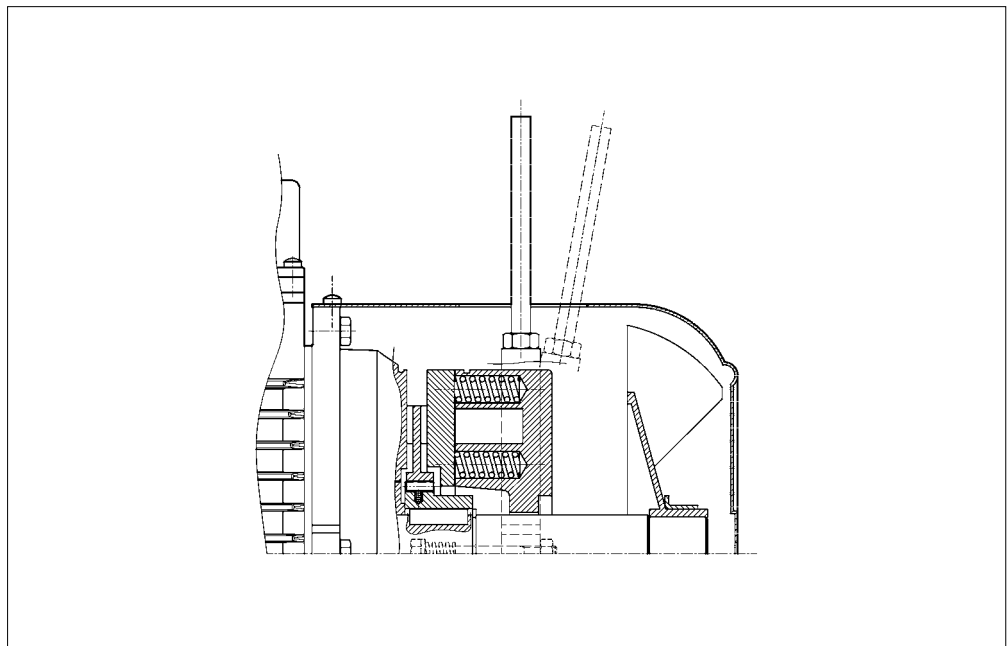



On brake motors type FD, if the option RM is specified, the release device may be locked in the "release" position by tightening the lever until its end becomes engaged with a brake housing projection. The availability for the various disengagement devices is charted here below:


(F41)

	R	RM
BX_FD BE_FD BN_FD	BX 63 ... BX 180 BX 200K ... BX 315K BE 63 ... BE 180 BN 63 ... BN 200	BX 63 ... BX 132 BE 63 ... BE 132 BN 63 ... BN 132 ● FD07
MX_FD ME_FD M_FD	MX05 ... MX5 ME05 ... ME5 M05 ... M5	MX05 ... MX4 ME05 ... ME4 M05 ... M4LA

### M9.1 Release lever orientation

Unless otherwise specified, the release lever is located 90° away from the terminal box – identified by letters [AB] in the diagram below – in a clockwise direction on both options R and RM. Alternative lever positions [AA], [AC] and [AD] are also possible when the corresponding option is specified:

(F42)

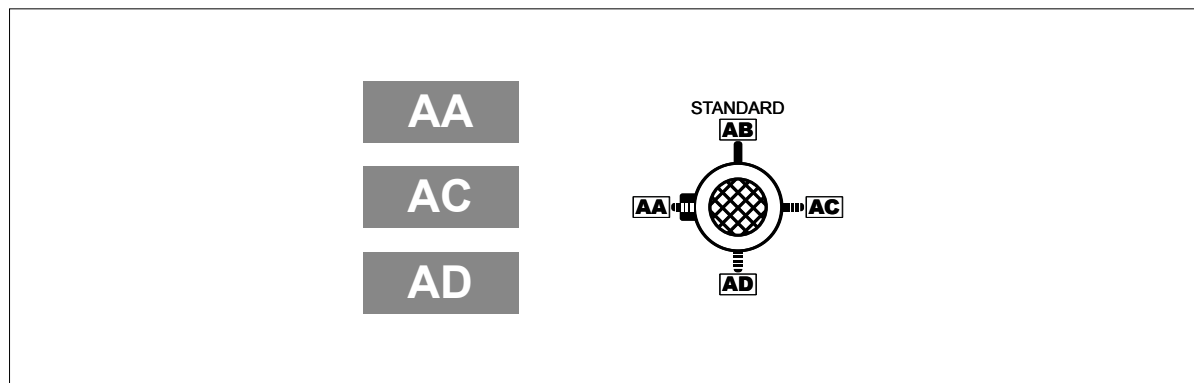

### M9.2 Separate brake supply

**...SA**

#### Separate AC brake supply

The brake coil is directly powered through an independent line, separated from the motor one.

**FD-NB/SB-SA:** the rated AC voltage which power the rectifier must be specified. E.G. SA 400 (V AC).


**...SD**

#### Separate DC brake supply

The brake coil is directly powered with a DC current and the rectifier is not present.

The rated coil voltage must be specified, E.G. SD 24 (V DC).

Note: for BX...K200 it is not possible to directly feed the brake from the motor terminal box, it is then necessary to select option SA or SD.





## M10 OPTIONS

### M10.1 Soft-start / stop

#### F1

An optional flywheel - option F1 - is available for applications requiring soft starting or stopping. The flywheel's added inertia uses up kinetic energy during starting and returns it back during braking, thus catering for more progressive and gradual shock loads. The optional flywheel is available for brake motors type BN-BE\_FD and M-ME\_FD with specific characteristics as detailed in the table below:

(F43)

Main data for flywheel of motore type: BN-BE_FD, M-ME_FD			
		Fly-wheel weight [Kg]	Fly-wheel inertia [Kgm <sup>2</sup> ]
BN 63 - BE 63	M05 - ME05	0.69	0.00063
BN 71 - BE 71	M1 - ME1	1.13	0.00135
BN 80 - BE 80	M2 - ME2	1.67	0.00270
BN 90 S - BN 90 L - BE 90 S - BE 90 LA	–	2.51	0.00530
BN 100 - BE 100	M3 - ME3	3.48	0.00840
BN 112 - BE 112	–	4.82	0.01483
BN 132 S - BN 132 M - BE 132 S - BE 132 M	M4 - ME4	6.19	0.02580

### M10.2 Capacitive filter

#### CF

An optional capacitive filter is available for brake motors type FD only. When the suitable capacitive filter is installed upstream of the rectifier (option CF), motors comply with the emission limits required by standard EN61000-6-3:2007 "Electromagnetic Compatibility – Generic Emission Standard – Part 6-3: Residential, commercial and light industrial environment".

BX $\geq$ 200LA and BX $\geq$ 200LAK motors comply with the emission limits required by standard EN 61000-6-3:2007 "Electromagnetic Compatibility - Generic Emission Standard - Part 6-3: residential, commercial and light industrial environment."

### M10.3 Thermal protective devices

In addition to the standard protection provided by the magneto-thermal device, motors can be supplied with built-in thermal probes to protect the winding against overheating caused, by insufficient ventilation or by an intermittent duty.

This additional protection should always be specified for servoventilated motors (IC416).

### M10.4 Thermistors

#### E3

These are semi-conductors having rapid resistance variation when they are close to the rated switch off temperature (150 °C). Variations of the  $R = f(T)$  characteristic are specified under DIN 44081, IEC 34-11 Standards. Positive temperature coefficient thermistors are normally used (also known as PTC "cold conductor resistors"). Thermistors cannot control relays directly and must be connected to a suitable disconnect device. Thus protected, three PTCs connected in series are installed in the winding, the terminals of which are located on the auxiliary terminal-board.


#### K1

The design characteristics of this sub-group of PTC thermistors allow them to be used as positive temperature coefficient sensors with variable resistance.

Functioning temperature range: 0°C ... +260°C.

Thermistors cannot control relays directly and must be connected to a suitable disconnect device.

Terminals (polarised) for 1 x KTY 84-130 are provided on an auxiliary terminal strip.



### M10.5 Bimetallic thermostates

#### D3

These types of protective devices house a bimetal disk. When the rated switch off temperature (150 °C) is reached, the disk switches the contacts from their initial rest position.

As temperature falls, the disk and the contacts automatically return to rest position.

Three bimetallic thermostates connected in series are usually employed, with normally closed contacts. The terminals are located on an auxiliary terminal-board.

### M10.6 Temperature sensors

The platinum elements resistance thermometers on the basis of PT100, PT1000 are used everywhere in the industrial temperature measurement where low to medium temperatures are measured.

They offer the advantage of meeting international standards (IEC 751 / DIN EN 60 751), have a good long-term stability, a reliable behaviour over temperature cycles and a wide temperature range as well as a high measurement accuracy and linearity.

The resistance thermometer has a chip for a temperature sensor, the resistance of which changes in relation to temperature according to a series of reproducible basic values. The changes in resistance are transferred as changes in current.

#### PT100

At 0 °C, the nominal resistance is adjusted to 100 Ω

### M10.7 Plug connector

#### CON

Three types of connectors (CON 1, CON 2, CON 3) are provided; they can be mounted in two different positions: right side of terminal box cover (C1D, C2D, C3D); left side of terminal box cover (C1S, C2S, C3S).

The option CON is applicable to single speed BN and M motors (2, 4, 6, 8 poles), and BX / BE and MX / ME motors on the sizes specified on the following table. All double speed motors are excluded.


The connectors CON 1 / CON 2 are available for BX-BE/MX-ME and BN/M motors without brake and for brake-motors equipped with DC brake type FD, for the motor sizes listed below.

**The male connector (with pins) is mounted on the motor, the female connector is not provided. With CON option, the winding connection is always Y.**

With option U1 “forced ventilation”, the fan unit supply is available inside the separate terminal box fixed to fan cover. With options EN1...EN6, the encoder connection is made by a cable not connected to the motor plug connector.


The CON option is not applicable to brakemotors equipped with AC brake type FA.

The CON option is not available when at least one of the next options are selected: the U2, CUS, IC.




## Specifications


(F46)

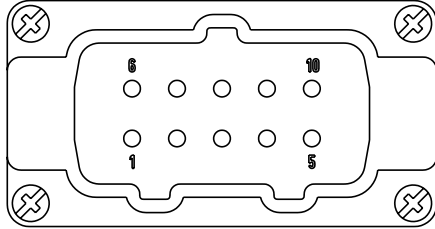
Option	CON 1
Motor size	<b>BX 63 ... BX 112 / MX05, MX3 / BE 63 ... BE 112 / ME05 ... ME4 BN 63 ... BN 112 / M05 ... M3</b>
Connector view	
Type of connector	Harting Han 10ES
Housing	Han EMC 10B with 2 levers
Numbers of pins - nominal current	10 x 16A
Voltage	500 Vac
Contact connection	Screw terminals

(F44)

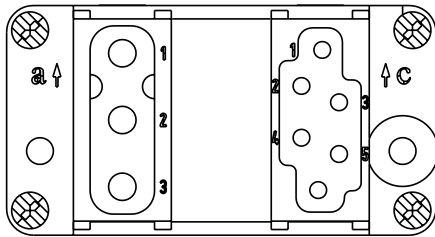
Option	CON 2
Motor size	<b>BX 63 ... BX 132 / MX05, MX3 / BE 63 ... BE 132 / ME05 ... ME4 BN 63 ... BN 160MR / M05 ... M4</b>
Connector view	
Type of connector	Harting Han Modular
Housing	Han EMC 10B with 2 levers
Module type	Module C + Module E + Module E
Numbers of pins - nominal current	3 x 36A / 6 x 16A
Voltage	500 Vac
Contact connection	Crimping contacts

(F45)

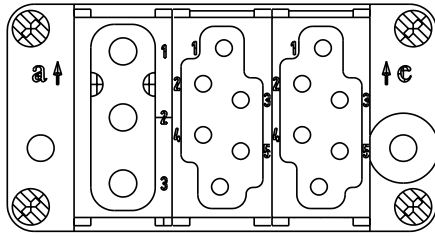Option	CON 3
Motor size	<b>BX 63 ... BX 132M / MX05, MX3 / BE 63 ... BE 132 / ME05 ... ME4 / BN 63 ... BN 160MR / M05 ... M4</b>
Connector view	
Type of connector	Harting Han Modular
Housing	Han EMC 10B with 2 levers
Module type	Module C + Module E + Module E
Numbers of pins - nominal current	3 x 36A / 6 + 6 x 16A
Voltage	500 Vac
Contact connection	Crimping contacts





(F47)

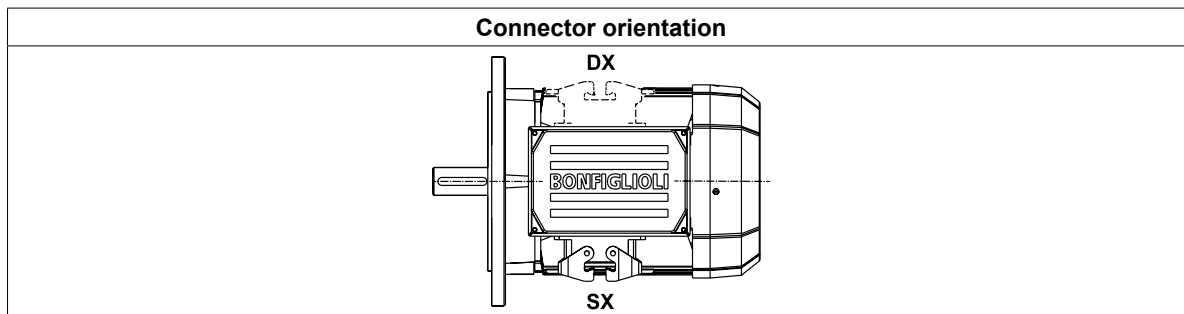

(F48)



**Motors without brake dimensions**

		AD (mm)	AF (mm)	AH (mm)	LL (mm)	V(*) (mm)
<b>BX 63 - BE 63 - BN 63</b>	<b>MX05 - ME05 - M05</b>	136	110	45	165	4.5
<b>BX 71 - BE 71 - BN 71</b>	<b>MX1 - ME1 - M1</b>	149	110	45	165	15.5
<b>BX 80 - BE 80 - BN 80</b>	<b>MX2 - ME2 - M2</b>	160	110	45	165	16.5
<b>BX 90 - BE 90 - BN 90</b>	<b>MX3</b>	162	110	45	165	31.5
<b>BX 100 - BE 100 - BN 100</b>	<b>MX3 - ME3 - M3</b>	171	110	45	165	37.5
<b>BX 112 - BE 112 - BN 112</b>	<b>MX4</b>	186	110	45	165	39
<b>BX 132 - BE 132 - BN 132</b>	<b>MX4 - ME4 - M4</b>	210	140	45	188	45.5
<b>BN 160MR</b>	—	210	140	45	188	161


(\*) Dimension valid only for motors BX, BE and BN.

(F49)

**Motors with FD brake dimensions**

		AD (mm)	AF (mm)	AH (mm)	LL (mm)	V(*) (mm)
<b>BX 63 - BE 63 - BN 63</b>	<b>MX05 - ME05 - M05</b>	136	110	45	165	4.5
<b>BX 71 - BE 71 - BN 71</b>	<b>MX1 - ME1 - M1</b>	149	110	45	165	1.5
<b>BX 80 - BE 80 - BN 80</b>	<b>MX2 - ME2 - M2</b>	160	110	45	165	18.5
<b>BX 90 - BE 90 - BN 90</b>	—	162	110	45	165	39.5
<b>BX 100 - BE 100 - BN 100</b>	<b>MX3 - ME3 - M3</b>	171	110	45	165	63.5
<b>BX 112 - BE 112 - BN 112</b>	—	186	110	45	165	75
<b>BX 132 - BE 132 - BN 132</b>	<b>MX4 - ME4 - M4</b>	210	140	45	188	122
<b>BN 160MR</b>	—	210	140	45	188	161

(\*) Dimension valid only for motors BN and BX



### M10.8 Control of brake operation

This variant specifies the presence of electromechanical sensors designed to provide real-time feedback on the brake's condition.


#### MSW

The microswitch can be set in order to obtain from it a signal related to the attraction/release of anchor plate, or it can be set in order to give feedback when the air gap reaches the maximum value.

**MSW option is available for brakes FD03...FD09.**

The microswitch is provided with three lead wires (NC, NO, COM). The next figure shown the main components of the brake equipped with microswitch.

(F50)

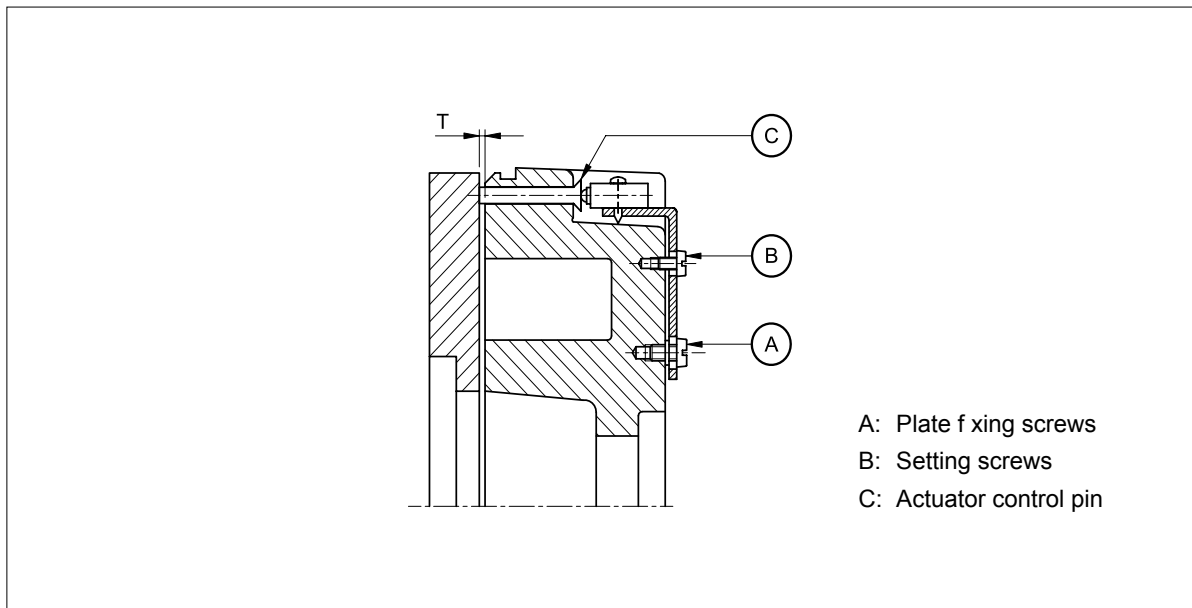


### M10.9 Additional cable entry for brakemotors

#### IC

The terminal box cover of brakemotors BN 63 ... BN 160MR - M05 ... M4L is provided with two additional cable entry M16 x 1.5 (one cable entry per side).

The terminal box cover of brakemotors BN 160 ... BN 200 - M5 is provided with an additional cable entry M16 x 1.5 next to the cable entry used for the brake.



### M10.10 Anti-condensation heaters

**H1**


**NH1**

Where an application involves high humidity or extreme temperature fluctuation, motors may be equipped with an anti-condensate heater.

A single-phase power supply is available in the auxiliary terminal board inside the main terminal box.

Values for the absorbed power are listed here below:

(F52)

	H1	NH1
	1~ 230V ± 10% P [W]	1~ 115V ± 10% P [W]
BX 63 ... BX 80 BE 63 ... BE 80 BN 56 ... BN 80	10	10
BX 90 ... BX 132 BE 90 ... BE 132MB BN 90 ... BN 160MR	25	25
BX 160...BX 180 BX 200K ... BX 250K BE 160, BE 180 BN 160, BN 200	50	50
BY 280K BX 280K	60	60
BY 315K ... BY 355K BX 315K ... BX 355K	120	120

#### Warning!

Always remove power supply to the anti-condensate heater before operating the motor.

### M10.11 Tropicalization

**TP**


When option **TP** is specified, motor windings receive additional protection for operation in high humidity and temperature conditions.


### M10.12 Second shaft extension

**PS**

This option is not compatible with variants RC, TC, U1, U2, EN1, EN2, EN3, EN4, EN5, EN6, EN7, EN8. For shaft dimensions please see motor dimensions tables.

(F51)

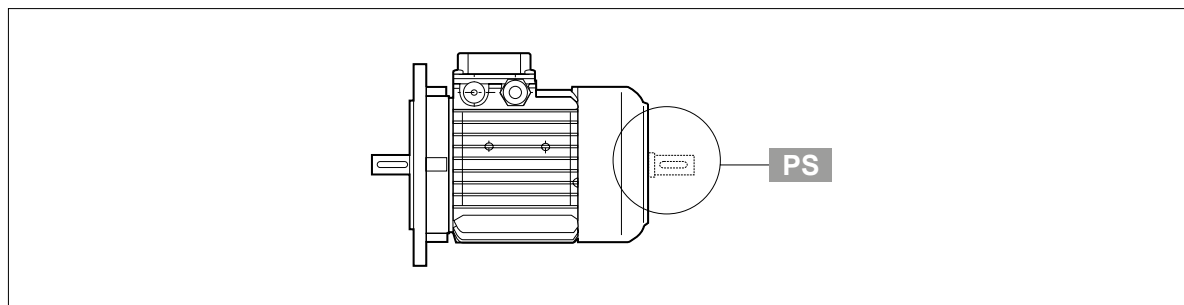



### M10.13 Backstop device


**AL**

**AR**


For applications where backdriving must be avoided, motors equipped with an anti run-back device can be used (available for the MX/ME and M series only). While allowing rotation in the direction required, this device operates instantaneously in case of a power failure, preventing the shaft from running back. The anti run-back device is life lubricated with special grease for this specific application. When ordering, customers should indicate the required rotation direction, AL or AR.

Never use the anti run-back device to prevent reverse rotation caused by faulty electrical connection. Table (F62) shows rated and maximum locking torques for the anti run-back devices. A diagram of the device can be seen in Table (F63). Overall dimensions are same as the corresponding brake motor. The direction of free rotation is described in the "MOTOR OPTIONS" section of specifically dedicated sections to gear units.


(F53)

	Rated locking torque	Max. locking torque	Release speed
	[Nm]	[Nm]	[min <sup>-1</sup> ]
<b>MX1 - ME1 - M1</b>	6	10	750
<b>MX2 - ME2 - M2</b>	16	27	650
<b>MX3 - ME3 - M3</b>	54	92	520
<b>MX4 - ME4 - M4</b>	110	205	430

(F54)

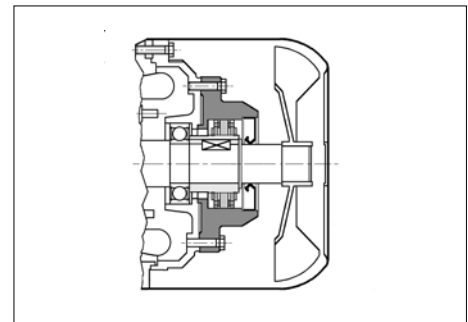

The direction of free rotation allowed for AR and AL option is shown below:

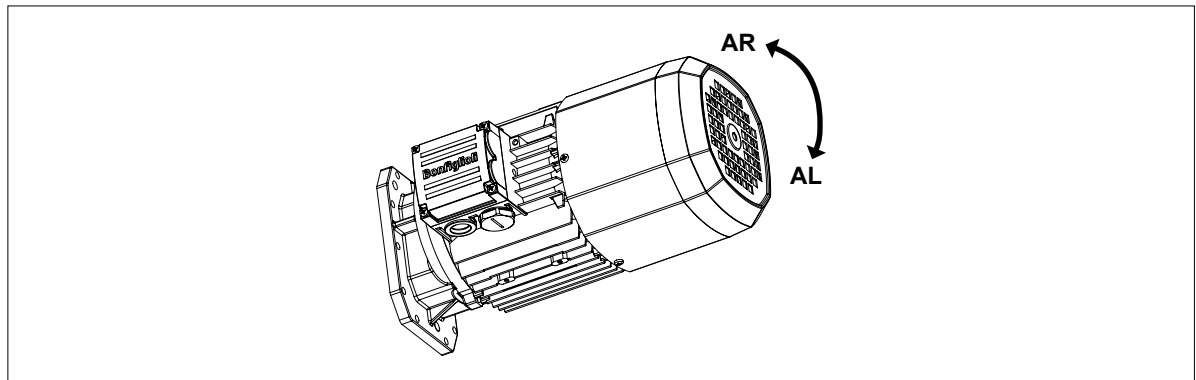

### M10.14 Rotor balancing

**RV**


Where low noise is a priority requirement, the option RV ensures reduced vibration in accordance with vibration class B.

The table below reports effective velocity of vibration for normal (A) and B grade balancing.

(F55)

Vibration level	Angular velocity  n [min <sup>-1</sup> ]	Limits of the vibration velocity (mm/s)  <b>BY 280K ≤ H ≤ BY 355K</b> <b>BX 63 ≤ H ≤ BX 355MK</b> <b>BE 63 ≤ H ≤ BE 180L</b> <b>BN 56 ≤ H ≤ BN 200</b>
<b>A</b>	600 < n < 3600	1.6
<b>B</b>	600 < n < 3600	0.70

Values are obtained from measurements on freely suspended motor during no-load operation; tolerance ±10%.



### M10.15 Ventilation

Motors are cooled through outer air blow (IC 411 according to CEI EN 60034-6) and are equipped with a plastic radial fan, which operates in both directions.

Ensure that fan cover is installed at a suitable distance from the closest wall so to allow air circulation and servicing of motor and brake, if fitted.

Motor is cooled by an axial fan with independent power supply and fitted on the fan cover (IC 416 cooling system).

This version is used in case of motor driven by inverter so that steady torque operation is possible even at low speed or when high starting frequencies are needed.

Brake motors of motors with rear shaft projection (PS option) are excluded.

This variant has two different models, called U1 and U2, having the same longitudinal size. Longer side of fan cover (DL) is specified for both models in the table below. Overall dimension can be reckoned from motor size table.

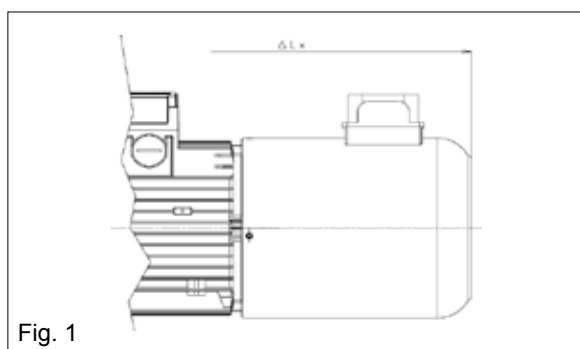


Fig. 1

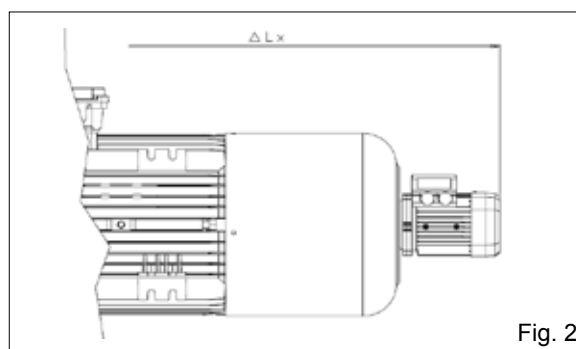


Fig. 2

(F56)



Extra length for servovenilated motors					
		$\Delta L_1$	$\Delta L_2$	$\Delta L_3$	$\Delta L_4$
<b>BX 71 - BE 71 - BN 71</b>	<b>MX 1 - ME 1 - M 1</b>	91	30	91	65
<b>BN 80 - BE 80</b>	<b>M 2 - ME 2</b>	125	54	125	79
<b>BX 80<sup>(1)</sup></b>	<b>MX 2<sup>(1)</sup></b>	80	67	80	67
<b>BN 90 - BE 90 - BX 90</b>	<b>MX 2<sup>(2)</sup></b>	132	49	132	85
<b>BN 100 - BE 100</b>	<b>M 3 - ME 3</b>	117	29	117	89
—	<b>MX 3SA - MX 3SB</b>	117	88	117	88
<b>BX 100</b>	<b>MX 3LA - MX 3LB</b>	135	88	135	88
<b>BN 112 - BE 112</b>	—	127	33	127	83
<b>BX 112</b>	—	136	90	136	90
<b>BN 132 - BE 132 - BN 160MR</b>	<b>M 4 - ME 4</b>	158	51	158	122
<b>BE 132MB</b>	<b>M 4LC - ME 4LB</b>	123	27	123	98
<b>BX 132SB<sup>(1)</sup></b>	<b>MX 4SA - MX 4SB<sup>(1)</sup></b>	158	142	158	122
<b>BX 132MA<sup>(1)</sup></b>	<b>MX 4LA<sup>(1)</sup></b>	125	118	98	118
<b>BX 132<sup>(2)</sup></b>	<b>MX 4LA<sup>(2)</sup> - MX 4SB<sup>(2)</sup></b>	171	83	171	100
<b>BN 160 - BE 160</b>	<b>M 5 - ME 5</b>	181	181	253	211
<b>BX 160</b>	<b>MX 5</b>	315	211	249	211
<b>BN 180M</b>	—	181	181	253	211
<b>BN 180L - BE 180 - BN 200</b>	—	181	181	263	211
<b>BX 180</b>	—	341	201	263	201
<b>BX 200K</b>	—	260	260	385	440
<b>BY 225K - BY 250K</b> <b>BX 225K - BX 250K</b>	—	320	320	405	386
<b>BY 280K - BY 315K</b> <b>BX 280K - BX 315K</b>	—	430	430	580	460
<b>BY 355K</b> <b>BX 355K</b>	—	640	640	775	640

Fig. 1

Fig. 2

$\Delta L_1$  = Standard motor + U1 - delta compared to STD.


$\Delta L_2$  = Brakemotor + U1 - delta compared to FD.

$\Delta L_3$  = Standard motor + Encoder + U1 - delta compared to STD.

$\Delta L_4$  = Brakemotor + Encoder + U1 - delta compared to FD.

(1) = no CUS no NBR.

(2) = CUS or NBR




## U1



Fan wiring terminals are housed in a separate terminal box.

In brake motors of size BX 71 ... BX 160 - BE 71 ... BE 160 - BN 71 ... BN 160MR, MX1 - MX5 - ME1 ... ME5 - M1 ... M5 with **U1** model, the release lever cannot be positioned to AA.

This option can be selected for motors compliant with CSA and UL standards (CUS option), only for BX ≥ 200K.

(F57)




		V a.c. ±10%	Hz	P [W]	I [A]
<b>BX 71 - BE 71 - BN 71</b>	<b>MX1 - ME1 - M1</b>	1 ~ 230	50 / 60	22	0.12
<b>BX 80 - BE 80 BN 80</b>	<b>MX2 - ME2 M2</b>			22	0.12
<b>BX 90 - BE 90 BN 90</b>	–			40	0.30
<b>BX 100 - BE 100 BN 100</b>	<b>MX3 - ME3 M3</b>			50	0.25
<b>BX 112 - BE 112 BN 112</b>	–	3 ~ 230Δ / 400Y	50 / 60	50	0.26 / 0.15
<b>BX 132 - BE 132 BN 132 ... BN 160MR</b>	<b>MX4 - ME4 M4L</b>			110	0.38 / 0.22
<b>BX 160 - BE 160 BN 160M ... BN 180M</b>	<b>MX5 - ME5 M5</b>			180	1.23 / 0.71
<b>BX 180 - BE 180 BN 180L ... BN 200L</b>	–	3 ~ 400Δ / 690Y	50	250	1.39 / 0.80
<b>BX 200K ... BX 250K</b>	–			250	0.64
<b>BY 280K .. BY 315K BX 280K ... BX 315MK</b>	–			750	1.7
<b>BY 315K .. BY 355K BX 315LK ... BX 355SK</b>	–			1500	3.3
<b>BY 355K BX 355MK</b>	–			3000	6.1



## U2


Fan terminals are wired in the motor terminal box.

The **U2** option does not apply to motors BX, BE, MX, ME and to motors with option CUS (compliant to norms CSA and UL).

(F58)



		V a.c. ±10%	Hz	P [W]	I [A]
<b>BN 71</b>	<b>M1</b>	1 ~ 230	50 / 60	22	0.12
<b>BN 80</b>	<b>M2</b>			22	0.12
<b>BN 90</b>	–			40	0.30
<b>BN 100</b>	<b>M3</b>	3 ~ 230Δ / 400Y	50 / 60	40	0.26 / 0.09
<b>BN 112</b>	–			50	0.26 / 0.15
<b>BN 132 ... BN 160MR</b>	<b>M4L</b>			110	0.38 / 0.22



## M10.16 Rain canopy




**RC**

The rain canopy protects the motor from dripping and avoids the ingress of solid bodies. It is recommended when motor is installed in a vertical position with the shaft downwards.

Relevant dimensions are indicated in the table below.

The drip cover is not compatible with variants PS, EN1, EN2, EN3, EN4, EN5, EN6.

(F59)

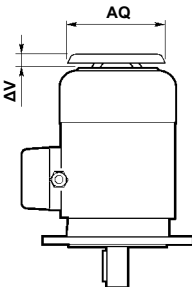		<b>AQ</b>	<b>ΔV</b>	
<b>BX 63 - BE 63 - BN 63</b>	<b>MX 05 - ME 05 - M 05</b>	118	24	
<b>BX 71 - BE 71 - BN 71</b>	<b>MX1 - ME1 - M1</b>	134	27	
<b>BX 80 - BE 80 BN 80</b>	<b>MX2 - ME2 M2</b>	152	25	
<b>BX 90 - BE 90 BN 90</b>	—	168	30	
<b>BX 100 - BE 100 BN 100</b>	<b>MX3 - ME3 M3</b>	190	28	
<b>BX 112 - BE 112 BN 112</b>	—	211	32	
<b>BX 132 - BE 132 BN 132 ... BN 160MR</b>	<b>MX4 - ME4 M4</b>	254	32	
<b>BX 160 - BE 160 BN 160M ... BN 180M</b>	<b>MX5 - ME5 M5</b>	302	36	
<b>BX 180 - BE 180 BN 180L ... BN 200L</b>	—	340	36	
<b>BX 200K</b>	—	423	55	
<b>BX 225K</b>	—	465	55	
<b>BX 250K</b>	—	514	55	
<b>BX 280K BY 280K</b>	—	567	100	
<b>BX 315K BY 315K</b>	—	645	100	
<b>BX 355K BY 355K</b>	—	740	120	

## M10.17 Textile canopy


**TC**

Option TC is a cover variant for textile industry environments, where lint may obstruct the fan grid and prevent a regular flow of cooling air.

This option is not compatible with variants EN1, EN2, EN3, EN4, EN5, EN6, PS, U1, U2.

Overall dimensions are the same as drip cover type RC.

TC option is not available for BX and BY motors.



### M10.18 Feedback units


Motors may be combined with six different types of encoders to achieve feedback circuits. Configurations with double-extended shaft (PS) and rain canopy (RC, TC) are not compatible with encoder installation.

- EN1** Incremental encoder,  $V_{IN} = 5$  V, line-driver output RS 422.
- EN2** Incremental encoder,  $V_{IN} = 10-30$  V, line-driver output RS 422.
- EN3** Incremental encoder,  $V_{IN} = 12-30$  V, push-pull output 12-30 V
- EN4** Encoder sin/cos,  $V_{IN} = 4.5-5.5$  V, output Sinus 0.5VPP.
- EN5** Absolute encoder singleturn, HIPERFACE® interface,  $V_{IN} = 7-12$  V.
- EN6** Absolute encoder multiturn, HIPERFACE® interface,  $V_{IN} = 7-12$  V.
- EN7** Incremental encoder Heavy Duty,  $V_{IN} = 12-30$  V, push-pull output 12-30 V.
- EN8** Incremental encoder Heavy Duty,  $V_{IN} = 12-30$  V, push-pull output 9-30 V.

Note: EN7 and EN8 available only for BY  $\geq 280$ K and BX  $\geq 200$ K

(F60)

	EN1	EN2	EN3	EN4	EN5	EN6	EN7	EN8	
Interface	TTL/RS 422	TTL/RS 422	HTL push-pull	Sinus 0.5 VPP	HIPERFACE®	HIPERFACE®	HTL push-pull	HTL push-pull	
Power supply voltage [V]	4...6	10...30	12...30	4.4...5.5	7...12	7...12	9...30		
Output voltage [V]	5	5	12...30	—	—	—	9...30		
No-load operating current [mA]	120	100	100	40	80	80	80		
No. of pulses per revolution	1024							2048	
Steps per revolution	—	—	—	—	15 bit	15 bit	-	-	
Revolutions	—	—	—	—	—	12 bit	-	-	
No. of signals	6 (A, B, Z + inverted signals)			6 (cos-, cos+, sin-, sin+, Z, Z)	—	—	6	6	
Max. output frequency [kHz]	600			200			200		
Max. speed [min <sup>-1</sup> ]	6000 (9000 min <sup>-1</sup> for 10 s )							6000	
Temperature range [°C]	-30 ... +100							-20 ... +85	
Protection class	IP 65							IP67	



(F61)

EN1, EN2, EN3, EN4, EN5, EN6, EN7, EN8		
		<b>L4</b>
<b>BN 63 ... BN 200</b>	<b>M05 ... M5</b>	65
<b>BE 63... BE180</b>	<b>ME05 ... ME5L</b>	65
<b>BX 63 ... BX 180</b>	<b>MX05 ... MX5L</b>	65
<b>BY 280K</b> <b>BX 200K ... BX 280K</b>	—	100
<b>BY 315K ... BY 355K</b> <b>BX 315K ... BX 355K</b>	—	100


If the encoder variant (option EN\_) is specified on motors along with the independent fan cooling (options U1, U2), the extra length of motor is coincident with the one present in catalogue chapter M12.15.

### M10.19 Insulated Bearings

**IB**

When IB option is selected the motor is equipped with insulated bearings at drive end. This prevent early bearings failures due to high frequency circulation currents.

NOTE: This option is available only for BY...K  $\geq$  280 and BX...K  $\geq$  280, and it is mandatory when the motor is operated through a variable speed drive.



## M10.20 Vertical Mounting

### VM

NOTE: This option is mandatory for BY...K  $\geq 280$  and BX...K  $\geq 200$ , when vertically mounted.  
When VM is selected the motor is delivered with specific arrangements.  
Furthermore, the vertical mounting position will also be reported on motor nameplate.

## M10.21 Surface protection

### C\_


When no specific protection class is requested, the painted (ferrous) surfaces of motors are protected to at least corrosivity class C2 (UNI EN ISO 12944-2). For improved resistance to atmospheric corrosion, motors can be delivered with C3 and C4 surface protection.

(F62)

SURFACE PROTECTION	Typical environments	Maximum surface temperature	Corrosivity class according to UNI EN ISO 12944-2
C3	Urban and industrial environments with up to 100% relative humidity (medium air pollution)	120°C	C3
C4	Industrial areas, coastal areas, chemical plant, with up to 100% relative humidity (high air pollution)	120°C	C4
C5M	Coast and offshore areas with high salt content.	120°C	C5M

Motors with optional protection to class C3 or C4 are available in a choice of colours. If no specific colour is requested (see the "PAINTING" option) motors are finished in RAL 7042 for BN/M, BE/ME and BX $\leq$ 180/MX and in Munsell blue 8B 4.5/3.25 for BX...K  $\geq 200$  and BY...K  $\geq 280$ .

Motors can also be supplied with surface protection for corrosivity class C5 according to UNI EN ISO 12944-2. Contact our Technical Service for further details.



## M10.22 Painting

### RAL

Gearboxes with optional protection to class C3 or C4 are available in the colours listed in the following table.  
(F63)

PAINTING	Colour	RAL number
<b>RAL7042*</b>	Traffic Grey A	7042
<b>RAL5010</b>	Gentian Blue	5010
<b>RAL9005</b>	Jet Black	9005
<b>RAL9006</b>	White Aluminium	9006
<b>RAL9010</b>	Pure White	9010
<b>Munsell blue 8B* 4.5/3.25</b>	Blue	MUNSELL 8B 4.5/3.25
<b>RAL7035</b>	Light Grey	7035
<b>RAL7001</b>	Silver Grey	7001
<b>RAL5015</b>	Sky Blue	5015
<b>RAL7037</b>	Dusty Grey	7037
<b>RAL5024</b>	Pastel Blue	5024

\* BX...K  $\geq$  200 and BY...K  $\geq$  280 Motors are standardly supplied in this colour with C3 protection unless specified differently.

NOTE – “PAINTING” options can only be specified in conjunction with “SURFACE PROTECTION” options.

## M10.23 Certificates

### ACM

#### Certificate of compliance of motors


The document certifies the compliance of the product with the purchase order and the construction in conformity with the applicable procedures of the Bonfiglioli Quality System.

Note: Not available for BX...K $\geq$ 200 and BY...K $\geq$ 280

### CC

#### Inspection certificate

The document entails checking on order compliance, the visual inspection of external conditions and instrumental testing of the electrical characteristics in unloaded conditions. Units inspected are sampled within the shipping batch and marked individually.



## M11 TABLES OF MOTORS CORRELATION


### M11.1 50 Hz Motors

(F65)



2 pole							
Efficiency class	IE1	IE2	IE3	IE1	IE2	IE3	
Pn [kW]	0.06						
	0.09						
	0.12						
	0.18	BN 63A 2			M 05A 2		
	0.25	BN 63B 2			M 05B 2		
	0.37	BN 71A 2			M 05C 2		
	0.55	BN 71B 2			M 1SD 2		
	0.75	BN 71C 2 BN 80A 2	BE 80A 2		M 1LA 2	ME 2SA 2	
	1.1	BN 80B 2	BE 80B 2		M 2SA 2	ME 2SB 2	
	1.5	BN 90SA 2	BE 90SA 2		M 2SB 2		
	1.85	BN 90SB 2					
	2.2	BN 90L 2	BE 90L 2		M 3SA 2		
	3	BN 100L 2	BE 100L 2		M 3LA 2	ME 3LB 2	
	4	BN 112M 2	BE 112M 2		M 3LB 2		
	5.5	BN 132SA 2	BE 132SA 2		M 4SA 2	ME 4SA 2	
	7.5	BN 132SB 2	BE 132SB 2		M 4SB 2	ME 4LA 2	
	9.2	BN 132M 2	BE 132MB 2		M 4LA 2	ME 4LB 2	
	11	BN 160MR 2 BN 160M 2	BE 160MA 2		M 4LC 2	ME 5SA 2	
	15	BN 160MB 2	BE 160MB 2		M 5SB 2	ME 5SB 2	
	18.5	BN 160L 2	BE 160L 2		M 5SC 2	ME 5LA 2	
22	BN 180M 2			M 5LA 2			
30	BN 200LA 2						

(F64)

4 pole								
Efficiency class	IE1	IE2	IE3	IE4	IE1	IE2	IE3	
Pn [kW]	0.06	BN 56A 4						
	0.09	BN 56B 4				M 0B 4		
	0.12	BN 63A 4	BE 63A 4	BX 63A 4		M 05A 4	ME 05A 4	MX 05A 4
	0.18	BN 63B 4	BE 63B 4	BX 63B 4		M 05B 4	ME 05B 4	MX 05B 4
	0.25	BN 63C 4		BX 63C 4				
	0.25	BN 71A 4	BE 71A 4	BX 71A 4		M 05C 4	ME 1SA 4	BX 1SA 4
	0.37	BN 71B 4	BE 71B 4	BX 71B 4		M 1SD 4	ME 1SB 4	BX 1SB 4
	0.55	BN 71C 4						
	0.55	BN 80A 4	BE 80A 4	BX 80A 4		M 1LA 4	ME 2SA 4	BX 2SA 4
	0.75	BN 80B 4	BE 80B 4	BX 80B 4		M 2SA 4	ME 2SB 4	MX 2SB 4
	1.1	BN 80C 4						
	1.1	BN 90S 4	BE 90S 4	BX 90S 4		M 2SB 4	ME 3SA 4	MX 3SA 4
	1.5	BN 90LA 4	BE 90LA 4	BX 90LA 4		M 3SA 4	ME 3SB 4	MX 3SB 4
	1.85	BN 90LB 4						
	2.2	BN 100LA 4	BE 100LA 4	BX 100LA 4		M 3LA 4	ME 3LA 4	MX 3LA 4
	3	BN 100LB 4	BE 100LB 4	BX 100LB 4		M 3LB 4	ME 3LB 4	MX 3LB 4
	4	BN 112M 4	BE 112M 4	BX 112M 4		M 3LC 4	ME 4SA 4	MX 4SA 4
	5.5	BN 132S 4	BE 132S 4	BX 132SB 4		M 4SA 4	ME 4SB 4	MX 4SB 4
	7.5	BN 132MA 4	BE 132MA 4	BX 132MA 4		M 4LA 4	ME 4LA 4	MX 4LA 4
	9.2	BN 132MB 4	BE 132MB 4	BX 160MA 4		M 4LB 4	ME 4LB 4	MX 5SA 4
	11	BN 160MR 4 BN 160M 4	BE 160M 4	BX 160MB 4		M 4LC 4	ME 5SA 4	MX 5SB 4
	15	BN 160L 4	BE 160L 4	BX 160L 4		M 5SB 4	ME 5LA 4	MX 5LA 4
	18.5	BN 180M 4	BE 180M 4	BX 180M 4		M 5LA 4		
	22	BN 180L 4	BE 180L 4	BX 180L 4				
	30	BN 200L 4		BX 200LAK 4				
	37			BX 225SAK 4				
	45			BX 225SBK 4				
	55			BX 250MAK 4				
	75			BX 280SAK 4	BY 280SCK 4			
	90			BX 280SBK 4	BY 280MAK 4			
	110			BX 315SAK 4	BY 315SCK 4			
	132			BX 315SBK 4	BY 315SDK 4			
	160			BX 315SCK 4	BY 315MBK 4			
	200			BX 355SAK 4	BY 355SAK 4			
	250			BX 355MAK 4				
315			BX 355MBK 4					
355			BX 355MCK 4					






(F66)

6 pole							
Efficiency class	IE1	IE2	IE3	IE1	IE2	IE3	
Pn [kW]	0.06						
	0.09	BN 63A 6			M 05A 6		
	0.12	BN 63B 6			M 05B 6		
	0.18	BN 71A 6			M 1SC 6		
	0.25	BN 71B 6			M 1SD 6		
		BN 71C 6					
	0.37	BN 80A 6			M 1LA 6		
	0.55	BN 80B 6			M 2SA 6		
	0.75	BN 80C 6	BE 90S 6		M 2SB 6		
		BN 90S 6					
	1.1	BN 90L 6	BE 100M 6		M 3SA 6	ME 3LA 6	
	1.5	BN 100LA 6	BE 100LA 6		M 3LA 6	ME 3LB 6	
	1.85	BN 100LB 6			M 3LB 6		
	2.2	BN 112M 6	BE 112M 6		M 3LC 6		
	3	BN 132S 6	BE 132S 6		M 4SA 6	ME 4SB 6	
	4	BN 132MA 6	BE 132MA 6		M 4LA 6	ME 4LA 6	
	5.5	BN 132MB 6	BE 160MA 6		M 4LB 6	ME 5SA 6	
	7.5	BN 160M 6	BE 160MB 6		M 5SA 6	ME 5SB 6	
9.2							
11	BN 160L 6			M 5SB 6			
15	BN 180L 6						
18.5	BN 200LA 6						
22							
30							



### M11.2 60 Hz Motors

(F67)



2 pole							
Efficiency class	IE1	IE2	IE3	IE1	IE2	IE3	
Pn [kW]	0.06						
	0.09						
	0.12						
	0.18	BN 63A 2			M 05A 2		
	0.25	BN 63B 2			M 05B 2		
	0.37	BN 71A 2			M 05C 2		
	0.55	BN 71B 2			M 1SD 2		
	0.75	BN 71C 2			M 1LA 2		
		BN 80A 2					
	1.1	BN 80B 2			M 2SA 2		
	1.5	BN 90SA 2			M 2SB 2		
	1.85	BN 90SB 2					
	2.2	BN 90L 2			M 3SA 2		
	3	BN 100L 2			M 3LA 2		
	3.7	BN 112M 2			M 3LB 2		
	5.5	BN 132SA 2			M 4SA 2		
	7.5	BN 132SB 2			M 4SB 2		
	9.2	BN 132M 2			M 4LA 2		
	11	BN 160MR 2			M 4LC 2		
		BN 160M 2					
15	BN 160MB 2			M 5SB 2			
18.5	BN 160L 2			M 5SC 2			
22	BN 180M 2			M 5LA 2			
30	BN 200LA 2						




(F68)


4 pole									
Efficiency class		IE1	IE2	IE3	IE4	IE1	IE2	IE3	
Pn [kW]	0.06	BN 56A 4							
	0.09	BN 56B 4				M 0B 4			
	0.12	BN 63A 4	BE 63A 4			M 05A 4			
	0.18	BN 63B 4	BE 63B 4			M 05B 4			
	0.25	BN 63C 4					M 05C 4		
		BN 71A 4	BE 71A 4						
	0.37	BN 71B 4	BE 71B 4			M 1SD 4			
	0.55	BN 71C 4					M 1LA 4		
		BN 80A 4	BE 80A 4						
	0.75	BN 80B 4	BE 80B 4	BX 90SR 4		M 2SA 4	ME 2SB 4	MX 2SB 4	
	1.1	BN 80C 4	BE 90S 4	BX 90S 4			M 2SB 4	ME 3SA 4	MX 3SA 4
		BN 90S 4							
	1.5	BN 90LA 4	BE 90LA 4	BX 90LA 4		M 3SA 4	ME 3SB 4	MX 3SB 4	
	1.85	BN 90LB 4							
	2.2	BN 100LA 4	BE 100LA 4	BX 100LA 4		M 3LA 4	ME 3LA 4	MX 3LA 4	
	3	BN 100LB 4	BE 100LB 4	BX 100LB 4		M 3LB 4	ME 3LB 4	MX 3LB 4	
	3.7	BN 112M 4	BE 112M 4	BX 112M 4		M 3LC 4	ME 4SA 4	MX 4SA 4	
	5.5	BN 132S 4	BE 132S 4	BX 132SB 4		M 4SA 4	ME 4SB 4	MX 4SB 4	
	7.5	BN 132MA 4	BE 132MA 4	BX 132MA 4		M 4LA 4	ME 4LA 4	MX 4LA 4	
	9.2	BN 132MB 4	BE 132MB 4	BX 160MA 4		M 4LB 4	ME 4LB 4	MX 5SA 4	
	11	BN 160MR 4	BE 160M 4	BX 160MB 4			M 4LC 4	ME 5SA 4	MX 5SB 4
		BN 160M 4							
	15	BN 160L 4	BE 160L 4	BX 160L 4		M 5SB 4	ME 5LA 4	MX 5LA 4	
	18.5	BN 180M 4	BE 180M 4	BX 180M 4		M 5LA 4			
	22	BN 180L 4	BE 180L 4	BX 180L 4					
	30	BN 200L 4		BX 200LAK 4					
	37			BX 225SAK 4					
	45			BX 225SBK 4					
	55			BX 280SAK 4					
	75			BX 280SBK 4					
90			BX 315SAK 4						
110			BX 315SBK 4						
132			BX 315SCK 4						
160			BX 355SAK 4						
200			BX 355SBK 4						
250			BX 355SCK 4						
315			BX 355MBK 4						
355			BX 355MCK 4						

(F69)


6 pole								
Efficiency class		IE1	IE2	IE3	IE1	IE2	IE3	
Pn [kW]	0.06							
	0.09	BN 63A 6			M 05A 6			
	0.12	BN 63B 6			M 05B 6			
	0.18	BN 71A 6				M 1SC 6		
		BN 71B 6						
	0.25	BN 71C 6				M 1SD 6		
		BN 80A 6						
	0.37	BN 80A 6				M 1LA 6		
	0.55	BN 80B 6				M 2SA 6		
	0.75	BN 80C 6						
		BN 90S 6				M 2SB 6		
	1.1	BN 90L 6				M 3SA 6		
	1.5	BN 100LA 6				M 3LA 6		
	1.85	BN 100LB 6				M 3LB 6		
	2.2	BN 112M 6				M 3LC 6		
	3	BN 132S 6				M 4SA 6		
	3.7	BN 132MA 6				M 4LA 6		
	5.5	BN 132MB 6				M 4LB 6		
	7.5	BN 160M 6				M 5SA 6		
	9.2							
11	BN 160L 6				M 5SB 6			
15	BN 180L 6							
18.5	BN 200LA 6							
22								
30								



M12 MOTOR RATING CHARTS BY

4 P		1500 min <sup>-1</sup> - S1														50 Hz									
		d.c. brake														Standard									
P <sub>n</sub> kW hp	 n min <sup>-1</sup>	M <sub>n</sub> Nm lb-in	I <sub>n</sub> 400V A	η%		cos φ	I <sub>s</sub> I <sub>n</sub>	M <sub>s</sub> M <sub>n</sub>	M <sub>a</sub> M <sub>n</sub>	KVA code	J <sub>m</sub> x 10 <sup>-4</sup>		IM B5		Mod	M <sub>b</sub>		J <sub>m</sub> x 10 <sup>-4</sup>		IM B5		CE			
				100%	75%						kgm <sup>2</sup>	lb-ft <sup>2</sup>	kg	lbs		Nm	lb-in	kgm <sup>2</sup>	lb-ft <sup>2</sup>	kg	lbs				
75	101	<b>BY 280SCK</b> 4	1487	481	4257	130	96.0	96.4	0.86	7.8	2.8	2.9	N/A	1.90	0.0045	725	1598	FD 100	1000	8850	1.89	0.0045	831	1832	•
90	121	<b>BY 280MAK</b> 4	1489	577	5106	165	96.1	96.1	0.82	8.9	2.8	3.2	N/A	2.30	0.0055	840	1852	FD 100	1000	8850	2.35	0.0056	946	2086	•
110	148	<b>BY 315SCK</b> 4	1491	704	6230	194	96.3	96.5	0.85	7.8	2.4	3.1	N/A	2.90	0.0069	1000	2205	FD 100	1000	8850	2.94	0.0070	1106	2438	•
132	177	<b>BY 315SDK</b> 4	1490	846	7487	238	96.4	96.4	0.83	8.9	2.6	3.1	N/A	3.20	0.0076	1065	2348	FD 160	1600	14160	3.25	0.0077	1233	2718	•
160	215	<b>BY 315MBK</b> 4	1490	1028	9098	278	96.6	96.8	0.86	8.1	2.8	3.0	N/A	3.90	0.0093	1220	2690	FD 160	1600	14160	3.95	0.0094	1388	3060	•
200	268	<b>BY 355SAK</b> 4	1491	1281	11337	345	96.7	96.7	0.87	7.3	2.4	2.7	N/A	5.90	0.0140	1610	3549	FD 250	2500	22125	5.95	0.0141	1778	3920	•


**BY-IE4**



M13 MOTORS DIMENSIONS BY


BY - IM B3

BY-IE4

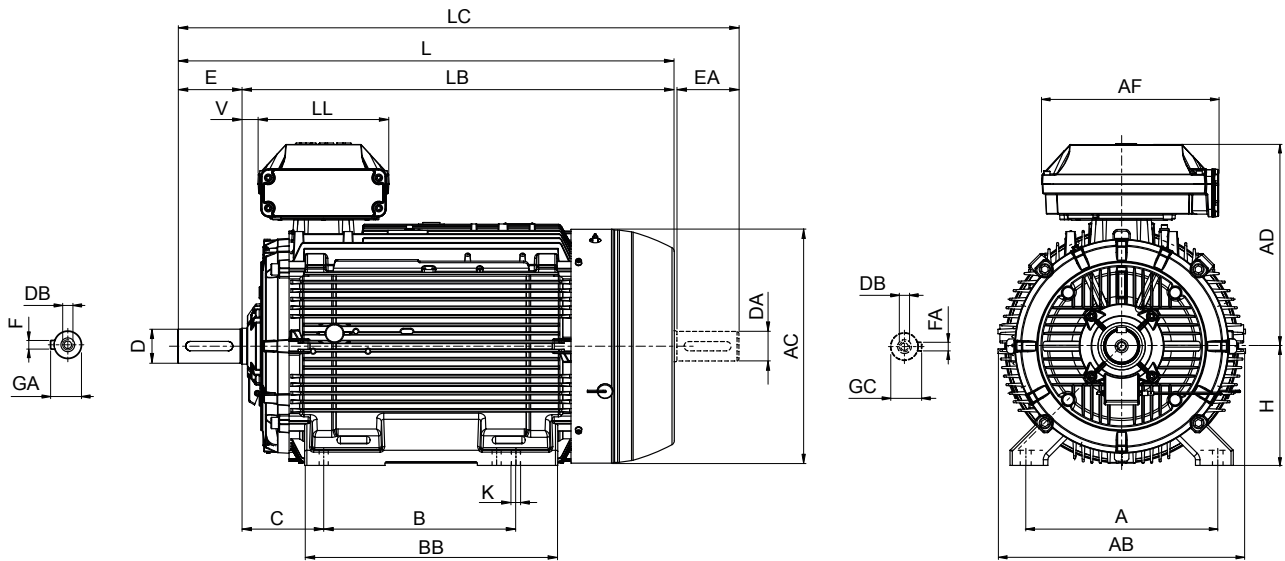


	Shaft					Housing						Motor									
	D DA	E EA	DB	GA GC	F FA	B	A	HA	BB	AB	K	C	H	AC	L	LB	LC	AD	AF	LL	V
BY 280SCK	75	140	M20	79.5	20	368	457	31	506	530	24	190	280	564	1088	948	1238	482	434	306	43
BY 280MAK	65 <sup>(1)</sup>	140 <sup>(1)</sup>		69 <sup>(1)</sup>	18 <sup>(1)</sup>	419			608						1190	1050	1340	505		23	
BY 315SCK	80	170	M20	85	22	406	508	40	558	590	28	216	315	639	1202	1032	1352	537	473	347	42
BY 315SDK	75 <sup>(1)</sup>			140 <sup>(1)</sup>	79.5 <sup>(1)</sup>				20 <sup>(1)</sup>						669	1313	1143			1463	
BY 315MBK	90	210	M24	95	25	457	610	45	722	700	35	254	355	740	1479	1269	1659	603	694	413	50
BY 355SAK	75 <sup>(1)</sup>			170 <sup>(1)</sup>	79.5 <sup>(1)</sup>																

N.B.: 1) These values refer to the rear shaft end (PS).




# BY - IM B5

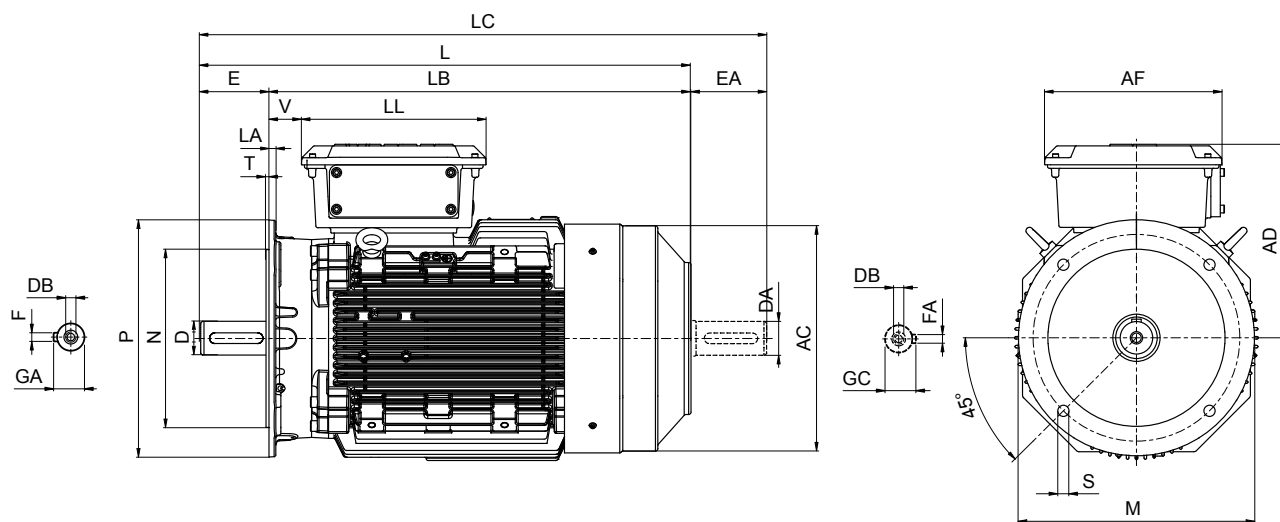

**BY-IE4**

	Shaft					Flange						Motor												
	D DA	E EA	DB	GA GC	F FA	M	N	P	S	T	LA	AC	L	LB	LC	AD	AF	LL	V					
<b>BY 280SCK</b>	75	140	M20	79.5	20	500	450	550	18	5	23	567	1086	946	1236	482	434	306	43					
<b>BY 280MAK</b>	65 <sup>(1)</sup>	140 <sup>(1)</sup>	M20	69 <sup>(1)</sup>	18 <sup>(1)</sup>								1190	1050	1340					505				
<b>BY 315SCK</b>	80	170	M20	85	22	600	550	660	23	6	25	645	1202	1032	1350	537	473	347	42					
<b>BY 315SDK</b>													75 <sup>(1)</sup>	140 <sup>(1)</sup>	M20					79.5 <sup>(1)</sup>	20 <sup>(1)</sup>	1313	1143	1451
<b>BY 315MBK</b>													100	210	M24					106	28	740	1479	1269
<b>BY 355SAK</b>	75 <sup>(1)</sup>	170 <sup>(1)</sup>	M20	79.5 <sup>(1)</sup>	20 <sup>(1)</sup>	740	680	800				740	1479	1269	1651	603	694	413	50					


N.B.: 1) These values refer to the rear shaft end (PS).




**M14 MOTOR RATING CHARTS BX-MX**


4 P		1500 min <sup>-1</sup> - S1															50 Hz													
		d.c. brake																												
P <sub>n</sub> kW	P <sub>n</sub> hp	n min <sup>-1</sup>	M <sub>n</sub> Nm	M <sub>n</sub> lb-in	I <sub>n</sub> A	In 400V	η%		cos φ	I <sub>s</sub> I <sub>n</sub>	M <sub>s</sub> M <sub>n</sub>	M <sub>a</sub> M <sub>n</sub>	KVA code	J <sub>m</sub> x 10 <sup>-4</sup> kgm <sup>2</sup>	J <sub>m</sub> x 10 <sup>-4</sup> lb-ft <sup>2</sup>	IM B5 Kg lbs	IM B5 lbs	Mod	M <sub>b</sub> Nm	M <sub>b</sub> lb-in	Z <sub>0</sub> 1/h	NB	SP	J <sub>m</sub> x 10 <sup>-4</sup> kgm <sup>2</sup>	J <sub>m</sub> x 10 <sup>-4</sup> lb-ft <sup>2</sup>	IM B5 Kg lbs	CE + BIS	CE + CEL		
							100%	75%																					50%	
0.12	0.16	<b>BX 63A</b>	4	1365	0.8	7.4	0.45	64.8	60	52.9	0.64	2.9	2.4	1.7	G	1.8	0.0043	3.2	7	FD 02	1.75	15	8900	11000	2.4	0.0057	4.9	11	•	•
0.18	0.25	<b>BX 63B</b>	4	1370	1.3	11.1	0.57	69.9	69.5	65.9	0.63	3.6	2.6	1.8	G	2.9	0.0069	5.1	11	FD 02	3.5	31	7000	9000	3.5	0.0083	6.8	12	•	•
0.25	0.33	<b>BX 63C</b>	4	1390	1.7	15.5	0.78	73.5	71.0	65.6	0.64	3.9	3.0	2.5	H	4.3	0.0102	5.4	12	FD 02	3.5	31	7800	10000	4.9	0.0116	7.0	16	•	•
0.25	0.33	<b>BX 71A</b>	4	1400	1.7	15.5	0.63	73.5	76.0	72.6	0.77	4.3	2.3	2.3	G	6.3	0.0150	5.7	13	FD 03	3.5	31	5400	7800	8.4	0.0190	8.4	19	•	•
0.37	0.55	<b>BX 71B</b>	4	1420	2.5	22.0	1.0	77.3	78.1	73.8	0.71	5.9	3.4	3.1	J	10	0.0230	7.3	16	FD 03	5	44	7000	10000	11.8	0.0280	10	22	•	•
0.55	0.75	<b>BX 80A</b>	4	1425	3.7	33	1.2	80.8	78.6	75.2	0.81	6.8	3.5	2.7	J	28	0.0664	12.2	26.9	FD 04	15	133	2400	4700	29.6	0.0702	16	36	•	•
0.75	1	<b>BX 80B</b>	4	1425	5.0	44.5	1.61	82.5	83.9	83.2	0.81	6.5	2.0	1.8	J	35	0.0831	16	35	FD 04	15	133	1700	3300	37	0.0878	20	44	•	•
1.1	1.5	<b>BX 90S</b>	4	1425	7.4	65.2	2.44	84.1	84.1	82.0	0.77	6.9	3.4	2.2	J	27	0.0641	16	35	FD 14	15	133	3700	6200	29	0.0688	20	44	•	•
1.5	2	<b>BX 90LA</b>	4	1420	10.1	89.3	3.3	85.3	86.2	84.9	0.78	6.3	3.1	1.9	J	31	0.0736	17	37	FD 05	26	230	2400	4300	35	0.0831	23	51	•	•
2.2	3	<b>BX 100LA</b>	4	1445	14.5	129	5.1	86.7	86.2	84.0	0.72	7.2	3.6	2.4	K	58	0.1376	24	53	FD 15	40	354	1500	2800	62	0.1471	31	68	•	•
3	4	<b>BX 100LB</b>	4	1445	19.8	175	6.7	87.7	87.7	86.0	0.74	7.6	3.9	2.6	K	73	0.1732	29	64	FD 15	40	354	1500	2700	77	0.1827	36	79	•	•
3.7	5	<b>BX 112M</b>	4	1450	24.4	216	7.6	88.4	89.7	87.7	0.79	8.6	4.0	2.5	L	130	0.3085	38	84	FD 06S	60	531	—	1100	139	0.3299	48	106	•	•
4	5.4	<b>BX 112M</b>	4	1445	26.0	234	8.1	88.6	88.9	87.6	0.80	8.1	3.8	2.5	J	130	0.3085	38	84	FD 06S	60	531	—	1100	139	0.3299	48	106	•	•
5.5	7.5	<b>BX 132SB</b>	4	1460	36.0	318	10.6	89.6	89.2	88.8	0.83	8.2	3.6	2.3	J	310	0.7356	57	126	FD 56	75	664	—	700	320	0.7594	70	154	•	•
7.5	10	<b>BX 132MA</b>	4	1460	49.0	434	15.0	90.4	90.9	90.2	0.80	8.4	3.8	2.5	K	360	0.8543	67	148	FD 06	100	885	—	700	370	0.8780	80	176	•	•
9.2	12.5	<b>BX 160MA</b>	4	1465	60.0	531	17.8	91.0	92.1	91.7	0.82	7.9	3.6	2.1	J	650	1.5425	95	209	FD 08	170	1505	—	620	725	1.7205	125	276	•	•
11	15	<b>BX 160MB</b>	4	1465	71.7	635	20.5	91.4	92.9	92.5	0.84	7.8	3.4	1.9	J	780	1.8509	110	243	FD 08	170	1505	—	470	855	2.0289	140	309	•	•
15	20	<b>BX 160L</b>	4	1465	98.0	865	28.1	92.1	93.2	92.6	0.82	9.0	4.1	2.3	K	890	2.1120	121	267	FD 08	200	1770	—	510	965	2.2900	151	333	•	•
18.5	25	<b>BX 180M</b>	4	1480	119	1056	32.9	92.6	94.1	93.1	0.85	11.3	2.6	2.3	M	1560	3.7019	155	342	FD 09	300	2655	—	440	1760	4.1765	195	430	•	•
22	30	<b>BX 180L</b>	4	1475	142	1261	38.2	93.0	93.6	92.8	0.88	10.2	2.5	2.0	L	1660	3.9392	163	359	FD 09	300	2655	—	250	1860	4.4138	203	448	•	•

Note: for more details on the available energy certifications look at the catalog's dedicated section.





4 P		1500 min <sup>-1</sup> - S1															50 Hz										
		d.c. brake																									
P <sub>n</sub>	kW	hp	n	M <sub>n</sub>	In	η%	cos φ	I <sub>s</sub>	I <sub>h</sub>	M <sub>s</sub>	M <sub>n</sub>	KVA	J <sub>m</sub>	IM B5	Mod	M <sub>b</sub>	J <sub>m</sub>	IM B5	Standard	BIS variant	CEL variant						
																						Nm	A	100%	75%	50%	kgm <sup>2</sup>
30	40	BX 200LAK	4	1483	193	55.7	94.7	95.1	95.0	8.3	3.0	3.3	N/A	0.37	0.0009	319	703	FD 8	400	3540	0.39	0.0009	337	743	•	•	•
37	50	BX 225SAK	4	1482	238	65.9	95.1	95.5	95.4	7.7	2.8	3.1	N/A	0.54	0.0013	398	877	FD 9	600	5310	0.57	0.0014	426	939	•	•	•
45	60	BX 225SBK	4	1481	290	80.4	95.2	95.6	95.6	7.9	2.8	3.2	N/A	0.54	0.0013	398	877	FD 9	600	5310	0.57	0.0014	426	939	•	•	•
55	74	BX 250MAK	4	1485	354	98.9	95.6	95.8	95.5	7.9	3.0	3.3	N/A	0.93	0.0022	476	1049	FD 10	800	7080	1.01	0.0024	521	1149	•	•	•
75	101	BX 280SAK	4	1487	482	134.0	95.9	96.2	96.1	7.3	2.5	2.8	N/A	1.50	0.0036	665	1466	FD 100	1000	8850	1.54	0.0036	771	1700	•	•	•
90	121	BX 280SBK	4	1487	578	161.0	96.2	96.4	96.1	7.9	2.9	3.0	N/A	1.85	0.0044	725	1598	FD 100	1000	8850	1.89	0.0045	831	1832	•	•	•
110	148	BX 315SAK	4	1491	704	194.0	96.8	97.0	96.7	8.3	2.4	3.1	N/A	2.90	0.0069	1000	2205	FD 100	1000	8850	2.94	0.0070	1106	2438	•	•	•
132	177	BX 315SBK	4	1490	846	234.0	96.9	97.1	96.8	8.1	2.6	3.2	N/A	3.20	0.0076	1065	2348	FD 160	1600	14160	3.25	0.0077	1233	2718	•	•	•
160	215	BX 315SCK	4	1490	1025	279.0	96.7	96.9	96.6	8.2	2.7	3.0	N/A	3.90	0.0093	1220	2690	FD 160	1600	14160	3.95	0.0094	1388	3060	•	•	•
200	268	BX 355SAK	4	1491	1281	345.0	96.6	96.7	96.4	7.3	2.1	2.7	N/A	5.90	0.0140	1610	3549	FD 250	2500	22125	5.95	0.0141	1778	3920	•	•	•
250	335	BX 355MAK	4	1491	1601	435.0	96.0	96.0	95.6	6.4	2.1	2.9	N/A	6.90	0.0164	1780	3924	FD 250	2500	22125	6.95	0.0165	1948	4295	•	•	•
315	422	BX 355MBK	4	1491	2017	550.0	96.0	96.1	95.7	7.3	2.4	3.3	N/A	7.20	0.0171	1820	4012	FD 250	2500	22125	7.25	0.0172	1988	4383	•	•	•
355	476	BX 355MCK	4	1490	2275	616.0	96.0	96.2	95.8	6.3	2.3	2.8	N/A	8.40	0.0199	2140	4718	FD 250	2500	22125	8.45	0.0201	2308	5088	•	•	•




4 P		1800 min <sup>-1</sup> - S1																60 Hz												
		d.c. brake																												
		FD																												
P <sub>n</sub> kW	hp		n min <sup>-1</sup>	M <sub>n</sub>		In 460V A	η%		cos φ	I <sub>s</sub> I <sub>n</sub>	M <sub>s</sub> M <sub>n</sub>	M <sub>a</sub> M <sub>n</sub>	KVA code	J <sub>m</sub> x 10 <sup>-4</sup>		IM B5		Mod	M <sub>b</sub>		Z <sub>0</sub> 1/h		J <sub>m</sub> x 10 <sup>-4</sup>		IM B5		Standard	CE + UL		
				Nm	lb-in		100%	75%						kgm <sup>2</sup>	lb-ft <sup>2</sup>	kg	lbs		Nm	lb-in	NB	SB	kgm <sup>2</sup>	lb-ft <sup>2</sup>	kg	lbs			kgm <sup>2</sup>	lb-ft <sup>2</sup>
0.12	0.16	<b>BX 63A</b>	4	1700	0.7	5.9	0.49	66.0	63.1	56.0	0.50	4.1	3.8	2.7	L	1.82	0.004321032	3.2	7.0	<b>FD 02</b>	1.75	15	8900	11000	2.4	0.0057	4.9	11	•	•
0.18	0.25	<b>BX 63B</b>	4	1695	1.0	9.0	0.52	69.5	69.5	67.9	0.57	4.3	3.2	3.0	J	2.9	0.0069	5.1	11	<b>FD 02</b>	3.5	31	7000	9000	3.5	0.0083	6.8	12	•	•
0.25	0.33	<b>BX 63C</b>	4	1710	1.4	12.4	0.71	73.4	73.6	67.7	0.58	4.8	3.8	3.1	K	4.3	0.0102	5.4	12	<b>FD 02</b>	3.5	31	5800	7700	4.9	0.0116	7.0	16	•	•
0.25	0.33	<b>BX 71A</b>	4	1715	1.4	12.4	0.55	73.4	76.1	71.5	0.71	5.2	2.8	2.1	G	6.3	0.0150	5.5	13	<b>FD 03</b>	3.5	31	5700	8100	8.4	0.0190	8.4	19	•	•
0.37	0.55	<b>BX 71B</b>	4	1735	2.0	17.7	0.9	78.2	79.2	75.1	0.66	6.9	4.1	3.7	M	10	0.0230	7.3	16	<b>FD 03</b>	5	44	4800	6800	11.8	0.0280	10	22	•	•
0.55	0.75	<b>BX 80A</b>	4	1730	3.0	26.5	1.11	81.1	78.3	74	0.78	7.7	4.3	3.4	L	28	0.0664	12.2	26.9	<b>FD 04</b>	15	133	2000	3900	29.6	0.0702	16	36	•	•
0.75	1	<b>BX 80B</b>	4	1740	4.1	36	1.43	85.5	85.8	84.2	0.78	7.3	2.4	2.2	L	35	0.0831	16	35	<b>FD 04</b>	15	133	1400	2800	37	0.0878	20	44	•	•
0.75	1	<b>BX 90SR</b>	4	1755	4.1	36	1.48	85.5	86.4	83.9	0.73	8.0	3.7	2.5	L	27	0.0641	16	35	<b>FD 14</b>	15	133	1800	3700	29	0.0688	20	44	•	•
1.1	1.5	<b>BX 90S</b>	4	1740	6.0	53	2.15	86.5	85.9	83.0	0.74	8.2	4.1	2.8	K	27	0.0641	16	35	<b>FD 14</b>	15	133	2400	5500	29	0.0688	20	44	•	•
1.5	2	<b>BX 90LA</b>	4	1735	8.3	73	2.91	86.5	86.5	84.4	0.75	7.4	3.6	2.5	K	31	0.0736	17	37	<b>FD 05</b>	26	230	1700	3600	35	0.0831	23	51	•	•
2.2	3	<b>BX 100LA</b>	4	1760	11.9	106	4.4	89.5	88.6	86.2	0.71	9.9	4.8	3.6	N	73	0.1732	29	64	<b>FD 15</b>	40	354	470	1300	77	0.1827	36	79	•	•
3	4	<b>BX 100LB</b>	4	1750	16.4	145	5.9	89.5	88.9	86.7	0.71	9.1	4.4	3.3	M	73	0.1732	29	64	<b>FD 15</b>	40	354	640	1700	77	0.1827	36	79	•	•
3.7	5	<b>BX 112M</b>	4	1760	20.0	178	6.7	89.5	89.5	89.1	0.77	10.4	4.7	3.4	M	130	0.3085	38	84	<b>FD 06S</b>	60	531	—	790	139	0.3299	48	106	•	•
5.5	7.5	<b>BX 132SB</b>	4	1770	30.0	263	9.9	91.7	92.0	90.2	0.76	10.7	5.1	4.6	N	410	0.9729	77	170	<b>FD 56</b>	75	664	—	130	420	0.9967	90	198	•	•
7.5	10	<b>BX 132MA</b>	4	1770	41.0	358	13.4	91.7	91.3	89.7	0.76	11.0	4.9	4.4	N	410	0.9729	77	170	<b>FD 06</b>	100	885	—	230	420	0.9967	90	198	•	•
9.2	12.5	<b>BX 160MA</b>	4	1770	50.0	439	15.6	92.4	92.5	91.6	0.80	9.1	4.1	2.6	L	650	1.5425	95	209	<b>FD 08</b>	170	1505	—	280	725	1.7205	125	276	•	•
11	15	<b>BX 160MB</b>	4	1770	59.0	525	18.2	92.4	92.9	92.0	0.82	9.3	4.0	2.4	L	780	1.8509	110	243	<b>FD 08</b>	170	1505	—	230	855	2.0289	140	309	•	•
15	20	<b>BX 160L</b>	4	1770	81.0	716	24.5	93.0	93.5	92.5	0.81	10.9	4.8	2.8	M	890	2.1120	121	267	<b>FD 08</b>	200	1770	—	240	965	2.2900	151	333	•	•
18.5	25	<b>BX 180M</b>	4	1780	99.0	878	28.6	93.6	94.5	93.2	0.85	13.0	2.9	2.7	N	1560	3.7019	155	342	<b>FD 09</b>	300	2655	—	130	1760	4.1765	195	430	•	•
22	30	<b>BX 180L</b>	4	1775	118.0	1045	33.1	93.6	94.2	93.1	0.87	11.5	2.8	2.4	M	1660	3.9392	163	359	<b>FD 09</b>	300	2655	—	130	1860	4.4138	203	448	•	•


Note: for more details on the available energy certifications look at the catalog's dedicated section.  
 Sizes 100LA and 100LB are only available with UL for USA and not for Canada




4 P		1800 min <sup>-1</sup> - S1																60 Hz											
		d.c. brake																											
		FD																											
P <sub>n</sub>	kW	hp		n	M <sub>n</sub>	In	η%		cos φ	I <sub>s</sub>	I <sub>n</sub>	M <sub>s</sub>	M <sub>n</sub>	M <sub>a</sub>	M <sub>n</sub>	KVA	J <sub>m</sub>		IM B5		Mod	M <sub>b</sub>		J <sub>m</sub>		IM B5		CE + UL variant	CE + METRO variant
							100%	75%									kgm <sup>2</sup>	lb-ft <sup>2</sup>	kg	lbs		Nm	lb-in	kgm <sup>2</sup>	lb-ft <sup>2</sup>	kg	lbs		
30	40	BX 200LAK	4	1786	160	47.9	94.7	94.8	0.83	9.4	3.3	3.7	N/A	0.37	0.0009	319	703	FD 8	400	3540	0.39	0.0009	337	743	•	•			
37	50	BX 225SAK	4	1784	198	57.3	95.3	95.5	0.85	8.8	2.9	3.4	N/A	0.54	0.0013	398	877	FD 9	600	5310	0.57	0.0014	426	939	•	•			
45	60	BX 225SBK	4	1785	240	70.5	95.3	95.4	0.84	8.9	3.0	3.6	N/A	0.54	0.0013	398	877	FD 9	600	5310	0.57	0.0014	426	939	•	•			
55	74	BX 250MAK	4	1787	293	85.8	95.7	95.8	0.84	9.1	3.3	3.7	N/A	0.93	0.0022	476	1049	FD10	800	7080	1.01	0.0024	521	1149	•	•			
75	101	BX 280SAK	4	1788	401	117.0	95.9	95.7	0.84	8.4	2.7	3.1	N/A	1.50	0.0036	665	1466	FD 100	1000	8850	1.54	0.0036	771	1700	•	•			
90	121	BX 280SBK	4	1788	481	140.0	96.1	95.9	0.84	9.0	3.1	3.3	N/A	1.85	0.0044	725	1598	FD 100	1000	8850	1.89	0.0045	831	1832	•	•			
110	148	BX 315SAK	4	1792	586	172.0	96.1	96.0	0.84	8.8	2.6	3.4	N/A	2.90	0.0069	1000	2205	FD 100	1000	8850	2.94	0.0070	1106	2438	•	•			
132	177	BX 315SBK	4	1791	704	206.0	96.4	96.3	0.84	9.0	2.8	3.6	N/A	3.20	0.0076	1065	2348	FD 160	1600	14160	3.25	0.0077	1233	2718	•	•			
160	215	BX 315SCK	4	1791	853	241.0	96.4	96.4	0.86	9.0	2.9	3.3	N/A	3.90	0.0093	1220	2690	FD 160	1600	14160	3.95	0.0094	1388	3060	•	•			
200	268	BX 355SAK	4	1792	1065	301.0	96.4	96.2	0.87	8.3	2.2	3.0	N/A	5.90	0.0140	1610	3549	FD 250	2500	22125	5.95	0.0141	1778	3920	•	•			
250	335	BX 355MAK	4	1792	1332	381.0	96.7	96.6	0.86	8.8	2.7	3.2	N/A	6.90	0.0164	1780	3924	FD 250	2500	22125	6.95	0.0165	1948	4295	•	•			
315	422	BX 355MBK	4	1791	1679	479.0	96.7	96.6	0.85	8.5	3.1	3.2	N/A	7.20	0.0171	1820	4012	FD 250	2500	22125	7.25	0.0172	1988	4383	•	•			
355	476	BX 355MCK	4	1792	1893	541.0	96.7	96.5	0.86	7.2	2.4	3.1	N/A	8.40	0.0199	2140	4718	FD 250	2500	22125	8.45	0.0201	2308	5088	•	•			


Note: for more details on the available energy certifications look at the catalog's dedicated section.




4 P		1500 min <sup>-1</sup> - S1												50 Hz															
d.c. brake																													
FD																													
P <sub>n</sub> kW	P <sub>n</sub> hp		n min <sup>-1</sup>	M <sub>n</sub> Nm	M <sub>n</sub> lb-in	In 400V A	η%		cos φ	I <sub>s</sub> I <sub>n</sub>	M <sub>s</sub> M <sub>n</sub>	M <sub>a</sub> M <sub>n</sub>	KVA code	J <sub>m</sub> x 10 <sup>-4</sup>		IM B5		Mod	M <sub>b</sub>		Z <sub>0</sub> 1/h		J <sub>m</sub> x 10 <sup>-4</sup>		IM B5		CE + BIS	CE + CEL	
							100%	75%						kgm <sup>2</sup>	lb-ft <sup>2</sup>	kg	lbs		Nm	lb-in	NB	SB	kgm <sup>2</sup>	lb-ft <sup>2</sup>	kg	lbs			kgm <sup>2</sup>
0.12	0.16	<b>MX 05A</b>	4	1365	0.8	7.4	0.45	64.8	60	52.9	0.64	2.9	1.7	G	1.8	0.0043	3.2	7	<b>FD 02</b>	1.75	15	8900	11000	2.4	0.0057	4.9	11	•	•
0.18	0.25	<b>MX 05B</b>	4	1370	1.3	11.1	0.57	69.9	69.5	65.9	0.63	3.6	1.8	G	2.9	0.0069	5.1	11	<b>FD 02</b>	3.5	31	7000	9000	3.5	0.0083	6.8	15	•	•
0.25	0.33	<b>MX 1SA</b>	4	1400	1.7	15.5	0.63	73.5	76.0	72.6	0.77	4.3	2.3	G	6.3	0.0150	5.4	12	<b>FD 03</b>	3.5	31	5400	7800	8.4	0.0190	8.1	18	•	•
0.37	0.5	<b>MX 1SB</b>	4	1420	2.5	22.0	1.0	77.3	78.1	73.8	0.71	5.9	3.1	J	10	0.0230	6.9	15	<b>FD 03</b>	5	44	7000	10000	11.8	0.0280	10	22	•	•
0.55	0.75	<b>MX 2SA</b>	4	1425	3.7	33	1.2	80.8	78.6	75.2	0.81	6.8	3.5	J	28	0.0664	12.2	27	<b>FD 04</b>	15	133	2400	4700	29.6	0.0702	16	36	•	•
0.75	1	<b>MX 2SB</b>	4	1425	5.0	45	1.61	82.5	83.9	83.2	0.81	6.5	2.0	J	35	0.0831	16	35	<b>FD 04</b>	15	132	1700	3300	37	0.0878	20	44	•	•
1.1	1.5	<b>MX 3SA</b>	4	1445	7.3	64	2.46	84.1	85.5	83.5	0.75	6.7	3.0	J	35	0.0831	17	37	<b>FD 15</b>	26	132	3700	6200	39	0.0925	24	53	•	•
1.5	2	<b>MX 3SB</b>	4	1445	9.9	88	3.3	85.3	86.8	85.4	0.75	6.7	3.1	J	43	0.1020	20	44	<b>FD 15</b>	26	230	2400	4300	47	0.1115	27	60	•	•
2.2	3	<b>MX 3LA</b>	4	1445	14.5	129	5.1	86.7	86.2	84.0	0.72	7.2	3.6	K	58	0.1376	24	53	<b>FD 15</b>	40	354	1500	2800	62	0.1471	31	68	•	•
3	4	<b>MX 3LB</b>	4	1445	19.8	175	6.7	87.7	87.7	86.0	0.74	7.6	3.9	K	73	0.1732	29	64	<b>FD 15</b>	40	354	1500	2700	77	0.1827	36	79	•	•
3.7	5	<b>MX 4SA</b>	4	1450	24.4	216	7.5	88.4	90.0	88.8	0.80	8.4	3.9	L	225	0.5339	45	99	<b>FD 55</b>	74	354	—	1100	235	0.5577	57	126	•	•
4	5.4	<b>MX 4SA</b>	4	1460	26.0	232	7.8	88.6	89.9	88.7	0.82	8.1	3.7	J	225	0.5339	45	99	<b>FD 56</b>	75	663	—	1100	235	0.5577	58	128	•	•
5.5	7.5	<b>MX 4SB</b>	4	1460	36.0	318	10.6	89.6	89.9	88.8	0.83	8.2	3.6	J	310	0.7356	57	126	<b>FD 56</b>	75	663	—	700	320	0.7594	70	154	•	•
7.5	10	<b>MX 4LA</b>	4	1460	49.0	434	15.0	90.4	90.9	90.2	0.80	8.4	3.8	K	360	0.8543	67	148	<b>FD 06</b>	100	885	—	700	370	0.8780	80	176	•	•
9.2	12.5	<b>MX 5SA</b>	4	1465	60.0	531	17.8	91.0	92.1	91.7	0.82	7.9	3.6	J	650	1.5425	95	209	<b>FD 08</b>	170	1505	—	620	725	1.7205	125	276	•	•
11	15	<b>MX 5SB</b>	4	1465	72.0	635	20.5	91.4	92.9	92.5	0.84	7.8	3.4	J	780	1.8509	110	243	<b>FD 08</b>	170	1505	—	470	855	2.0289	140	309	•	•
15	20	<b>MX 5LA</b>	4	1465	98.0	865	28.1	92.1	93.2	92.6	0.82	9.0	4.1	K	890	2.1120	121	267	<b>FD 08</b>	200	1770	—	510	965	2.2900	151	333	•	•




<b>4 P</b>	<b>1800 min<sup>-1</sup> - S1</b>										<b>60 HZ</b>
	d.c. brake										

P <sub>n</sub>	kW	hp		n	M <sub>n</sub>	In	η%		cos φ	I <sub>s</sub>	M <sub>s</sub>	M <sub>s</sub>	M <sub>a</sub>	KVA	J <sub>m</sub>	IM B5	Mod	M <sub>b</sub>		Z <sub>0</sub>		J <sub>m</sub>	IM B5		Standard	CUS variant				
							100%	75%										50%	Nm	lb-in	NB		SB	kgm <sup>2</sup>			lb-ft <sup>2</sup>	kg	lbs	CE
0.12	0.16	<b>MX 05A</b>	4	1700	0.7	5.9	0.49	66.0	63.1	56.0	4.1	3.8	2.7	L	1.82	0.0043	2.9	6.38	<b>FD 02</b>	1.75	15	8900	11000	2.4	0.005695	135	4.6	10	•	•
0.18	0.25	<b>MX 05B</b>	4	1695	1.0	9.0	0.52	69.5	69.5	67.9	4.3	3.2	3.0	J	2.9	0.0069	4.8	11	<b>FD 02</b>	3.5	31	7000	9000	3.5	0.0083	7	7	12	•	•
0.25	0.33	<b>MX 1SA</b>	4	1715	1.4	12.4	0.55	73.4	76.1	71.5	5.2	2.6	2.8	G	6.3	0.0150	5.4	12	<b>FD 03</b>	3.5	31	5700	8100	8.4	0.0190	8.1	8.1	18	•	•
0.37	0.5	<b>MX 1SB</b>	4	1735	2.0	17.7	0.9	78.2	79.2	75.1	6.9	4.1	3.7	M	10	0.0230	6.9	15	<b>FD 03</b>	5	44	4800	6800	11.8	0.0280	10	22	22	•	•
0.55	0.75	<b>MX 2SA</b>	4	1730	3.0	26.5	1.11	81.1	78.3	74	7.7	4.3	3.4	L	28	0.0664	12.2	26.9	<b>FD 04</b>	15	133	2000	3900	29.6	0.0702	16.1	36	36	•	•
0.75	1	<b>MX 2SB</b>	4	1740	4.1	36	1.43	85.5	85.8	84.2	7.3	2.4	2.2	L	35	0.0831	16	35	<b>FD 04</b>	15	133	1400	2800	37	0.0878	20	44	44	•	•
0.75	1	<b>MX 2SB</b>	4	1755	4.1	36	1.48	85.5	86.4	83.9	8.0	3.7	2.5	L	27	0.0641	16	35	<b>FD 14</b>	15	132	1800	3700	29	0.0688	20	45	45	•	•
1.1	1.5	<b>MX 3SA</b>	4	1755	6.0	53	2.19	86.5	86.0	83.0	7.9	3.3	2.5	L	35	0.0831	17	37	<b>FD 15</b>	26	133	800	2200	39	0.0925	24	53	53	•	•
1.5	2	<b>MX 3SB</b>	4	1755	8.2	72	2.96	86.5	87.2	85.0	8.5	3.7	2.9	L	43	0.1020	20	44	<b>FD 15</b>	26	230	750	2000	47	0.1115	27	60	60	•	•
2.2	3	<b>MX 3LA</b>	4	1760	11.9	106	4.4	89.5	88.6	86.2	9.9	4.8	3.6	N	73	0.1732	29	64	<b>FD 15</b>	40	354	470	1300	77	0.1827	36	79	79	•	•
3	4	<b>MX 3LB</b>	4	1750	16.4	145	5.9	89.5	88.9	86.7	9.1	4.4	3.3	M	73	0.1732	29	64	<b>FD 15</b>	40	354	640	1700	77	0.1827	36	79	79	•	•
3.7	5	<b>MX 4SA</b>	4	1770	20.0	177	6.6	89.5	89.8	87.7	9.9	4.7	3.4	M	225	0.5339	45	99	<b>FD 56</b>	75	664	—	465	235	0.5577	58	128	128	•	•
5.5	7.5	<b>MX 4SB</b>	4	1770	30.0	263	9.9	91.7	92.0	90.2	10.7	5.1	4.6	N	410	0.9729	77	170	<b>FD 56</b>	75	664	—	130	420	0.9967	90	198	198	•	•
7.5	10	<b>MX 4LA</b>	4	1770	41.0	358	13.4	91.7	91.3	89.7	11.0	4.9	4.4	N	410	0.9729	77	170	<b>FD 06</b>	100	885	—	230	420	0.9967	90	198	198	•	•
9.2	12.5	<b>MX 5SA</b>	4	1770	50.0	439	15.6	92.4	92.5	91.6	9.1	4.1	2.6	L	650	1.5425	95	209	<b>FD 08</b>	170	1505	—	280	725	1.7205	125	276	276	•	•
11	15	<b>MX 5SB</b>	4	1770	59.0	525	18.2	92.4	92.9	92.0	9.3	4.0	2.4	L	780	1.8509	110	243	<b>FD 08</b>	170	1505	—	230	855	2.0289	140	309	309	•	•
15	20	<b>MX 5LA</b>	4	1770	81.0	716	24.5	93.0	93.5	92.5	10.9	4.8	2.8	M	890	2.1120	121	267	<b>FD 08</b>	200	1770	—	240	965	2.2900	151	333	333	•	•






# BX - IM B5

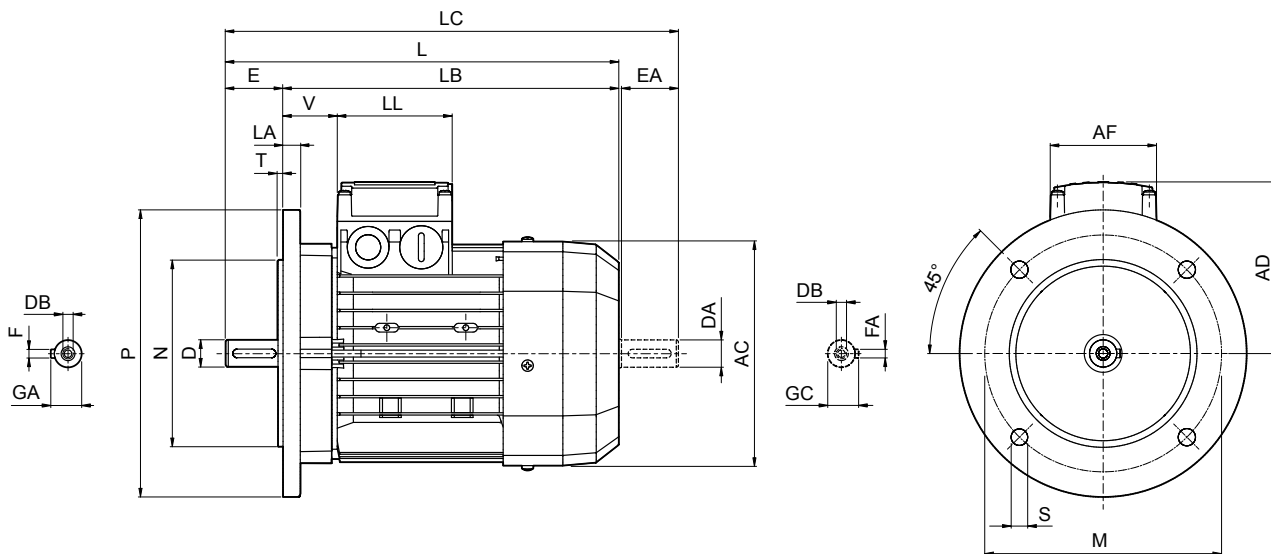

**BX-IE3**


	Shaft					Flange						Motor								
	D DA	E EA	DB	GA GC	F FA	M	N	P	S	T	LA	AC	L	LB	LC	AD	AF	LL	V	
<b>BX 63A</b>	11 9 <sup>(1)</sup>	23 20 <sup>(1)</sup>	M4	12.5	4	115	95	140	9.5	3	10	121	206	183	228	95	74	80	26	
<b>BX 63B</b>			M3 <sup>(1)</sup>	10.2 <sup>(1)</sup>	3 <sup>(1)</sup>								226	203	248					
<b>BX 63C</b>																				
<b>BX 71A</b>	14 11 <sup>(1)</sup>	30 23 <sup>(1)</sup>	M5	16	5	130	110	160	11.5	3.5	11.5	138	249	219	274	108	74	80	37	
<b>BX 71B</b>			M4 <sup>(1)</sup>	12.5 <sup>(1)</sup>	4 <sup>(1)</sup>								274	234	306					
<b>BX 80A</b>	19 14 <sup>(1)</sup>	40 30 <sup>(1)</sup>	M6	21.5	6	165	130	200	11.5	3.5	11.5	156	274	234	306	119	74	80	38	
<b>BX 80 B</b>			M5 <sup>(1)</sup>	16 <sup>(1)</sup>	5 <sup>(1)</sup>								320	280	351					
<b>BX 90 S</b>	24 19 <sup>(1)</sup>	50 40 <sup>(1)</sup>	M8	27	8	215	180	250	14	4	14	176	326	276	368	133	98	98	44	
<b>BX 90 LA</b>			M6 <sup>(1)</sup>	21.5 <sup>(1)</sup>	6 <sup>(1)</sup>								326	276	368					
<b>BX 100 LA</b>	28 24 <sup>(1)</sup>	60 50 <sup>(1)</sup>	M10	31	8	215	180	250	14	4	14	195	410	350	462	142	98	98	50	
<b>BX 100 LB</b>			M8 <sup>(1)</sup>	27 <sup>(1)</sup>	8 <sup>(1)</sup>								410	350	462					
<b>BX 112 M</b>													410	350	462					
<b>BX 132 SB</b>	38 28 <sup>(1)</sup>	80 60 <sup>(1)</sup>	M12	41	10	265	230	300	14	4	15	219	430	370	482	157	118	118	58	
<b>BX 132 MA</b>			M10 <sup>(1)</sup>	31 <sup>(1)</sup>	8 <sup>(1)</sup>								493	413	556					
<b>BX 160 MA</b>	42 38 <sup>(1)</sup>	110 80 <sup>(1)</sup>	M16	45	12	300	250	350	18.5	5	15	310	596	486	680	245	187	187	51	
<b>BX 160 MB</b>			M12 <sup>(1)</sup>	41 <sup>(1)</sup>	10 <sup>(1)</sup>								640	530	724					
<b>BX 160 L</b>													640	530	724					
<b>BX 180 M</b>	48 42 <sup>(1)</sup>	110 110 <sup>(1)</sup>	M16	51.5	14	350	300	400	19	5	18	348	708	598	823	261	187	187	52	
<b>BX 180 L</b>			M16 <sup>(1)</sup>	45 <sup>(1)</sup>	12 <sup>(1)</sup>								708	598	823					
<b>BX 200LAK</b>	55 45 <sup>(1)</sup>	140 110 <sup>(1)</sup>	M20 M20 <sup>(1)</sup>	59	16	500	450	550	19	5	20	423	821	711	934	328	300	311	48	
<b>BX 225SAK</b>	60			64	18								400	350	450					19
<b>BX 225SBK</b>	55 <sup>(1)</sup>			59 <sup>(1)</sup>	16 <sup>(1)</sup>								400	350	450					19
<b>BX 250MAK</b>	65			69	18								500	450	550					18
<b>BX 280SAK</b>	75			79.5	20								600	550	660					18
<b>BX 280SBK</b>	65 <sup>(1)</sup>			69 <sup>(1)</sup>	18 <sup>(1)</sup>								600	550	660					18
<b>BX 315SAK</b>	80			85	22								600	550	660					18
<b>BX 315SBK</b>	75 <sup>(1)</sup>			79.5 <sup>(1)</sup>	20 <sup>(1)</sup>								600	550	660					18
<b>BX 315SCK</b>				600	550	660	18													
<b>BX 355SAK</b>	100 75 <sup>(1)</sup>	210 170 <sup>(1)</sup>	M24 M20 <sup>(1)</sup>	106 79.5 <sup>(1)</sup>	28 20 <sup>(1)</sup>	740	680	800	23	6	25	645	1204	1034	1352	537	473	347	42	
<b>BX 355MAK</b>													1315	1145	1453					
<b>BX 355MBK</b>													1479	1269	1659					
<b>BX 355MCK</b>													1584	1374	1764					

N.B.: 1) These values refer to the rear shaft end (PS).  
 CEL certification on BX is available from size 100LA to 355MCK




# BX - IM B14

**BX-IE3**

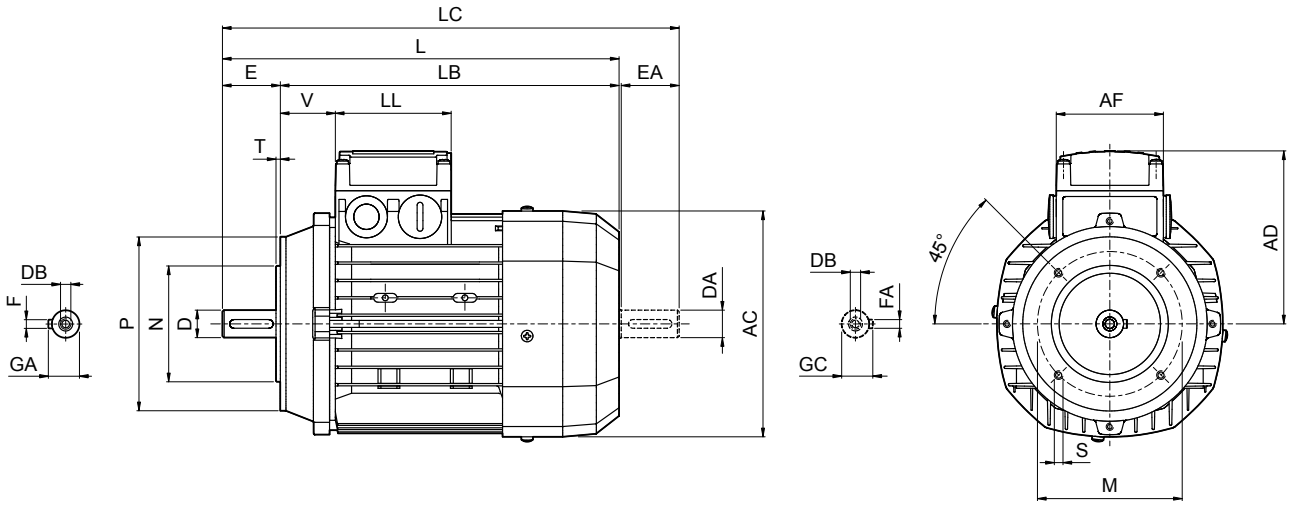


	Shaft					Housing					Motor							
	D DA	E EA	DB	GA GC	F FA	M	N	P	S	T	AC	L	LB	LC	AD	AF	LL	V
<b>BX 63A</b>	11 9 <sup>(1)</sup>	23 20 <sup>(1)</sup>	M4 M3 <sup>(1)</sup>	12.5 10.2 <sup>(1)</sup>	4 3 <sup>(1)</sup>	75	60	90	M5	2.5	121	206	183	228	95	74	80	26
<b>BX 63B</b>												226	203	248				
<b>BX 63C</b>												249	219	274				
<b>BX 71A</b>	14 11 <sup>(1)</sup>	30 23 <sup>(1)</sup>	M5 M4 <sup>(1)</sup>	16 12.5 <sup>(1)</sup>	5 4 <sup>(1)</sup>	85	70	105	M6	3	156	274	234	306	119	98	98	37
<b>BX 71B</b>												320	280	351				
<b>BX 80A</b>	19 14 <sup>(1)</sup>	40 30 <sup>(1)</sup>	M6 M5 <sup>(1)</sup>	21.5 16 <sup>(1)</sup>	6 5 <sup>(1)</sup>	100	80	120	M8	3	176	276	276	368	133	98	98	38
<b>BX 80 B</b>												326	276	368				
<b>BX 90 S</b>	24 19 <sup>(1)</sup>	50 40 <sup>(1)</sup>	M8 M6 <sup>(1)</sup>	27 21.5 <sup>(1)</sup>	8 6 <sup>(1)</sup>	115	95	140	M8	3.5	195	326	276	368	133	98	98	44
<b>BX 90 LA</b>												410	350	462				
<b>BX 100 LA</b>	28 24 <sup>(1)</sup>	60 50 <sup>(1)</sup>	M10 M8 <sup>(1)</sup>	31 27 <sup>(1)</sup>	8 8 <sup>(1)</sup>	130	110	160	M10	4	258	430	370	482	157	118	118	52
<b>BX 100 LB</b>												493	413	556				
<b>BX 112 M</b>												528	448	591				
<b>BX 132 SB</b>	38 28 <sup>(1)</sup>	80 60 <sup>(1)</sup>	M12 M10 <sup>(1)</sup>	41 31 <sup>(1)</sup>	10 8 <sup>(1)</sup>	165	130	200	M10	4	258	493	413	556	193	118	118	58
<b>BX 132 MA</b>												528	448	591				

N.B.: 1) These values refer to the rear shaft end (PS).




# BX - IM B3 - FD

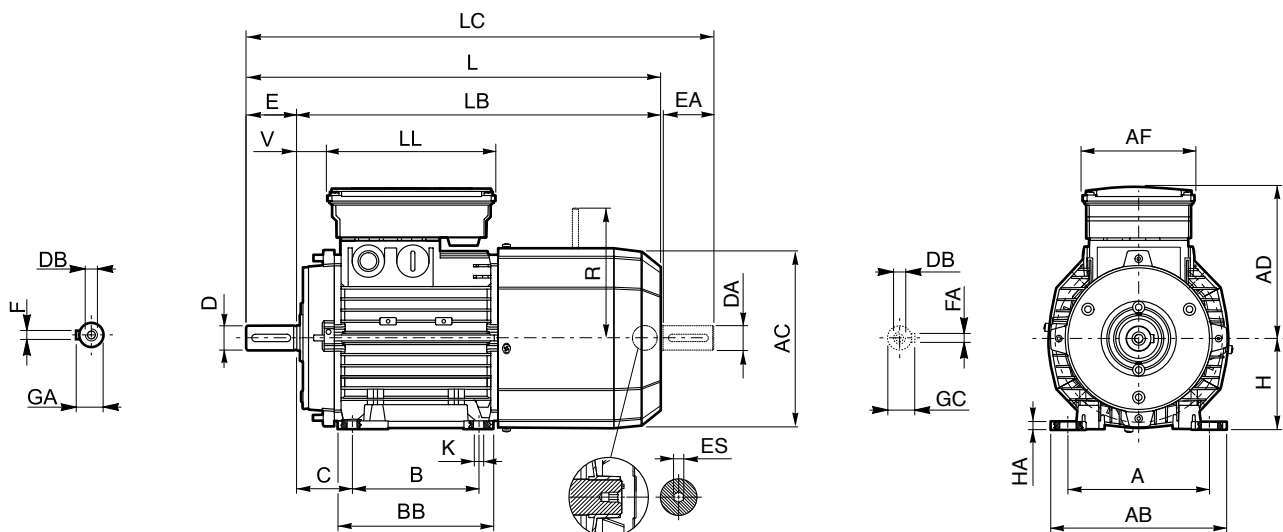

	Shaft					Housing						Motor											
	D DA	E EA	DB	GA GC	F FA	B	A	HA	BB	AB	K	C	H	AC	L	LB	LC	AD	AF	LL	V	R FD	ES <sup>(2)</sup>
<b>BX 63A</b>	11 9 <sup>(1)</sup>	23 20 <sup>(1)</sup>	M4	12.5	4	80	100		96	120	7	40	63	121	272	249	294	122	98	133	14	96	5
<b>BX 63B</b>			M3 <sup>(1)</sup>	10.2 <sup>(1)</sup>	3 <sup>(1)</sup>																		
<b>BX 63C</b>																							
<b>BX 71A</b>	14 11 <sup>(1)</sup>	30 23 <sup>(1)</sup>	M5	16	5	90	112	8	112	135	10	45	71	138	313	283	338	135	98	133	24	103	5
<b>BX 71B</b>			M4 <sup>(1)</sup>	12.5 <sup>(1)</sup>	4 <sup>(1)</sup>																		
<b>BX 80A</b>	19 14 <sup>(1)</sup>	40 30 <sup>(1)</sup>	M6	21.5	6	100	125		124	153	10	50	80	156	346	306	378	143	98	133	25	129	5
<b>BX 80 B</b>			M5 <sup>(1)</sup>	16 <sup>(1)</sup>	5 <sup>(1)</sup>										392	352	423						
<b>BX 90 S</b>	24 19 <sup>(1)</sup>	50 40 <sup>(1)</sup>	M8	27	8	125	140		155	174	10	56	90	176	410	360	452	146	98	133	32	129	5
<b>BX 90 LA</b>			M6 <sup>(1)</sup>	21.5 <sup>(1)</sup>	6 <sup>(1)</sup>																		
<b>BX 100 LA</b>	28 24 <sup>(1)</sup>	60 50 <sup>(1)</sup>	M10	31	8	140	160	10	175	192	12	63	100	195	502	442	554	155	98	133	37	160	6
<b>BX 100 LB</b>			M8 <sup>(1)</sup>	27 <sup>(1)</sup>	8 <sup>(1)</sup>																		
<b>BX 112 M</b>																							
<b>BX 132 SB</b>	38 28 <sup>(1)</sup>	80 60 <sup>(1)</sup>	M12	41	10	178	216	12	218	254	12	89	132	258	603	523	667	210	140	188	46	204	6
<b>BX 132 MA</b>			M10 <sup>(1)</sup>	31 <sup>(1)</sup>	8 <sup>(1)</sup>										627	547	690						
<b>BX 160 MA</b>	42 38 <sup>(1)</sup>	110 80 <sup>(1)</sup>	M16	45	12	254	254	25	264	319	14.5	108	160	310	736	626	820	245	187	187	51	266	6
<b>BX 160 MB</b>			M12 <sup>(1)</sup>	41 <sup>(1)</sup>	10 <sup>(1)</sup>										780	670	864						
<b>BX 160 L</b>																							
<b>BX 180 M</b>	48 42 <sup>(1)</sup>	110 110 <sup>(1)</sup>	M16	51.5	14	279	279	26	291	359	14	121	180	348	866	756	981	261	98	133	52	305	6
<b>BX 180 L</b>			M16 <sup>(1)</sup>	45 <sup>(1)</sup>	12 <sup>(1)</sup>																		
<b>BX 200LAK</b>	55 45 <sup>(1)</sup>	140 110 <sup>(1)</sup>	M20	59	16	267	318		345	378	18.5	133	200	417	967	857	1082	328	98	133	55	275	6
<b>BX 225SAK</b>	60 55 <sup>(1)</sup>		M16 <sup>(1)</sup>	48.5 <sup>(1)</sup>	14 <sup>(1)</sup>																		
<b>BX 225SBK</b>	65 55 <sup>(1)</sup>	140 110 <sup>(1)</sup>	M20	59	18	311	406	23	351	435	18.5	149	225	460	1065	925	1180	348	300	311	48	308	6
<b>BX 250MAK</b>				69 59 <sup>(1)</sup>	16 <sup>(1)</sup>																		
<b>BX 280SAK</b>	75 65 <sup>(1)</sup>	140 140 <sup>(1)</sup>	M20	79.5	20	368	457	31	506	530	24	190	280	564	1284	1144	1379	482	434	306	43	500	6
<b>BX 280SBK</b>				69 <sup>(1)</sup>	18 <sup>(1)</sup>																		
<b>BX 315SAK</b>	80 75 <sup>(1)</sup>	170 140 <sup>(1)</sup>	M20	85	22	406	508	40	558	590	28	216	315	639	1493	1323	1643	537	473	347	42	500	6
<b>BX 315SBK</b>				79.5 <sup>(1)</sup>	20 <sup>(1)</sup>										1530	1360	1680						
<b>BX 315SCK</b>															1604	1434	1791						
<b>BX 355SAK</b>	100 90 <sup>(1)</sup>	210 170 <sup>(1)</sup>	M24	106 95 <sup>(1)</sup>	28 25 <sup>(1)</sup>	500	610	45	722	700	35	254	355	725	1722	1512	1902	603	694	413	50	—	6
<b>BX 355MAK</b>																							
<b>BX 355MBK</b>																							
<b>BX 355MCK</b>																							


N.B.: 1) These values refer to the rear shaft end (PS).

2) "ES" hexagon is not present with PS option




# BX - IM B5 - FD

**BX-IE3**

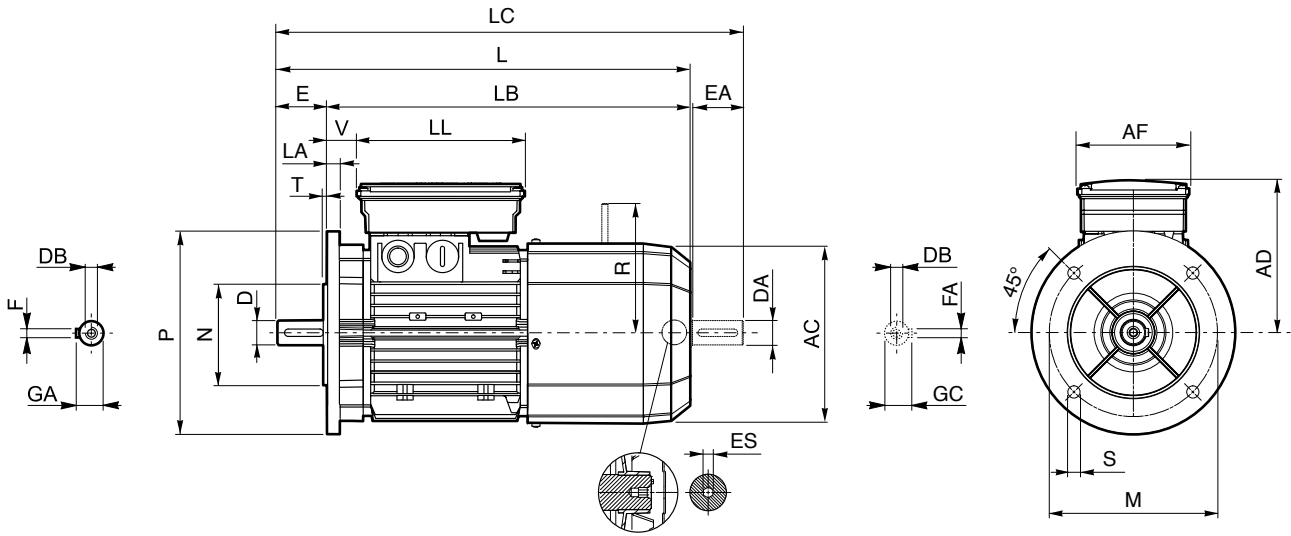


	Shaft					Flange					Motor										
	D DA	E EA	DB	GA GC	F FA	M	N	P	S	T	LA	AC	L	LB	LC	AD	AF	LL	V	R FD	ES <sup>(2)</sup>
BX 63A	11 9 <sup>(1)</sup>	23 20 <sup>(1)</sup>	M4	12.5	4	115	95	140	9.5	3	10	121	272	249	294	122	98	133	14	96	5
BX 63B			M3 <sup>(1)</sup>	10.2 <sup>(1)</sup>	3 <sup>(1)</sup>																
BX 63C			M3 <sup>(1)</sup>	10.2 <sup>(1)</sup>	3 <sup>(1)</sup>																
BX 71A	14 11 <sup>(1)</sup>	30 23 <sup>(1)</sup>	M5	16	5	130	110	160	9.5	3	10	138	313	283	338	135	98	133	24	103	5
BX 71B			M4 <sup>(1)</sup>	12.5 <sup>(1)</sup>	4 <sup>(1)</sup>																
BX 80A	19 14 <sup>(1)</sup>	40 30 <sup>(1)</sup>	M6	21.5	6	165	130	200	11.5	3.5	11.5	156	346	306	378	143	98	133	25	129	5
BX 80 B			M5 <sup>(1)</sup>	16 <sup>(1)</sup>	5 <sup>(1)</sup>								392	352	423						
BX 90 S	24 19 <sup>(1)</sup>	50 40 <sup>(1)</sup>	M8	27	8	165	130	200	11.5	3.5	11.5	176	410	360	452	146	110	165	32	160	6
BX 90 LA			M6 <sup>(1)</sup>	21.5 <sup>(1)</sup>	6 <sup>(1)</sup>																
BX 100 LA	28 24 <sup>(1)</sup>	60 50 <sup>(1)</sup>	M10	31	8	215	180	250	14	4	14	195	502	442	554	155	110	165	37	160	6
BX 100 LB			M8 <sup>(1)</sup>	27 <sup>(1)</sup>	8 <sup>(1)</sup>																
BX 112 M			M10	31	8																
BX 132 SB	38 28 <sup>(1)</sup>	80 60 <sup>(1)</sup>	M12	41	10	265	230	300	14	4	16	258	603	523	667	210	140	188	46	204	6
BX 132 MA			M10 <sup>(1)</sup>	31 <sup>(1)</sup>	8 <sup>(1)</sup>								627	547	690						
BX 160 MA	42 38 <sup>(1)</sup>	110 80 <sup>(1)</sup>	M16	45	12	300	250	350	18.5	5	15	310	736	626	820	245	187	187	51	266	6
BX 160 MB			M12 <sup>(1)</sup>	41 <sup>(1)</sup>	10 <sup>(1)</sup>								780	670	864						
BX 160 L			M12 <sup>(1)</sup>	41 <sup>(1)</sup>	10 <sup>(1)</sup>																
BX 180 M	48 42 <sup>(1)</sup>	110 110 <sup>(1)</sup>	M16	51.5	14	300	250	350	18.5	5	18	348	866	756	981	261	187	187	52	305	6
BX 180 L			M16 <sup>(1)</sup>	45 <sup>(1)</sup>	12 <sup>(1)</sup>																
BX 200LAK	55 45 <sup>(1)</sup>	140 110 <sup>(1)</sup>	M20	59	16	350	300	400	19	5	20	417	967	857	1082	328	300	311	48	308	6
BX 225SAK	60 55 <sup>(1)</sup>		M16 <sup>(1)</sup>	45 <sup>(1)</sup>	12 <sup>(1)</sup>																
BX 225SBK	65 55 <sup>(1)</sup>	140 110 <sup>(1)</sup>	M20	59	16	500	450	550	18	5	24	510	1070	930	1240	376	300	311	48	313	6
BX 250MAK				69 59 <sup>(1)</sup>	M16 <sup>(1)</sup>																
BX 280SAK	75 65 <sup>(1)</sup>	140 140 <sup>(1)</sup>	M20	79.5	20	500	450	550	18	5	23	564	1284	1144	1379	482	434	306	43	500	6
BX 280SBK				69 <sup>(1)</sup>	M20 <sup>(1)</sup>																
BX 315SAK	80 75 <sup>(1)</sup>	170 140 <sup>(1)</sup>	M20	85	22	600	550	660	23	6	25	639	1493	1323	1643	537	473	347	42	500	6
BX 315SBK				79.5 <sup>(1)</sup>	22 <sup>(1)</sup>								1530	1360	1680						
BX 315SCK				79.5 <sup>(1)</sup>	22 <sup>(1)</sup>								1604	1434	1791						
BX 355SAK	100 90 <sup>(1)</sup>	210 170 <sup>(1)</sup>	M24	106 95 <sup>(1)</sup>	28 25 <sup>(1)</sup>	740	680	800	23	6	25	725	1722	1512	1902	603	694	413	50	—	6
BX 355MAK													1722	1512	1902						
BX 355MBK													1722	1512	1902						
BX 355MCK	1827	1617	2082	1827	1617	2082															

N.B.: 1) These values refer to the rear shaft end (PS). 2) "ES" hexagon is not present with PS option  
 CEL certification on BX is available from size 100LA to 355MCK



# BX - IM B14 - FD

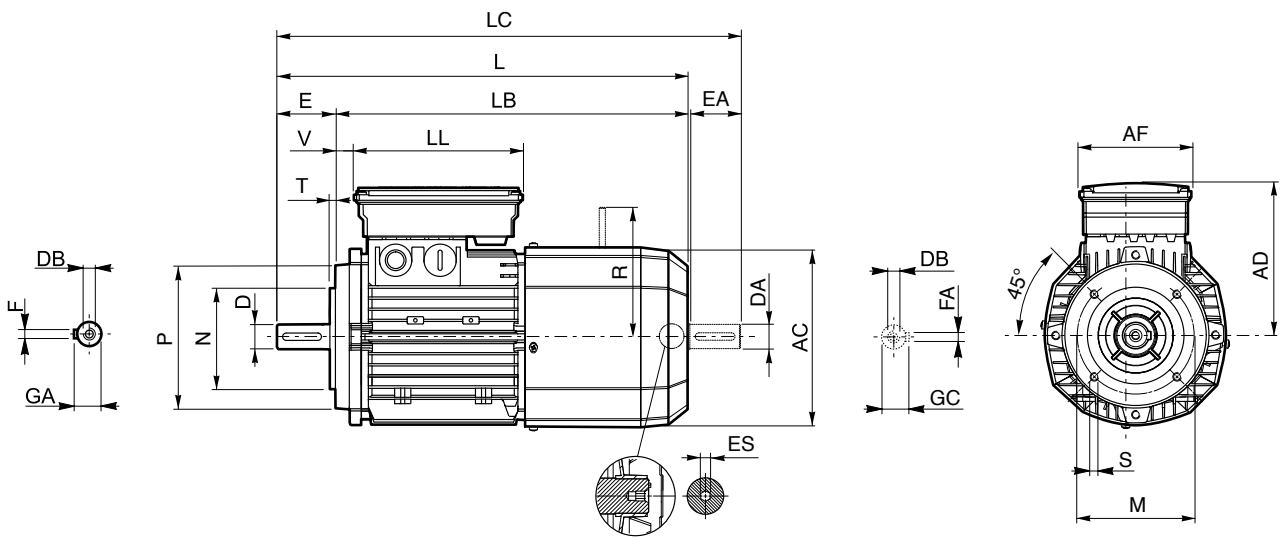


**BX-IE3**

	Shaft					Housing					Motor										
	D DA	E EA	DB	GA GC	F FA	M	N	P	S	T	AC	L	LB	LC	AD	AF	LL	V	R FD	ES (2)	
<b>BX 63A</b>																					
<b>BX 63B</b>	11 9 <sup>(1)</sup>	23 20 <sup>(1)</sup>	M4 M3 <sup>(1)</sup>	12.5 10.2 <sup>(1)</sup>	4 3 <sup>(1)</sup>	75	60	90	M5		121	272	249	294	122			14	96		
<b>BX 63C</b>										2.5											
<b>BX 71A</b>	14 11 <sup>(1)</sup>	30 23 <sup>(1)</sup>	M5 M4 <sup>(1)</sup>	16 12.5 <sup>(1)</sup>	5 4 <sup>(1)</sup>	85	70	105	M6		138	313	283	338	135	98	133	24	103	5	
<b>BX 71B</b>																					
<b>BX 80A</b>	19 14 <sup>(1)</sup>	40 30 <sup>(1)</sup>	M6 M5 <sup>(1)</sup>	21.5 16 <sup>(1)</sup>	6 5 <sup>(1)</sup>	100	80	120			156	392	352	423	143			25	129		
<b>BX 80 B</b>																					
<b>BX 90 S</b>	24 19 <sup>(1)</sup>	50 40 <sup>(1)</sup>	M8 M6 <sup>(1)</sup>	27 21.5 <sup>(1)</sup>	8 6 <sup>(1)</sup>	115	95	140		3	176	410	360	452	146			32			
<b>BX 90 LA</b>																					
<b>BX 100 LA</b>									M8							110	165		160		
<b>BX 100 LB</b>	28 24 <sup>(1)</sup>	60 50 <sup>(1)</sup>	M10 M8 <sup>(1)</sup>	31 27 <sup>(1)</sup>	8 8 <sup>(1)</sup>	130	110	160			3.5	195	502	442	554	155			37		6
<b>BX 112 M</b>												219	527	467	579	170			39	199	
<b>BX 132 SB</b>	38 28 <sup>(1)</sup>	80 60 <sup>(1)</sup>	M12 M10 <sup>(1)</sup>	41 31 <sup>(1)</sup>	10 8 <sup>(1)</sup>	165	130	200	M10	4	258	603	523	667		210	140	188	46	204	
<b>BX 132 MA</b>												627	547	690							


N.B.: 1) These values refer to the rear shaft end (PS).

2) "ES" hexagon is not present with PS option




# BX - IM B3 - CUS/NBR

**BX-IE3**

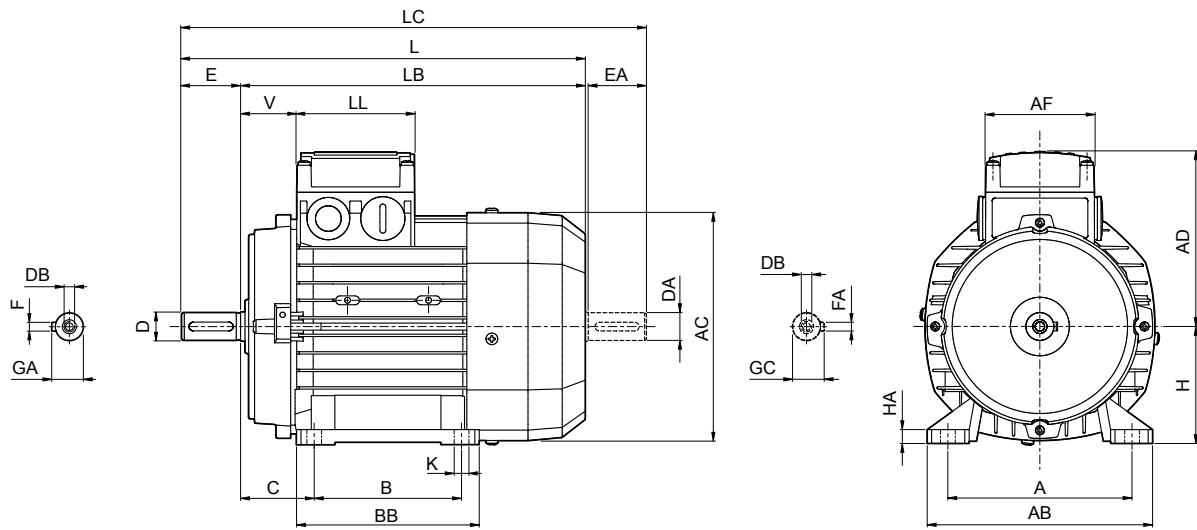


	Shaft					Housing						Motor											
	D DA	E EA	DB	GA GC	F FA	B	A	HA	BB	AB	K	C	H	AC	L	LB	LC	AD	AF	LL	V		
<b>BX 90 SR</b>	19 19 <sup>(1)</sup>	40 40 <sup>(1)</sup>	M6 M6 <sup>(1)</sup>	21.5 21.5 <sup>(1)</sup>	6 6 <sup>(1)</sup>	100	140	8	155	174	10	56	90	176	316	358	133	98	98	44			
<b>BX 90 S</b>	24 19 <sup>(1)</sup>	50 40 <sup>(1)</sup>	M8 M6(1)	27 21.5 <sup>(1)</sup>	8 6 <sup>(1)</sup>										326	368							
<b>BX 90 LA</b>															378								
<b>BX 100 LA</b>	28 24 <sup>(1)</sup>	60 50 <sup>(1)</sup>	M10 M8 <sup>(1)</sup>	31 27 <sup>(1)</sup>	8 8 <sup>(1)</sup>	140	160	10	175	192	12	63	100	195	410	350	462	142	118	118	50		
<b>BX 100 LB</b>										224					482	157							
<b>BX 112 M</b>										70					219	430	370	482			157		
<b>BX 132 SB</b>	38 28 <sup>(1)</sup>	80 60 <sup>(1)</sup>	M12 M10 <sup>(1)</sup>	41 31 <sup>(1)</sup>	10 8 <sup>(1)</sup>	178	216	12	218	254	12	89	132	258	552	472	615	193	118	118	58		
<b>BX 132 MA</b>										254					615	193							
<b>BX 160 MA</b>										264					615	193							
<b>BX 160 MB</b>	42 38 <sup>(1)</sup>	110 80 <sup>(1)</sup>	M16 M12 <sup>(1)</sup>	45 41 <sup>(1)</sup>	12 10 <sup>(1)</sup>	254	254	25	304	319	14.5	108	160	310	596	486	680	245	187	187	51		
<b>BX 160 L</b>									304	319					640	530	724						
<b>BX 180 M</b>									291	359					708	598	823	261					
<b>BX 180 L</b>	48 42 <sup>(1)</sup>	110 110 <sup>(1)</sup>	M16 M16 <sup>(1)</sup>	51.5 45 <sup>(1)</sup>	14 12 <sup>(1)</sup>	241 279	279	26	329	359	14	121	180	348	708	598	823	261	300	311	52		
<b>BX 200LAK</b>									345	378					821	711	934	328					
<b>BX 225SAK</b>									351	435					879	739	1001	348					
<b>BX 225SBK</b>	60 55 <sup>(1)</sup>	140 110 <sup>(1)</sup>	M20 M16 <sup>(1)</sup>	64 59 <sup>(1)</sup>	18 16 <sup>(1)</sup>	286	356	23	351	435	18.5	149	225	460	879	739	1001	348	300	311	48		
<b>BX 250MAK</b>				69 59 <sup>(1)</sup>	311	406	392	480	168	250					510	884	744	1010			376		
<b>BX 280SAK</b>				79.5 69 <sup>(1)</sup>	20 18 <sup>(1)</sup>	368	457	31	506	530					24	190	280	564			1088	948	1238
<b>BX 280SBK</b>	75 65 <sup>(1)</sup>	140 140 <sup>(1)</sup>	M20 M20 <sup>(1)</sup>	79.5 69 <sup>(1)</sup>	20 18 <sup>(1)</sup>	368	457	31	506	530	24	190	280	564	1088	948	1238	482	434	306	43		
<b>BX 315SAK</b>															1204	1034	1352	537			473	347	42
<b>BX 315SBK</b>															1315	1145	1453						
<b>BX 315SCK</b>	80 75 <sup>(1)</sup>	170 140 <sup>(1)</sup>	M20 M20 <sup>(1)</sup>	85 79.5 <sup>(1)</sup>	22 20 <sup>(1)</sup>	406	508	40	558	590	28	216	315	639	1204	1034	1352	537	473	347	42		
<b>BX 355SAK</b>															1315	1145	1453						
<b>BX 355MAK</b>															1479	1269	1659	603	694	413	50		
<b>BX 355MBK</b>															1584	1374	1764						
<b>BX 355MCK</b>																							

N.B.: 1) These values refer to the rear shaft end (PS).




# BX - IM B5 - CUS/NBR

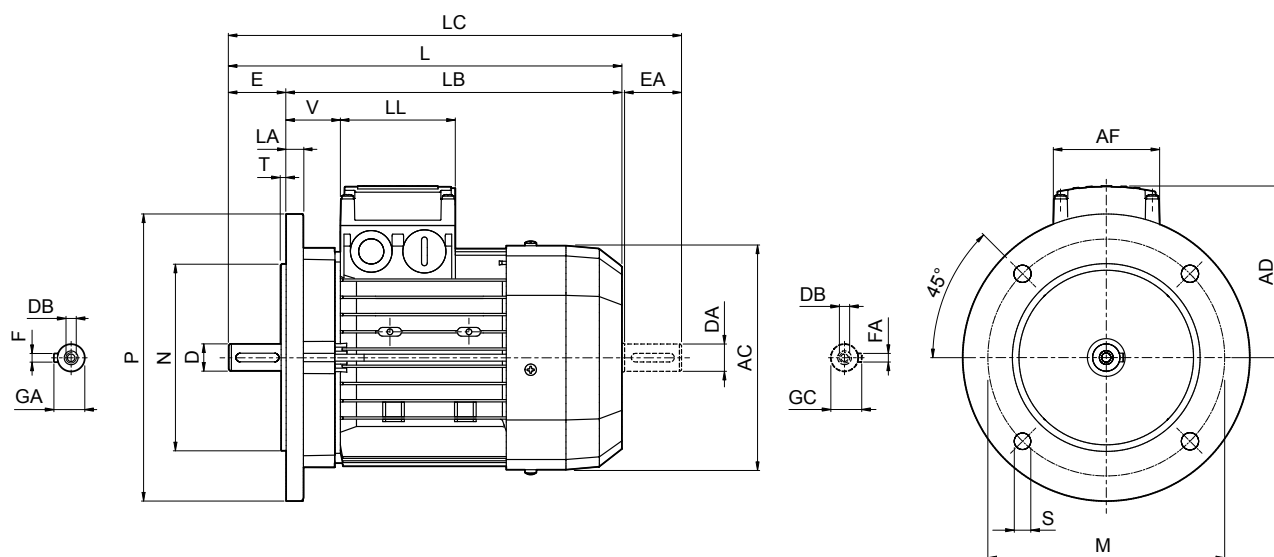


	Shaft					Flange						Motor									
	D DA	E EA	DB	GA GC	F FA	M	N	P	S	T	LA	AC	L	LB	LC	AD	AF	LL	V		
<b>BX 90 SR</b>	19 19 <sup>(1)</sup>	40 40 <sup>(1)</sup>	M6 M6 <sup>(1)</sup>	21.5 21.5 <sup>(1)</sup>	6 6 <sup>(1)</sup>	165	130	200	11.5	3.5	11.5	176	316	276	358	133	98	98	44		
<b>BX 90 S</b>	24 19 <sup>(1)</sup>	50 40 <sup>(1)</sup>	M8 M6 <sup>(1)</sup>	27 21.5 <sup>(1)</sup>	8 6 <sup>(1)</sup>								326		368						
<b>BX 90 LA</b>																					
<b>BX 100 LA</b>	28 24 <sup>(1)</sup>	60 50 <sup>(1)</sup>	M10 M8 <sup>(1)</sup>	31 27 <sup>(1)</sup>	8 8 <sup>(1)</sup>	215	180	250	14	4	15	219	430	370	482	157	118	118	52		
<b>BX 100 LB</b>													195	410	350					462	142
<b>BX 112 M</b>													20	258	552					472	615
<b>BX 132 SB</b>	38 28 <sup>(1)</sup>	80 60 <sup>(1)</sup>	M12 M10 <sup>(1)</sup>	41 31 <sup>(1)</sup>	10 8 <sup>(1)</sup>	265	230	300			20	258	552	472	615	193	118	118	58		
<b>BX 132 MA</b>																					
<b>BX 160 MA</b>	42 38 <sup>(1)</sup>	110 80 <sup>(1)</sup>	M16 M12 <sup>(1)</sup>	45 41 <sup>(1)</sup>	12 10 <sup>(1)</sup>	300	250	350	18.5	5	15	310	596	486	680	245	187	187	51		
<b>BX 160 MB</b>													640	530	724						
<b>BX 160 L</b>																					
<b>BX 180 M</b>	48 42 <sup>(1)</sup>	110 110 <sup>(1)</sup>	M16 M16 <sup>(1)</sup>	51.5 45 <sup>(1)</sup>	14 12 <sup>(1)</sup>						18	348	708	598	823	261			52		
<b>BX 180 L</b>																					
<b>BX 200LAK</b>	55 45 <sup>(1)</sup>	110 110 <sup>(1)</sup>	M20 M20 <sup>(1)</sup>	59 48.5 <sup>(1)</sup>	16 14 <sup>(1)</sup>	350	300	400	19	5	20	423	821	711	934	328	300	311	55		
<b>BX 225SAK</b>	60 55 <sup>(1)</sup>	140 110 <sup>(1)</sup>	M20 M20 <sup>(1)</sup>	64 59 <sup>(1)</sup>	18 16 <sup>(1)</sup>	400	350	450	19	5	20	465	879	739	1001	348	300	311	48		
<b>BX 225SBK</b>																					
<b>BX 250MAK</b>	65 55 <sup>(1)</sup>	140 110 <sup>(1)</sup>	M20 M20 <sup>(1)</sup>	69 59 <sup>(1)</sup>	18 16 <sup>(1)</sup>	500	450	550	19	5	24	514	884	744	1010	376	300	311			
<b>BX 280SAK</b>	75 65 <sup>(1)</sup>	140 140 <sup>(1)</sup>	M20 M20 <sup>(1)</sup>	79.5 69 <sup>(1)</sup>	20 18 <sup>(1)</sup>	500	450	550	18	5	23	567	1088	948	1238	482	434	306	43		
<b>BX 280SBK</b>																					
<b>BX 315SAK</b>	80 75 <sup>(1)</sup>	170 140 <sup>(1)</sup>	M20 M20 <sup>(1)</sup>	85 79.5 <sup>(1)</sup>	22 20 <sup>(1)</sup>	600	550	660	23	6	25	645	1204	1034	1352	537	473	347	42		
<b>BX 315SBK</b>																					
<b>BX 315SCK</b>													1315	1145	1453						
<b>BX 355SAK</b>	100 75 <sup>(1)</sup>	210 170 <sup>(1)</sup>	M24 M20 <sup>(1)</sup>	106 79.5 <sup>(1)</sup>	28 20 <sup>(1)</sup>	740	680	800	23	6	25	740	1479	1269	1659	603	694	413	50		
<b>BX 355MAK</b>																					
<b>BX 355MBK</b>																					
<b>BX 355MCK</b>													1584	1374	1764						

N.B.: 1) These values refer to the rear shaft end (PS).



# BX - IM B14 - CUS/NBR


**BX-IE3**

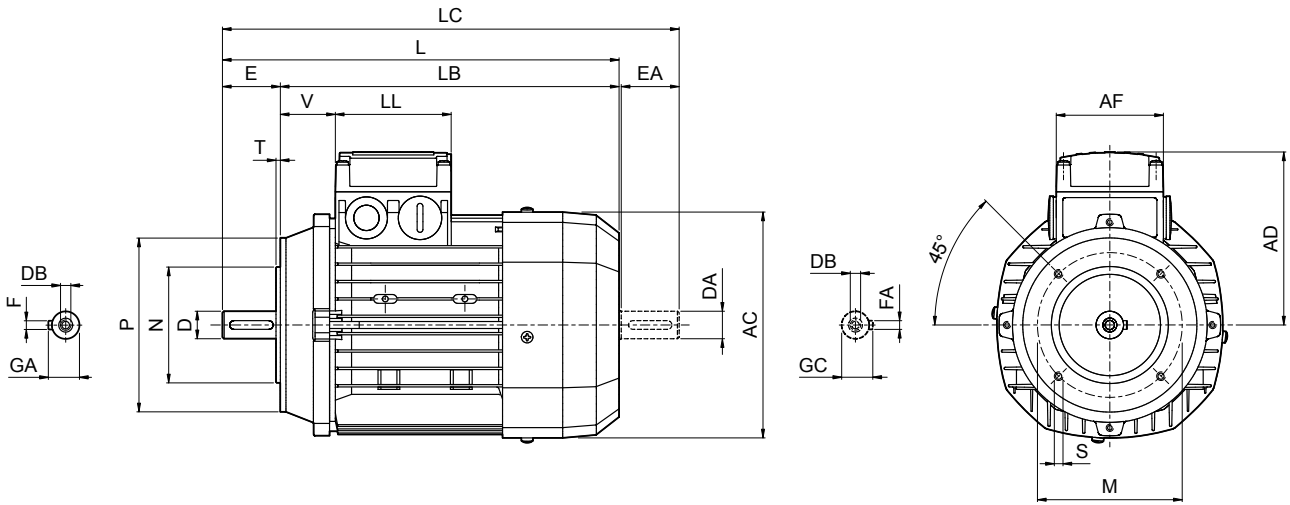


	Shaft					Housing					Motor													
	D DA	E EA	DB M6 M6 <sup>(1)</sup>	GA GC	F FA	M	N	P	S	T	AC	L	LB	LC	AD	AF	LL	V						
<b>BX 90 SR</b>	19 19 <sup>(1)</sup>	40 40 <sup>(1)</sup>	M6 M6 <sup>(1)</sup>	21.5 21.5 <sup>(1)</sup>	6 6 <sup>(1)</sup>	100	80	120	M6	3	176	316	276	358	133	98	98	44						
<b>BX 90 S</b>	24 19 <sup>(1)</sup>	50 40 <sup>(1)</sup>	M8 M6 <sup>(1)</sup>	27 21.5 <sup>(1)</sup>	8 6 <sup>(1)</sup>	115	95	140	M8			3.5		195					410	350	462	142	157	50
<b>BX 90 LA</b>																								
<b>BX 100 LA</b>	38 28 <sup>(1)</sup>	80 60 <sup>(1)</sup>	M12 M10 <sup>(1)</sup>	41 31 <sup>(1)</sup>	10 8 <sup>(1)</sup>	165	130	200	M10	4	258	552	472	615	193	118	118	58						
<b>BX 100 LB</b>																			219	430	370	482	157	
<b>BX 112 M</b>																								
<b>BX 132 SB</b>	38 28 <sup>(1)</sup>	80 60 <sup>(1)</sup>	M12 M10 <sup>(1)</sup>	41 31 <sup>(1)</sup>	10 8 <sup>(1)</sup>	165	130	200	M10	4	258	552	472	615	193	118	118	58						
<b>BX 132 MA</b>																								

N.B.: 1) These values refer to the rear shaft end (PS).





# BX - IM B5 - FD - CUS/NBR

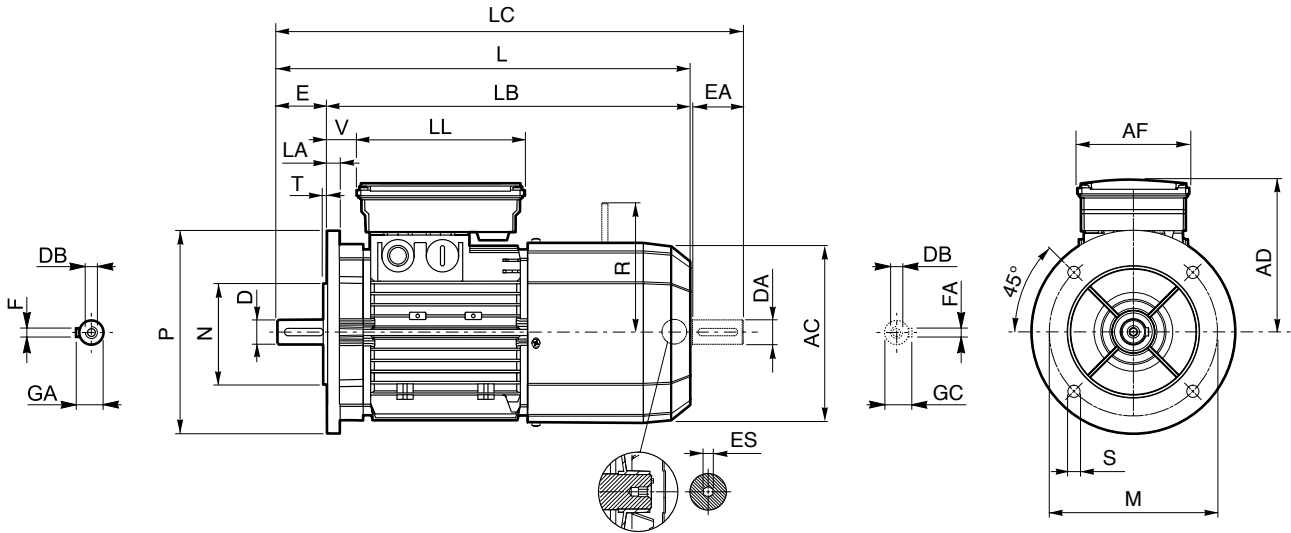


**BX-IE3**


	Shaft					Flange					Motor										
	D DA	E EA	DB M6 M6 <sup>(1)</sup>	GA GC	F FA	M	N	P	S	T	LA	AC	L	LB	LC	AD	AF	LL	V	R FD	ES <sup>(2)</sup>
<b>BX 90 SR</b>	19 19 <sup>(1)</sup>	40 40 <sup>(1)</sup>	M6 M6 <sup>(1)</sup>	21.5 21.5 <sup>(1)</sup>	6 6 <sup>(1)</sup>								400		442					129	6
<b>BX 90 S</b>	24 19 <sup>(1)</sup>	50 40 <sup>(1)</sup>	M8 M6 <sup>(1)</sup>	27 21.5 <sup>(1)</sup>	8 6 <sup>(1)</sup>	165	130	200	11.5	3.5	11.5	176	360		452	146			32		
<b>BX 90 LA</b>													410								
<b>BX 100 LA</b>											14	195	502	442	554	155	110	165		160	
<b>BX 100 LB</b>	28 24 <sup>(1)</sup>	60 50 <sup>(1)</sup>	M10 M8 <sup>(1)</sup>	31 27 <sup>(1)</sup>	8 8 <sup>(1)</sup>	215	180	250											37		
<b>BX 112 M</b>									14	4									39	199	
<b>BX 132 SB</b>	38 28 <sup>(1)</sup>	80 60 <sup>(1)</sup>	M12 M10 <sup>(1)</sup>	41 31 <sup>(1)</sup>	10 8 <sup>(1)</sup>	265	230	300											46	204	
<b>BX 132 MA</b>											16	258	661	581	724	210	140	188			
<b>BX 160 MA</b>													736	626	820						
<b>BX 160 MB</b>	42 38 <sup>(1)</sup>	110 80 <sup>(1)</sup>	M16 M12 <sup>(1)</sup>	45 41 <sup>(1)</sup>	12 10 <sup>(1)</sup>						15	310	780	670	864	245			51	266	
<b>BX 160 L</b>						300	250	350	18.5	5							187	187			
<b>BX 180 M</b>	48 42 <sup>(1)</sup>		M16 M16 <sup>(1)</sup>	51.5 45 <sup>(1)</sup>	14 12 <sup>(1)</sup>						18	348	866	756	981	261			52	305	
<b>BX 180 L</b>		110 110 <sup>(1)</sup>																			
<b>BX 200LAK</b>	55 45 <sup>(1)</sup>		M20 M16 <sup>(1)</sup>	59 48.5 <sup>(1)</sup>	16 14 <sup>(1)</sup>	350	300	400					417	967	857	1082	328		55	275	
<b>BX 225SAK</b>	60 55 <sup>(1)</sup>	140 110 <sup>(1)</sup>		64 59 <sup>(1)</sup>	18 16 <sup>(1)</sup>	400	350	450	19		20		460	1065	925	1180	348	300	311	308	
<b>BX 225SBK</b>																			48		
<b>BX 250MAK</b>	65 55 <sup>(1)</sup>			69 59 <sup>(1)</sup>						5	24		510	1070	930	1240	376			313	
<b>BX 280SAK</b>	75 65 <sup>(1)</sup>	140 140 <sup>(1)</sup>	M20 M20 <sup>(1)</sup>	79.5 69 <sup>(1)</sup>	20 18 <sup>(1)</sup>	500	450	550	18		23		564	1284	1144	1379	482	434	306	43	
<b>BX 280SBK</b>																					
<b>BX 315SAK</b>													1493	1323	1643					500	
<b>BX 315SBK</b>	80 75 <sup>(1)</sup>	170 140 <sup>(1)</sup>		85 79.5 <sup>(1)</sup>	22 20 <sup>(1)</sup>	600	550	660					639	1530	1360	1680	537	473	347	42	
<b>BX 315SCK</b>													1604	1434	1791						
<b>BX 355SAK</b>									23	6	25										
<b>BX 355MAK</b>	100 90 <sup>(1)</sup>	210 170 <sup>(1)</sup>	M24 M24 <sup>(1)</sup>	106 95 <sup>(1)</sup>	28 25 <sup>(1)</sup>	740	680	800					725	1722	1512	1902	603	694	413	50	
<b>BX 355MBK</b>																					
<b>BX 355MCK</b>													1827	1617	2082						

N.B.: 1) These values refer to the rear shaft end (PS).

2) "ES" hexagon is not present with PS option




# BX - IM B14 - FD - CUS/NBR

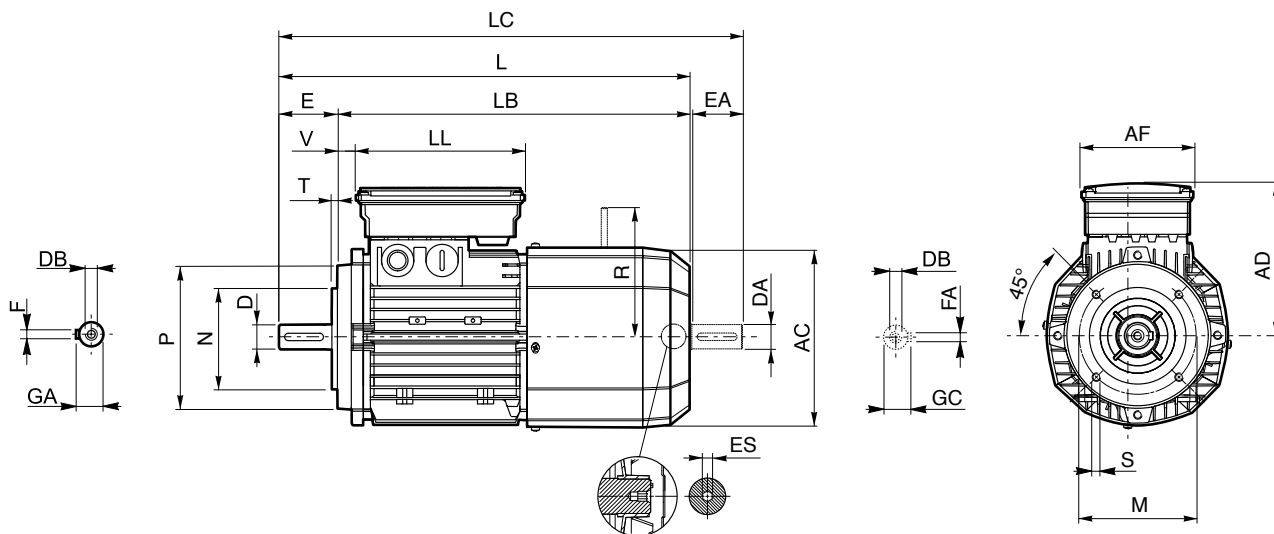

	Shaft					Flange					Motor										
	D DA	E EA	DB	GA GC	F FA	M	N	P	S	T	AC	L	LB	LC	AD	AF	LL	V	R FD	ES <sup>(2)</sup>	
<b>BX 90 SR</b>	19 19 <sup>(1)</sup>	40 40 <sup>(1)</sup>	M6 M6 <sup>(1)</sup>	21.5 21.5 <sup>(1)</sup>	6 6 <sup>(1)</sup>	100	80	120	M6			400		442						129	
<b>BX 90 S</b>	24 19 <sup>(1)</sup>	50 40 <sup>(1)</sup>	M8 M6 <sup>(1)</sup>	27 21.5 <sup>(1)</sup>	8 6 <sup>(1)</sup>	115	95	140		3	176	360		146				32			
<b>BX 90 LA</b>												410		452		110	165				
<b>BX 100 LA</b>									M8											160	
<b>BX 100 LB</b>	28 24 <sup>(1)</sup>	60 50 <sup>(1)</sup>	M10 M8 <sup>(1)</sup>	31 27 <sup>(1)</sup>	8 8 <sup>(1)</sup>	130	110	160		3.5	195	502	442	554	155				37		6
<b>BX 112 M</b>											219	527	467	579	170				39	199	
<b>BX 132 SB</b>	38 28 <sup>(1)</sup>	80 60 <sup>(1)</sup>	M12 M10 <sup>(1)</sup>	41 31 <sup>(1)</sup>	10 8 <sup>(1)</sup>	165	130	200	M10	4	258	661	581	724	210	140	188	46	204		
<b>BX 132 MA</b>																					


N.B.: 1) These values refer to the rear shaft end (PS).

2) "ES" hexagon is not present with PS option




# MX


**MX-IE3**

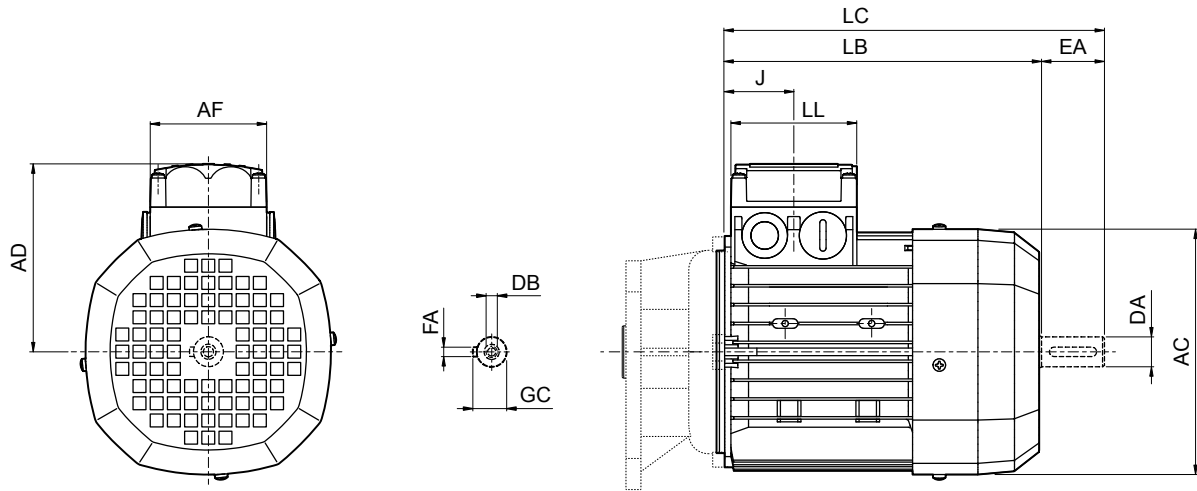

	Rear shaft end					Motor						
	DA	EA	DB	GC	FA	AC	LB	LC	AF	LL	J	AD
<b>MX 05A</b>	9	20	M3	10	3	121	165	191	74	80	48	95
<b>MX 05B</b>												
<b>MX 1SA</b>	11	23	M4	13	4	138	187	219			45	108
<b>MX 1SB</b>												
<b>MX 2SA</b>	14	30	M5	16	5	156	200	232				
<b>MX 2SB</b>							246	278			44	119
<b>MX 3SA</b>	24	50	M8	27	8	195	265	317	98	98		
<b>MX 3SB</b>												
<b>MX 3LA</b>							305	357				
<b>MX 3LB</b>												
<b>MX 4SA</b>	28	60	M10	31	258	361	424	118	118	64.5	193	
<b>MX 4SB</b>												
<b>MX 4LA</b>												396
<b>MX 5SA</b>	38	80	M12	41	10	310	418	502	187	187	77	245
<b>MX 5SB</b>							462	546				
<b>MX 5LA</b>												




# MX - FD

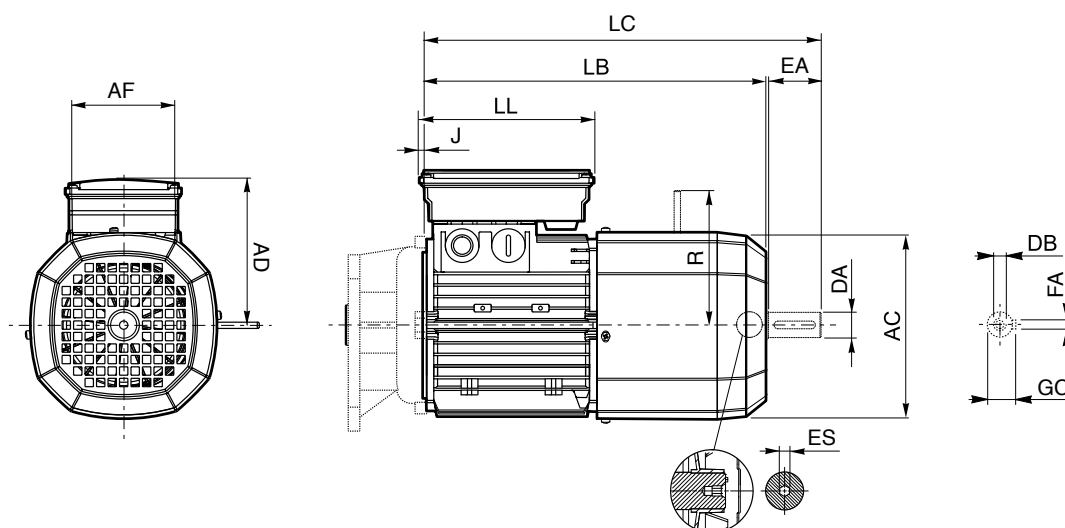

**MX-IE3**


	Rear shaft end					Motor														
	DA	EA	DB	GC	FA	AC	LB	LC	AF	LL	J	AD	R		ES <sup>(1)</sup>					
<b>MX 05A</b>	9	20	M3	10	3	121	231	253	98	133	5	122	96	96	5					
<b>MX 05B</b>																				
<b>MX 1SA</b>	11	23	M4	13	4	138	248	273								8	135	103	103	5
<b>MX 1SB</b>																				
<b>MX 2SA</b>																				
<b>MX 2SB</b>	14	30	M5	16	5	156	272	303								9	143	129	134	
							318	349												
<b>MX 3SA</b>	24	50	M8	27	8	195	355	407	110	165	7	155	160	160	6					
<b>MX 3SB</b>																				
<b>MX 3LA</b>																				
<b>MX 3LB</b>							397	450												
<b>MX 4SA</b>	28	60	M10	31	10	258	470	534	140	188	210	204	200							
<b>MX 4SB</b>																				
<b>MX 4LA</b>							494	558					226							
<b>MX 5SA</b>	38	80	M12	41	10	310	558	644	187	187	17	245	266	247	—					
<b>MX 5SB</b>																				
<b>MX 5LA</b>							602	686												

N.B.: 1) "ES" hexagon is not present with PS option




# MX CUS/NBR


**MX-IE3**

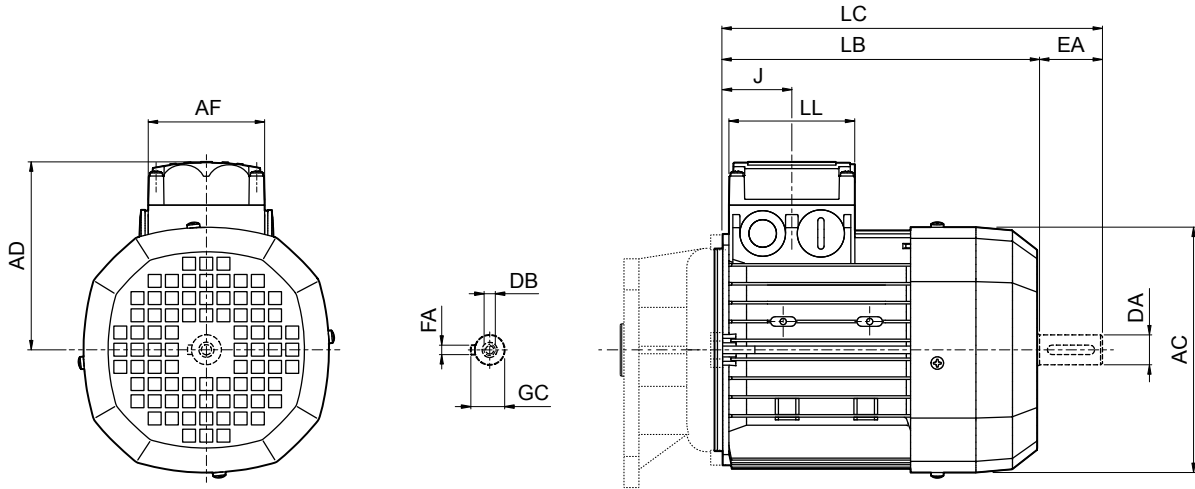

	Rear shaft end					Motor						
	DA	EA	DB	GC	FA	AC	LB	LC	AF	LL	J	AD
<b>MX 2SB</b>	14	30	M5	16	5	176	262	293	98	98	79	133
<b>MX 3SA</b>	24	50	M8	27	8	195	265	317				
<b>MX 3SB</b>							305	357			53.5	
<b>MX 3LA</b>												
<b>MX 3LB</b>												
<b>MX 4SA</b>	28	60	M10	31		258	361	424	118	118	64.5	193
<b>MX 4SB</b>							420	483				
<b>MX 4LA</b>												
<b>MX 5SA</b>	38	80	M12	41	10	310	418	502	187	187	77	245
<b>MX 5SB</b>							462	546				
<b>MX 5LA</b>												




# MX - FD CUS/NBR

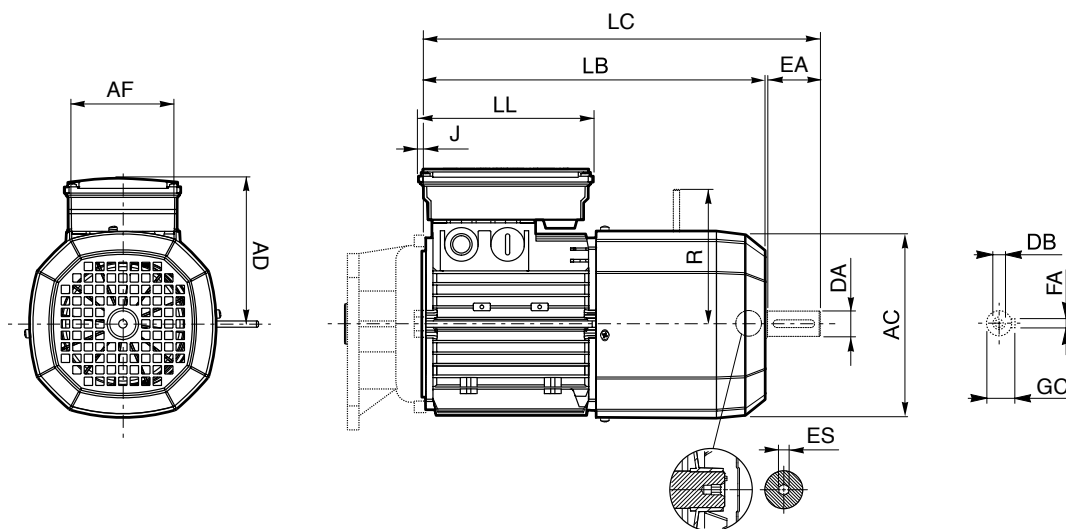

**MX-IE3**

	Rear shaft end					Motor										
	DA	EA	DB	GC	FA	AC	LB	LC	AF	LL	J	AD	R	ES <sup>(1)</sup>		
<b>MX 2SB</b>	14	30	M5	16	5	176	347	379	110	165	-17	146	129	134		
<b>MX 3SA</b>	24	50	M8	27	8	195	355	407			140	188	7	155	160	160
<b>MX 3SB</b>							397	450								
<b>MX 3LA</b>																
<b>MX 3LB</b>																
<b>MX 4SA</b>	28	60	M10	31	258	470	534	187			187	17	245	204	200	
<b>MX 4SB</b>						528	592								226	
<b>MX 4LA</b>																
<b>MX 5SA</b>	38	80	M12	41	10	310	558	644	187	187	17	245	266	247		
<b>MX 5SB</b>							602	686							—	
<b>MX 5LA</b>																


N.B.: 1) "ES" hexagon is not present with PS option





M16 MOTORS DIMENSIONS BE-ME

BE-IE2


2 P		3000 min <sup>-1</sup> - S1													50 Hz											
P <sub>n</sub> kW hp	P <sub>n</sub> hp	n min <sup>-1</sup>	M <sub>n</sub> Nm lb-in	In 400V A	η%		cos φ	I <sub>s</sub> I <sub>n</sub>	M <sub>s</sub> M <sub>n</sub>	M <sub>a</sub> M <sub>n</sub>	KVA code	J <sub>m</sub> x 10 <sup>-4</sup>		IM B5		Mod	M <sub>b</sub>		Z <sub>0</sub> 1/h	J <sub>m</sub> x 10 <sup>-4</sup>		IM B5		Standard	CUS variant	BIS variant
					100%	75%						kgm <sup>2</sup>	lb-ft <sup>2</sup>	kg	lbs		Nm	lb-in		kgm <sup>2</sup>	lb-ft <sup>2</sup>	kg	lbs			
0.75	1	2860	2.5	1.65	80	79.6	0.83	6.8	3.8	3.5	J	9	0.0214	9.5	20.9	FD 04	5	44.2	4300	10.6	0.0252	13.4	30	•	•	•
1.1	1.5	2845	3.7	2.35	81.5	82.2	0.83	6.9	3.8	3.1	J	11.4	0.0271	11.3	24.9	FD 04	10	88.5	3100	13	0.0308	15.2	34	•	•	•
1.5	2	2865	5	3.2	81.3	80.7	0.82	6.8	3.6	2.8	J	12.5	0.0297	12.3	27.1	FD 14	15	132	2400	14.1	0.0335	16.5	36	•	•	•
2.2	3	2870	7.3	4.7	83.2	83.1	0.82	6.9	3.1	2.9	J	16.7	0.0396	14	30.9	FD 05	26	230	2400	20.7	0.0491	20	44	•	•	•
3	4	2880	9.9	6.2	84.6	84.6	0.83	7.3	3.5	3.1	J	39	0.0925	23	50.7	FD 15	26	230	1800	43	0.1020	29	64	•	•	•
3.7	5	2930	12.1	7.8	85.5	83	0.79	7.9	3.5	3.1	J	57	0.1353	28	61.7	FD 06S	40	354	1100	66	0.1566	39	86	•	•	•
4	5.4	2920	13.1	8.2	85.8	85.5	0.82	7.9	3.5	3.1	K	57	0.1353	28	61.7	FD 06S	40	354	1000	66	0.1566	39	86	•	•	•
5.5	7.5	2925	18	10.6	87	85	0.86	8.5	3.6	3.3	K	145	0.3441	42	92.6	FD 06	50	443	640	156	0.3702	55	121	•	•	•
7.5	10	2935	24	14.3	88.1	87.4	0.86	8.8	3.9	3.6	K	178	0.4224	53	117	FD 06	50	443	700	189	0.4485	66	146	•	•	•
9.2	12.5	2920	30	16.4	88.8	86.5	0.91	8.4	3.7	3.3	J	210	0.4983	65	143	FD 56	75	664	530	221	0.5244	78	172	•	•	•
11	15	2940	36	20	89.4	89.5	0.89	8.1	3	2.9	J	340	0.8068	84	185	—	—	—	—	—	—	—	—	•	•	•
15	20	2950	49	27.2	90.5	90.5	0.88	8.5	3	2.8	K	420	0.9967	97	214	—	—	—	—	—	—	—	—	•	•	•
18.5	25	2945	60	32	90.9	90.5	0.91	7.7	2.9	2.7	H	490	1.1628	109	240	—	—	—	—	—	—	—	—	•	•	•




4 P		1500 min <sup>-1</sup> - S1															50 Hz														
		d.c. brake																													
		FD																													
P <sub>n</sub>		n	M <sub>n</sub>	In	η%	cos φ	I <sub>s</sub>	M <sub>s</sub>	M <sub>a</sub>	KVA	J <sub>m</sub>	IM B5	Mod	M <sub>b</sub>	Z <sub>0</sub>	J <sub>m</sub>	IM B5	Standard	CUS variant	BIS variant											
hp		min <sup>-1</sup>	Nm	A	100% 75% 50%	I <sub>n</sub>	M <sub>n</sub>	M <sub>n</sub>	M <sub>n</sub>	code	kgm <sup>2</sup> x 10 <sup>-4</sup>	kg lbs		Nm	1/h	kgm <sup>2</sup> x 10 <sup>-4</sup>	kg lbs	CE	CE + UL	CE + BIS											
0.12	0.16	BE 63A	4	1360	0.84	7.4	0.45	59.1	59.6	53.5	0.65	3	2	2.2	G	2.3	0.0055	3.9	8.6	FD 02	1.75	15.5	11000	14000	2.9	0.0069	5.6	12	•	•	•
0.18	0.25	BE 63B	4	1370	1.25	11.1	0.64	64.7	65.1	59.8	0.62	3.5	2.3	2.5	G	3.3	0.0078	5.1	11.2	FD 02	3.5	31.0	9000	12000	3.9	0.0093	6.8	15	•	•	•
0.25	0.33	BE 71A	4	1380	1.73	15.3	0.68	68.5	68	62	0.78	4	2.3	2.5	H	5.8	0.0138	5.1	11.2	FD 03	3.5	31.0	11000	16000	6.9	0.0164	7.8	17	•	•	•
0.37	0.5	BE 71B	4	1385	2.55	22.6	1.05	72.7	69.3	64.2	0.75	4.0	2.3	2.2	G	6.9	0.0164	5.9	13.0	FD 03	5	44.3	6800	11000	8	0.0190	8.6	19	•	•	•
0.55	0.75	BE 80A	4	1430	3.7	32.7	1.38	77.1	73.4	68	0.77	6	2.2	1.9	L	19	0.0451	9.9	21.8	FD 04	10	89	4000	7700	20.6	0.0489	13.8	30	•	•	•
0.75	1	BE 80B	4	1430	5	44.3	1.65	81	80.5	78	0.81	6.1	3.2	3	H	28	0.0664	12.2	26.9	FD 04	15	133	3600	6800	29.6	0.0702	16.1	36	•	•	•
1.1	1.5	BE 90S	4	1430	7.4	65.5	2.53	82.5	82	79.5	0.76	6.3	2.9	2.8	J	28	0.0664	13.6	30.0	FD 14	15	133	4600	7700	29.6	0.0702	17.8	39	•	•	•
1.5	2	BE 90LA	4	1430	10	88.5	3.5	83.5	83	80	0.74	5.9	3.1	3	J	34	0.0807	15.1	33.3	FD 05	26	230	3500	6200	38	0.0902	21	47	•	•	•
2.2	3	BE 100LA	4	1430	14.7	130	4.9	85.4	85	84	0.76	5.8	3	2.8	H	54	0.1281	22	48.5	FD 15	40	354	2700	4700	58	0.1376	29	64	•	•	•
3	4	BE 100LB	4	1420	20	177	6.6	85.5	86	85.5	0.77	5.9	2.8	2.6	H	61	0.1448	24	52.9	FD 15	40	354	2500	4600	65	0.1542	31	68	•	•	•
3.7	5	BE 112M	4	1445	27	239	8.2	86.3	87	84.3	0.76	6.5	2.8	2.8	K	105	0.2492	32	70.5	FD 06S	60	531	—	1500	114	0.2705	42	93	•	•	•
4	5.4	BE 112M	4	1440	27	239	8.3	86.6	87	86	0.8	6.5	2.8	2.8	H	105	0.2492	32	70.5	FD 06S	60	531	—	1500	114	0.2705	42	93	•	•	•
5.5	7.5	BE 132S	4	1460	36	319	11.1	88.5	88.5	87.5	0.81	7.3	2.9	2.9	J	270	0.6407	53	117.0	FD 56	75	664	—	1100	281	0.6668	66	146	•	•	•
7.5	10	BE 132MA	4	1460	49	434	14.8	89	89	88.5	0.82	6.9	2.9	2.8	H	319	0.7570	59	130.0	FD 06	100	885	—	920	330	0.7831	72	159	•	•	•
9.2	12.5	BE 132MB	4	1460	60	531	18.1	89.5	89.5	88.5	0.82	6.9	2.9	3	H	360	0.8543	70	154.0	FD 07	150	1328	—	950	382	0.9065	86	190	•	•	•
11	15	BE 160M	4	1465	72	637	21.5	91	91.3	90.5	0.81	6.5	2.8	2.6	H	650	1.5425	99	218.0	FD 08	170	1505	—	770	725	1.7205	129	284	•	•	•
15	20	BE 160L	4	1465	98	867	28.7	90.8	91	90.5	0.83	6.5	2.6	2.3	H	790	1.8747	115	254.0	FD 08	200	1770	—	690	865	2.0527	145	320	•	•	•
18.5	25	BE 180M	4	1465	121	1071	35	91.6	92	91.3	0.83	6.5	2.6	2.5	H	1250	2.9662	135	298.0	FD 09	300	2655	—	700	1450	3.4409	175	386	•	•	•
22	30	BE 180L	4	1465	143	1266	41	91.6	91.8	91.4	0.84	6.8	2.7	2.6	H	1650	3.9155	157	346.0	FD 09	300	2655	—	—	1850	4.3901	197	434	•	•	•




6 P		1000 min <sup>-1</sup> - S1													50 HZ												
		d.c. brake																									
P <sub>n</sub> kW	hp	n min <sup>-1</sup>	M <sub>n</sub> Nm	In 400V A	η%		cos φ	I <sub>s</sub> I <sub>n</sub>	M <sub>s</sub> M <sub>n</sub>	M <sub>a</sub> M <sub>n</sub>	KVA code	J <sub>m</sub> x 10 <sup>-4</sup>		IM B5		Mod	M <sub>b</sub>		Z <sub>0</sub> 1/h		J <sub>m</sub> x 10 <sup>-4</sup>		IM B5		Standard	CUS variant	BIS variant
					100%	75%						kgm <sup>2</sup>	lb-ft <sup>2</sup>	kg	lbs		Nm	lb-in	NB	SB	kgm <sup>2</sup>	lb-ft <sup>2</sup>	kg	lbs			
0.75	1	<b>BE 90S</b> 6	7.7	2.06	75.9	75.9	73	0.69	5.1	3.1	J	33	0.0783	15	33.1	<b>FD 14</b>	15	133	3600	6800	34.6	0.0821	19.2	42	•	•	•
1.1	1.5	<b>BE 100M</b> 6	11.1	2.75	78.1	76.2	73	0.74	4.9	2.2	G	82	0.1946	22	48.5	<b>FD 15</b>	26	230	1100	2000	86	0.2041	30	66	•	•	•
1.5	2	<b>BE 100LA</b> 6	15.2	3.9	79.8	77.5	74	0.72	5.6	2.5	J	95	0.2254	24	52.9	<b>FD 15</b>	40	354	1900	4100	99	0.2349	30	66	•	•	•
2.2	3	<b>BE 112M</b> 6	22	5.2	81.8	81.8	79.3	0.74	5.2	2.6	G	168	0.3987	32	70.5	<b>FD 06S</b>	60	531	—	2400	177	0.4200	43	95	•	•	•
3	4	<b>BE 132S</b> 6	30	6.6	83.3	83.3	82.4	0.79	6.1	2.1	H	295	0.7000	44	97.0	<b>FD 56</b>	75	664	—	1400	306	0.7261	57	126	•	•	•
3.7	5	<b>BE 132MA</b> 6	36.1	8.3	84.3	83.6	81.3	0.76	6.9	2.1	J	383	0.9089	44	97	<b>FD 06</b>	100	885	—	1100	394	0.9350	69	152	•	•	•
4	5.4	<b>BE 132MA</b> 6	40	8.7	84.9	85	83.1	0.79	6.9	2.2	J	383	0.9089	56	123	<b>FD 06</b>	100	885	—	1000	394	0.9350	69	152	•	•	•
5.5	7.5	<b>BE 160MA</b> 6	54	11.6	87	87	86.4	0.79	6.6	2.5	H	740	1.7560	83	183	<b>FD 08</b>	170	1505	—	610	815	1.9340	113	249	•	•	•
7.5	10	<b>BE 160MB</b> 6	74	15	88	88	87.2	0.82	6.6	2.3	H	970	2.3018	103	227	<b>FD 08</b>	170	1505	—	730	1045	2.4798	133	293	•	•	•




<b>4 P</b>	<b>1800 min<sup>-1</sup> - S1</b>		<b>60 Hz</b>	
------------	-----------------------------------	--	--------------	--

P <sub>n</sub> kW hp		n min <sup>-1</sup>	M <sub>n</sub> Nm	I <sub>n</sub> 400V A	η%		cos φ	I <sub>s</sub> I <sub>n</sub>	M <sub>s</sub> M <sub>n</sub>	M <sub>a</sub> M <sub>n</sub>	KVA code	J <sub>m</sub> x 10 <sup>-4</sup>		IM B5 Kg lbs	Mod	M <sub>b</sub> Nm lb-in	Z <sub>0</sub> 1/h		J <sub>m</sub> x 10 <sup>-4</sup> kgm <sup>2</sup> lb-ft <sup>2</sup>	IM B5 Kg lbs		Standard	cus variant						
					100%	75%						NB	SB				Kg	lbs											
					d.c. brake																								
0.12	BE63A	4	1700	0.67	5.9	0.41	64.8	62	55	0.61	4	3.4	2.8	J	2.3	0.0055	3.9	8.6	FD 02	1.75	15.5	7800	10000	2.9	0.0069	5.6	12	•	•
0.18	BE63B	4	1700	1	8.9	0.58	68	67.9	61.2	0.59	4.2	4	3.1	J	3.3	0.0078	5.1	11.2	FD 02	3.5	31.0	6500	8400	3.9	0.0093	6.8	15	•	•
0.25	BE71A	4	1700	1.4	12.4	1.04	70	68.3	61.6	0.74	5	3.1	3.4	K	5.8	0.0138	5.1	11.2	FD 03	3.5	31.0	9900	14000	6.9	0.0164	7.8	17	•	•
0.37	BE71B	4	1715	2.06	18.2	0.93	72	71.7	66.3	0.74	5	3	3.2	J	6.9	0.0164	5.9	13.0	FD 03	5	44.3	6300	9900	8	0.0190	8.6	19	•	•
0.55	BE 80A	4	1740	3	26.6	1.23	75.5	73.1	66.8	0.74	8.7	3.8	3.0	N	19	0.0451	9.9	21.8	FD 04	10	88.5	3300	6800	20.6	0.0489	13.8	30	•	•
0.75	BE 80B	4	1745	4.1	36.3	1.46	82.5	81.1	77.6	0.78	7.6	3.5	3.2	K	28	0.0664	12.2	26.9	FD 04	15	133	2300	4600	29.6	0.0702	16.1	36	•	•
1.1	BE 90S	4	1740	6	53.1	2.25	84	82.7	79	0.73	7.7	3.5	3.2	L	28	0.0664	13.6	30.0	FD 14	15	133	2700	6200	29.6	0.0702	17.8	39	•	•
1.5	BE 90LA	4	1740	8.2	72.6	3.1	84.5	83.9	80.7	0.73	7.1	3.6	3.4	K	34	0.0807	15.1	33.3	FD 05	26	230	2100	4500	38	0.0902	21	47	•	•
2.2	BE 100LA	4	1745	12	106	4.2	87.5	85.5	83.2	0.76	7	3.3	2.9	J	54	0.1281	22	48.5	FD 15	40	354	890	2400	58	0.1376	29	64	•	•
3	BE 100LB	4	1735	16.5	146	5.9	87.5	87.7	86.3	0.76	7	3.2	2.9	K	61	0.1448	24	52.9	FD 15	40	354	—	1000	65	0.1542	31	68	•	•
3.7	BE 112M	4	1750	20	177	6.6	87.5	87.5	86.1	0.8	7.8	3.3	3.2	K	105	0.2492	32	70.5	FD 06S	60	531	—	730	114	0.2705	42	93	•	•
4	BE 112M	4	1745	21.9	194	7.1	87.5	88	86.7	0.8	7.3	3.0	3.2	J	105	0.2492	32	70.5	FD 06S	61	540	—	730	114	0.2705	43	95	•	•
5.5	BE 132S	4	1760	30	266	9.3	89.5	89.5	87.7	0.83	8.7	3.5	3.5	K	270	0.6407	53	117	FD 56	75	664	—	880	281	0.6668	66	146	•	•
7.5	BE 132MA	4	1760	43	381	12.7	89.5	89.5	87.9	0.83	8	3.4	3.3	K	319	0.7570	59	130	FD 06	100	885	—	700	330	0.7831	72	159	•	•
9.2	BE 132MB	4	1760	50	443	15.6	90	90	88.6	0.82	8.3	3.5	3.6	K	360	0.8543	70	154	FD 07	150	1328	—	590	382	0.9065	86	190	•	•
11	BE 160M	4	1765	60	531	18.7	91	91	90	0.81	7.7	2.9	2.8	J	650	1.5425	99	218	FD 08	170	1505	—	370	725	1.7205	129	284	•	•
15	BE 160L	4	1770	81	717	25.5	91	90.5	89.5	0.81	7.1	3.1	2.7	J	790	1.8747	115	254	FD 08	200	1770	—	320	865	2.0527	145	320	•	•
18.5	BE 180M	4	1765	100	885	30.3	92.4	91.9	90.5	0.83	7.3	2.7	2.5	H	1250	2.9663	135	298	FD 09	300	2655	—	200	1450	3.4409	175	386	•	•
22	BE 180L	4	1770	119	1053	36	92.4	92.5	92.2	0.83	8.1	3.3	3.2	J	1650	3.9155	157	346	FD 09	300	2655	—	150	1850	4.3901	197	434	•	•





2 P		3000 min <sup>-1</sup> - S1														50 Hz											
		d.c. brake																									
P <sub>n</sub>	kW	hp	P <sub>n</sub>	n	M <sub>n</sub>	In	1%			cos φ	I <sub>s</sub>	M <sub>s</sub>	M <sub>a</sub>	KVA	J <sub>m</sub>	IM B5	Mod	M <sub>b</sub>	Z <sub>0</sub>	J <sub>m</sub>	IM B5	Standard	cus variant				
							100%	75%	50%															kgm <sup>2</sup>	lb-ft <sup>2</sup>	kg	lbs
0.75	1	1.5	2	2860	2.5	1.63	80	79.6	76.4	0.83	6.8	3.8	3.5	J	9	8.8	FD 04	5	2300	4300	10.6	0.0252	12.7	28	•	•	
1.1	1.5	2	2845	3.7	2.35	2.35	81.5	82.2	79.9	0.83	6.9	3.8	3.1	J	11.4	10.6	FD 04	10	1500	3100	13	0.0308	14.5	32	•	•	
1.5	2	3	2845	5.0	3.2	3.2	81.3	79	76	0.84	6.1	2.9	2.7	H	24	15.5	FD 15	13	470	1200	28	0.0664	22	49	•	•	
2.2	3	4	2895	7.3	4.8	4.8	83.2	83.1	80.8	0.8	6.3	2.7	2.5	H	31	18.7	FD 15	26	500	1200	35	0.0831	25	56	•	•	
3	4	5	2880	9.9	6.2	6.2	84.6	84.6	83.7	0.83	7.3	3.5	3.1	J	39	22	FD 15	26	800	1800	43	0.1020	28	63	•	•	
3.7	5	7.5	2930	12.1	7.8	7.8	84.7	83	81.2	0.79	7.9	2.9	2.8	J	101	33	FD 06	50	630	—	112	0.2658	46	101	•	•	
4	5.4	9	2900	13.2	7.8	7.8	85.8	84.5	82.2	0.87	7.0	2.9	2.8	H	101	33	FD 06	50	580	—	112	0.2658	46	101	•	•	
5.5	7.5	10	2925	18.0	10.6	10.6	87.0	85.0	81.7	0.86	8.5	3.6	3.3	K	145	40	FD 06	50	640	—	156	0.3702	53	117	•	•	
7.5	10	15	2935	24	14.3	14.3	88.1	87.4	84.7	0.86	8.8	3.9	3.6	K	178	51	FD 06	50	700	—	189	0.4485	64	141	•	•	
9.2	12.5	18	2920	30	16.4	16.4	88.8	86.5	84.2	0.91	8.4	3.7	3.3	J	210	60	FD 56	75	530	—	221	0.5244	73	161	•	•	
11	15	20	2940	36	20.0	20.0	89.4	89.5	88.0	0.89	8.1	3.0	2.9	J	340	70									•	•	
15	20	25	2950	49	27.2	27.2	90.5	90.5	89.5	0.88	8.5	3.0	2.8	K	420	83										•	•
18.5	25	30	2945	60	32	32	90.9	90.5	89.8	0.91	7.7	2.9	2.7	H	490	95										•	•




<b>4 P</b>	<b>1500 min<sup>-1</sup> - S1</b>										<b>50 Hz</b>
	d.c. brake										


P <sub>n</sub>	kW	hp	P <sub>n</sub>	n	M <sub>n</sub>	In	η%		cos φ	I <sub>s</sub>	M <sub>s</sub>	M <sub>a</sub>	M <sub>n</sub>	KVA	J <sub>m</sub>	IM B5		Mod	M <sub>b</sub>		Z <sub>0</sub>		J <sub>m</sub>	IM B5		Standard	CUS variant		
							100%	75%								50%	Nm		lb-in	NB	SB	kgm <sup>2</sup>		lb-ft <sup>2</sup>	kg			lbs	kgm <sup>2</sup>
0.12	0.16	<b>ME 05A</b>	4	1360	0.84	7.4	0.45	59.1	59.6	53.5	3	2.2	2.3	G	2.3	0.0055	3.6	7.9	<b>FD 02</b>	1.75	15.5	11000	14000	2.9	0.0069	5.3	12	•	•
0.18	0.25	<b>ME 05B</b>	4	1370	1.25	11.1	0.64	64.7	65.1	59.8	3.5	2.5	2.3	G	3.3	0.0078	4.8	10.6	<b>FD 02</b>	3.5	31.0	9000	12000	3.9	0.0093	6.5	14	•	•
0.25	0.33	<b>ME 1SA</b>	4	1380	1.73	15.3	0.68	68.5	68	62	4	2.5	2.3	H	5.8	0.0138	4.8	10.6	<b>FD 03</b>	3.5	31.0	11000	16000	6.9	0.0164	7.5	17	•	•
0.37	0.5	<b>ME 1SB</b>	4	1385	2.55	22.6	1.05	72.7	69.3	64.2	4.0	2.2	2.3	G	6.9	0.0164	5.5	12.1	<b>FD 03</b>	5	44.3	6800	11000	8	0.0190	8.2	18	•	•
0.55	0.75	<b>ME 2SA</b>	4	1430	3.7	32.7	1.38	77.1	73.4	68	6	2.2	1.9	L	19	0.0451	9.9	21.8	<b>FD 04</b>	10	88.5	4000	7700	20.6	0.0489	13.8	30	•	•
0.75	1	<b>ME 2SB</b>	4	1430	5	44.3	1.65	81	80.5	78	6.1	3.0	3.2	H	28	0.0664	12.2	26.9	<b>FD 04</b>	15	133	3600	6800	29.6	0.0702	16.1	36	•	•
1.1	1.5	<b>ME 3SA</b>	4	1430	7.4	65.5	2.6	82.5	82.0	79.0	5.5	2.8	2.5	H	34	0.0807	15.5	34.2	<b>FD 15</b>	26	230	2700	4700	38	0.0902	22	47	•	•
1.5	2	<b>ME 3SB</b>	4	1420	10	88.5	3.48	84.0	84.0	83.0	5.9	2.9	2.9	J	40	0.0949	17	37.5	<b>FD 15</b>	26	230	2600	4700	44	0.1044	23	51	•	•
2.2	3	<b>ME 3LA</b>	4	1430	14.7	130	4.89	85.4	85	84	5.8	3	2.8	H	54	0.1281	21	46.3	<b>FD 15</b>	40	354	2700	4700	58	0.1376	27	60	•	•
3	4	<b>ME 3LB</b>	4	1420	20	177	6.58	85.5	86.0	85.5	5.9	2.8	2.6	H	61	0.1448	23	50.7	<b>FD 15</b>	40	354	2500	4600	65	0.1542	29	64	•	•
3.7	5	<b>ME 4SA</b>	4	1460	27	239	7.5	86.6	87.1	85.6	7.1	3	3.1	K	213	0.5055	42	92.6	<b>FD 56</b>	75	664	—	1100	224	0.5316	55	121	•	•
4	5.4	<b>ME 4SA</b>	4	1440	27	239	8.25	87.5	86.8	84.0	7.1	3	3.1	J	213	0.5055	42	92.6	<b>FD 56</b>	75	664	—	1100	224	0.5316	55	121	•	•
5.5	7.5	<b>ME 4SB</b>	4	1460	36	319	11.07	88.5	88.5	87.5	7.3	2.9	2.9	J	270	0.6407	51	112	<b>FD 56</b>	75	664	—	1100	281	0.6668	64	141	•	•
7.5	10	<b>ME 4LA</b>	4	1460	49	434	14.83	89.0	89.0	88.5	6.9	2.8	2.8	H	319	0.7570	57	126	<b>FD 06</b>	100	885	—	920	330	0.7831	70	154	•	•
9.2	12.5	<b>ME 4LB</b>	4	1460	60	531	18.09	89.5	89.5	88.5	6.9	3.0	3.0	H	360	0.8543	65	143	<b>FD 07</b>	150	1328	—	950	382	0.9065	81	179	•	•
11	15	<b>ME 5SA</b>	4	1465	72	637	21.54	91.0	91.3	90.5	6.5	2.6	2.6	H	650	1.5425	85	187	<b>FD 08</b>	170	1505	—	770	725	1.7205	115	254	•	•
15	20	<b>ME 5LA</b>	4	1465	98	867	28.73	90.8	91.0	90.5	6.5	2.3	2.3	H	790	1.8747	101	223	<b>FD 08</b>	200	1770	—	690	865	2.0527	131	289	•	•




<b>6 P</b>		<b>1000 min<sup>-1</sup> - S1</b>										<b>50 Hz</b>											
		d.c. brake										a.c. brake											
		FD										FA											
<b>P<sub>n</sub></b>		<b>n</b>	<b>M<sub>n</sub></b>	<b>I<sub>n</sub></b>	<b>In</b>	<b>η%</b>		<b>cos φ</b>	<b>I<sub>s</sub></b>	<b>M<sub>s</sub></b>	<b>M<sub>a</sub></b>	<b>J<sub>m</sub></b>	<b>IM B5</b>	<b>Mod</b>	<b>M<sub>b</sub></b>	<b>Z<sub>0</sub></b>	<b>J<sub>m</sub></b>	<b>IM B5</b>	<b>Mod</b>	<b>M<sub>b</sub></b>	<b>Z<sub>0</sub></b>	<b>J<sub>m</sub></b>	<b>IM B5</b>
kW		min <sup>-1</sup>	Nm	A	400V	100%	75%		<b>I<sub>n</sub></b>	<b>M<sub>n</sub></b>	<b>M<sub>a</sub></b>	x 10 <sup>-4</sup> kgm <sup>2</sup>	<b>kg</b>		Nm	1/h	kgm <sup>2</sup>	<b>kg</b>		Nm	1/h	kgm <sup>2</sup>	<b>kg</b>
0.75	<b>ME 3SA</b>	6	7.6	1.98	75.9	75	70.7	0.72	4.7	2.2	2	33	17	<b>FD 15</b>	26	3400	28	21	<b>FA 15</b>	26	6500	28	22
1.1	<b>ME 3LA</b>	6 (*)	11.1	2.75	78.1	76.2	73	0.74	4.9	2.2	1.9	82	21	<b>FD 15</b>	26	2700	37	27	<b>FA 15</b>	26	5000	37	28
1.5	<b>ME 3LB</b>	6	15.2	3.8	79.8	77.5	74	0.72	5.6	2.5	2.3	95	23	<b>FD 15</b>	40	1900	86	29	<b>FA 15</b>	40	4100	86	30
2.2	<b>ME 4SA</b>	6	22	4.9	81.8	81.8	80	0.8	5.7	1.9	1.7	216	34	<b>FD 56</b>	75	—	177	47	<b>FA 06</b>	60	2100	177	48
3.7	<b>ME 4LA</b>	6	36.1	8.3	83.5	83.6	81.3	0.76	6.9	2.2	2	383	54	<b>FD 06</b>	100	—	305	70	<b>FA 06</b>	100	1200	305	72




<b>4 P</b>	<b>1800 min<sup>-1</sup> - S1</b>		<b>60 Hz</b>	
	d.c. brake			

P <sub>n</sub> kW	P <sub>n</sub> hp		n min <sup>-1</sup>	M <sub>n</sub> Nm	M <sub>n</sub> lb·in	I <sub>n</sub> 400V A	η%		cos φ	I <sub>s</sub> I <sub>n</sub>	M <sub>s</sub> M <sub>n</sub>	M <sub>s</sub> M <sub>n</sub>	KVA code	J <sub>m</sub> x 10 <sup>-4</sup> kgm <sup>2</sup>	J <sub>m</sub> x 10 <sup>-4</sup> lb·ft <sup>2</sup>	IM B5		Mod	M <sub>b</sub>		Z <sub>0</sub> 1/h	Z <sub>0</sub> NB	Z <sub>0</sub> SB	J <sub>m</sub> x 10 <sup>-4</sup> kgm <sup>2</sup>	J <sub>m</sub> x 10 <sup>-4</sup> lb·ft <sup>2</sup>	IM B5		CE	CE + UL
							100%	75%								50%	kg		lbs	Nm						lb·in	kg		
0.12	0.16	<b>ME05A 4</b>	1700	0.67	5.9	0.41	64.8	62	55	4	3.4	2.8	J	2.3	0.0055	3.6	7.9	<b>FD 02</b>	1.75	15.5	7800	10000	2.9	0.0069	5.3	12	•	•	
0.18	0.25	<b>ME05B 4</b>	1700	1	8.9	0.58	68	67.9	61.2	4.2	4	3.1	J	3.3	0.0078	4.8	10.6	<b>FD 02</b>	3.5	31.0	6500	8400	3.9	0.0093	6.5	14	•	•	
0.25	0.33	<b>ME1SA 4</b>	1700	1.4	12.4	1.04	70	68.3	61.6	5	3.1	3.4	K	5.8	0.0138	4.8	10.6	<b>FD 03</b>	3.5	31.0	9900	14000	6.9	0.0164	7.5	17	•	•	
0.37	0.5	<b>ME1SB 4</b>	1715	2.06	18.2	0.93	72	71.7	66.3	5	3	3.2	J	6.9	0.0164	5.5	12.1	<b>FD 03</b>	5	44.3	6300	9900	8	0.0190	8.2	18	•	•	
0.55	0.75	<b>ME 2SA 4</b>	1740	3	26.6	1.23	75.5	73.1	66.8	8.7	3.8	3.0	N	19	0.0451	9.9	21.8	<b>FD 04</b>	10	88.5	3300	6800	20.6	0.0489	13.8	30	•	•	
0.75	1	<b>ME 2SB 4</b>	1745	4.1	36.3	1.46	82.5	81.1	77.6	7.6	3.5	3.2	K	28	0.0664	12.2	26.9	<b>FD 04</b>	15	133	2300	4600	29.6	0.0702	16.1	36	•	•	
1.1	1.5	<b>ME 3SA 4</b>	1740	6	53.1	2.25	84	82.7	79	7.7	3.5	3.2	J	34	0.0807	15.5	34.2	<b>FD 15</b>	26	230	1700	3400	38	0.0902	22	47	•	•	
1.5	2	<b>ME 3SB 4</b>	1740	8.2	72.6	3.1	84.5	83.9	80.7	7.1	3.6	3.4	K	40	0.0949	17	37.5	<b>FD 15</b>	26	230	1000	2800	44	0.1044	23	51	•	•	
2.2	3	<b>ME 3LA 4</b>	1745	12	106	4.2	87.5	85.5	83.2	7	3.3	2.9	J	54	0.1281	21	46.3	<b>FD 15</b>	40	354	890	2400	58	0.1376	27	60	•	•	
3	4	<b>ME 3LB 4</b>	1735	16.5	146	5.9	87.5	87.7	86.3	7	3.2	2.9	K	61	0.1448	23	50.7	<b>FD 15</b>	40	354	—	1000	65	0.1542	29	64	•	•	
3.7	5	<b>ME 4SA 4</b>	1750	20	177	6.6	87.5	87.5	86.1	0.8	7.8	3.2	J	213	0.5055	42	92.6	<b>FD 56</b>	75	664	—	880	224	0.5316	55	121	•	•	
4	5.4	<b>ME 4SA 4</b>	1790	21.3	189	7.2	87.5	85.5	82.7	0.82	7.2	3.1	H	213	0.5055	42	92.6	<b>FD 56</b>	75	664	—	880	224	0.5316	55	121	•	•	
5.5	7.5	<b>ME 4SB 4</b>	1760	30	266	9.3	89.5	89.5	87.7	0.83	8.7	3.5	K	270	0.6407	51	112	<b>FD 56</b>	75	664	—	880	281	0.6668	64	141	•	•	
7.5	10	<b>ME 4LA 4</b>	1760	43	381	12.7	89.5	89.5	87.9	0.83	8	3.4	K	319	0.7570	57	126	<b>FD 06</b>	100	885	—	700	330	0.7831	70	154	•	•	
9.2	12.5	<b>ME 4LB 4</b>	1760	50	443	15.6	90	90	88.6	0.82	8.3	3.6	K	360	0.8543	65	143	<b>FD 07</b>	150	1328	—	590	382	0.9065	81	179	•	•	
11	15	<b>ME 5SA 4</b>	1765	60	531	18.7	91	91	90	0.81	7.7	2.9	J	650	1.5425	85	187	<b>FD 08</b>	170	1505	—	360	725	1.7205	115	254	•	•	
15	20	<b>ME 5LA 4</b>	1770	81	717	25.5	91	90.5	89.5	0.81	7.1	3.1	J	790	1.8747	101	223	<b>FD 08</b>	200	1770	—	320	865	2.0527	131	289	•	•	



M17 MOTORS DIMENSIONS BE-ME


BE - IM B3

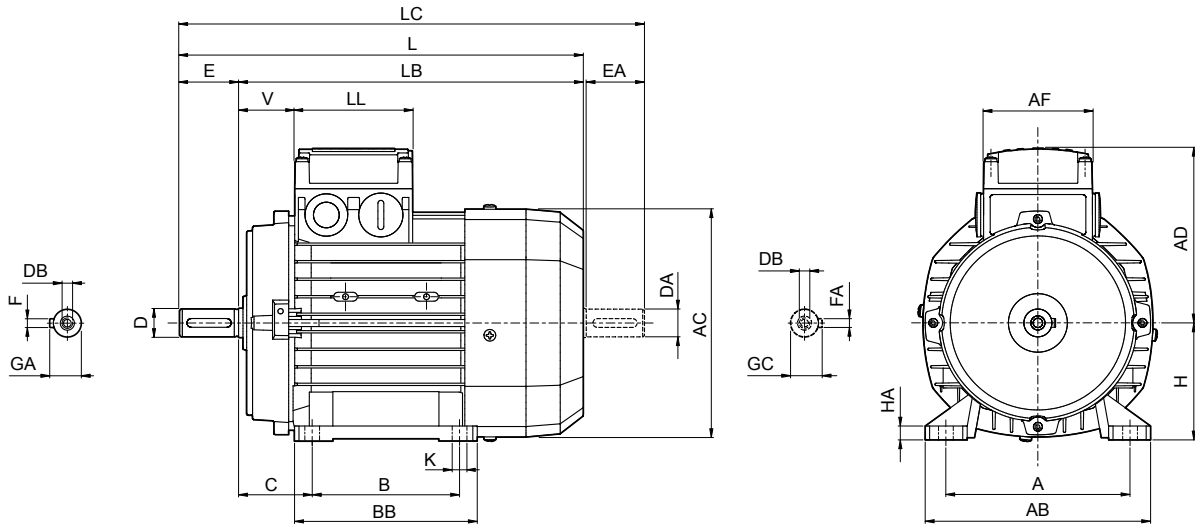


BE-IE2

	Shaft					Housing						Motor											
	D DA	E EA	DB	GA GC	F FA	B	A	HA	BB	AB	K	C	H	AC	L	LB	LC	AD	AF	LL	V		
BE 63	11	23	M4	12.5	4	80	100	8	96	120	7	40	63	121	207	184	232	95	74	80	37		
BE 71	14	30	M5	16	5	90	112		112	135		45	71	138	249	219	281	108					
BE 80	19	40	M6	21.5	6	100	125		124	153	50	80	156	274	234	315	119	38					
BE 90 S	24	50	M8	27	8	125	140	10	155	174	10	56	90	176	326	276	378	133	98	98	44		
BE 90 L						140	190		224	70		112	219	385	325	448	157						
BE 100	28	60	M10	31	8	160	190	10	175	192	12	63	100	195	367	307	429	142	98	98	50		
BE 112						140	190		224	70		112	219	385	325	448	157						
BE 132 S	38	80	M12	41	10	178	216	12	218	254	12	89	132	258	493	413	576	193	118	118	58		
BE 132 MA						178	216		254	89		132	258	493	413	576	193	118				118	58
BE 132 MB						178	216		254	89		132	258	528	448	611	193	118				118	58
BE 160 M	42	110	M16	45	12	210	254	25	264	319	14.5	108	160	310	596	486	680	245	187	187	51		
BE 160 L	38 <sup>(1)</sup>	80 <sup>(1)</sup>	M12 <sup>(1)</sup>	41 <sup>(1)</sup>	10 <sup>(1)</sup>	254	254		304						640	530	724						
BE 180 M	48	110	M16	51.5	14	241	279	26	291	359	14	121	180	348	708	598	823	261	187	187	52		
BE 180 L	42 <sup>(1)</sup>	110 <sup>(1)</sup>	M16 <sup>(1)</sup>	45 <sup>(1)</sup>	12 <sup>(1)</sup>	279	279		329						708	598	823						

N.B.: 1) These values refer to the rear shaft end.




# BE - IM B5

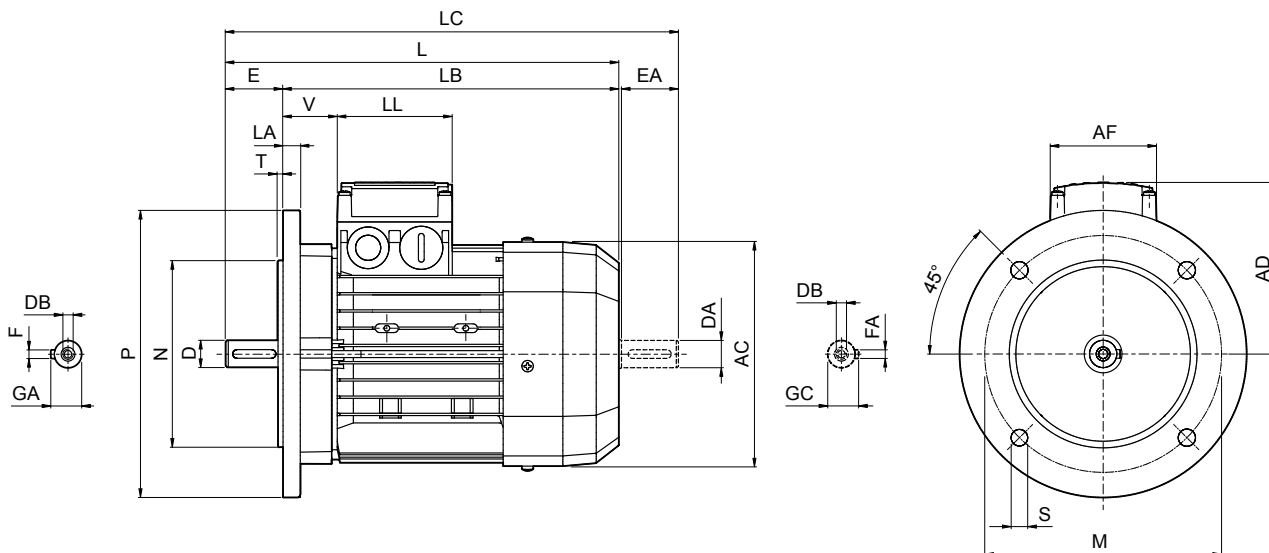


	Shaft					Flange					Motor												
	D DA	E EA	DB	GA GC	F FA	M	N	P	S	T	LA	AC	L	LB	LC	AD	AF	LL	V				
<b>BE 63</b>	11	23	M4	12.5	4	115	95	140	9.5	3	10	121	207	184	232	95	74	80	26				
<b>BE 71</b>	14	30	M5	16	5	130	110	160		108													
<b>BE 80</b>	19	40	M6	21.5	6	165	130	200		11.5	3.5	11.5	156	274	234	315				119	98	98	37
<b>BE 90 S</b>	24	50	M8	27	8				215				180	250	14	195	367	307	429	142			
<b>BE 90 L</b>												176											
<b>BE 100</b>	28	60	M10	31	8	215	180	250	14	195	367	307	429	142	98	98	50						
<b>BE 112</b>																		15	219	385	325	448	157
<b>BE 132 S</b>	38	80	M12	41	10	265	230	300	14	4	20	258	493	413	576	193	118	118	58				
<b>BE 132 MA</b>													528	448	611								
<b>BE 132 MB</b>																							
<b>BE 160 M</b>	42 38 <sup>(1)</sup>	110 80 <sup>(1)</sup>	M16 M12 <sup>(1)</sup>	45 41 <sup>(1)</sup>	12 10 <sup>(1)</sup>	300	250	350	18.5	5	15	310	596	486	680	245	187	187	51				
<b>BE 160 L</b>													640	530	724								
<b>BE 180 M</b>	48 42 <sup>(1)</sup>	110 110 <sup>(1)</sup>	M16 M16 <sup>(1)</sup>	51.5 45 <sup>(1)</sup>	14 12 <sup>(1)</sup>	300	250	350	18.5	5	18	348	708	598	823	261	187	187	52				
<b>BE 180 L</b>																							

N.B.: 1) These values refer to the rear shaft end.




# BE - IM B14

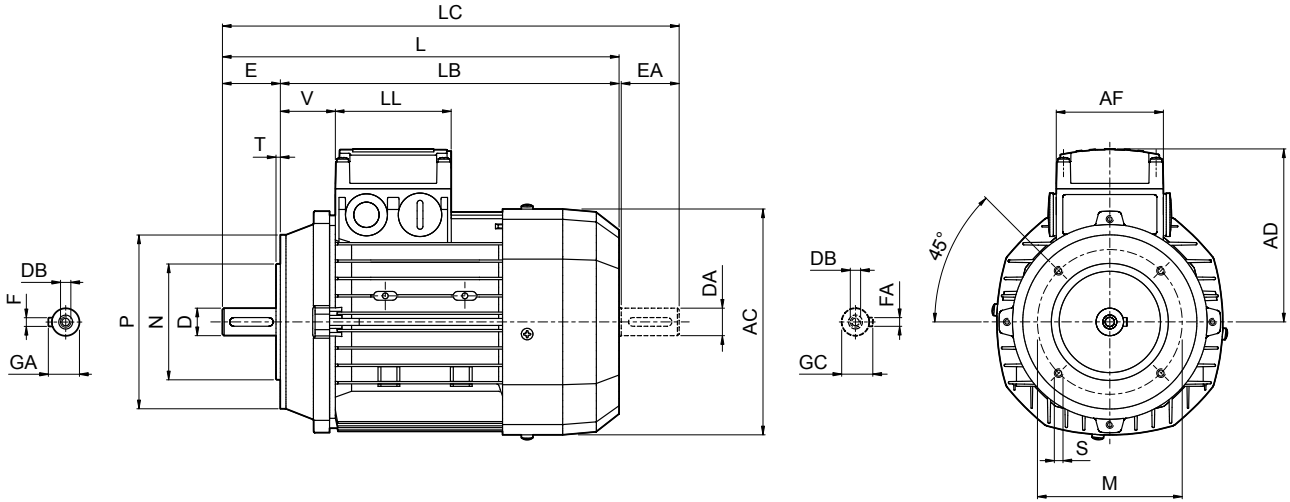


**BE-IE2**

	Shaft					Flange					Motor							
	D DA	E EA	DB	GA GC	F FA	M	N	P	S	T	AC	L	LB	LC	AD	AF	LL	V
<b>BE 63</b>	11	23	M4	12.5	4	75	60	90	M5	2.5	121	207	184	232	95			37
<b>BE 71</b>	14	30	M5	16	5	85	70	105	M6	3	138	249	219	281	108	74	80	38
<b>BE 80</b>	19	40	M6	21.5	6	100	80	120			156	274	234	315	119			
<b>BE 90 S</b>	24	50	M8	27	8	115	95	140	M8		176	326	276	378	133	98	98	44
<b>BE 90 L</b>						130	110	160		195	367	307	429	142	50			
<b>BE 100</b>	28	60	M10	31	8	130	110	160	M8	3.5	219	385	325	448	157			52
<b>BE 112</b>						258	493	413		576	193	118	118	58				
<b>BE 132 S</b>	38	80	M12	41	10	165	130	200	M10	4	258	528	448	611				
<b>BE 132 MA</b>																		
<b>BE 132 MB</b>																		




# BE - IM B3 - FD

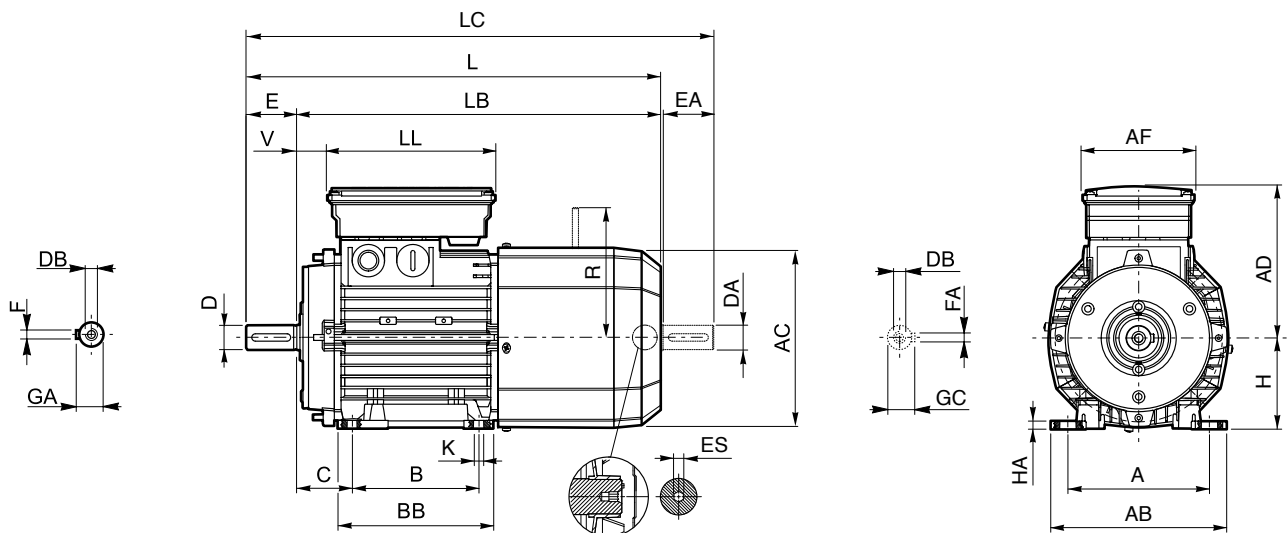


	Shaft					Housing						Motor											
	D DA	E EA	DB	GA GC	F FA	B	A	HA	BB	AB	K	C	H	AC	L	LB	LC	AD	AF	LL	V	R FD	ES <sup>(2)</sup>
BE 63	11	23	M4	12.5	4	80	100		96	120		40	63	121	272	249	297	122			14	96	
BE 71	14	30	M5	16	5	90	112		112	135	7	45	71	138	313	283	345	135	98	133	24	103	5
BE 80	19	40	M6	21.5	6		125	8	124	153		50	80	156	348	308	390	143			25		129
BE 90 S						100					10												
BE 90 L	24	50	M8	27			140		155	174		56	90	176	411	361	463	146			32		
BE 100					8		160	10	175	192		63	100	195	458	398	521	155	110	165	37	160	
BE 112	28	60	M10	31		140	190		224			70	112	219	484	424	547	170			39	199	6
BE 132 S											12				603	523	686					204	
BE 132 MA	38	80	M12	41	10		216	12	218	254		89	132	258				193	140	188	46		
BE 132 MB						178									628	548	711					226	
BE 160 M	42	110	M16	45	12	210			264						736	626	820						
BE 160 L	38 <sup>(1)</sup>	80 <sup>(1)</sup>	M12 <sup>(1)</sup>	41 <sup>(1)</sup>	10 <sup>(1)</sup>	254	25		319	14.5	108	160	310		780	670	864	245			51	266	
BE 180 M	48	110	M16	51.5	14	241			291										187	187			
BE 180 L	42 <sup>(1)</sup>	110 <sup>(1)</sup>	M16 <sup>(1)</sup>	45 <sup>(1)</sup>	12 <sup>(1)</sup>	279	26		329		14	121	180	348	866	756	981	261			52	305	

N.B.: 1) These values refer to the rear shaft end (PS).

2) "ES" hexagon is not present with PS option



# BE - IM B5 - FD

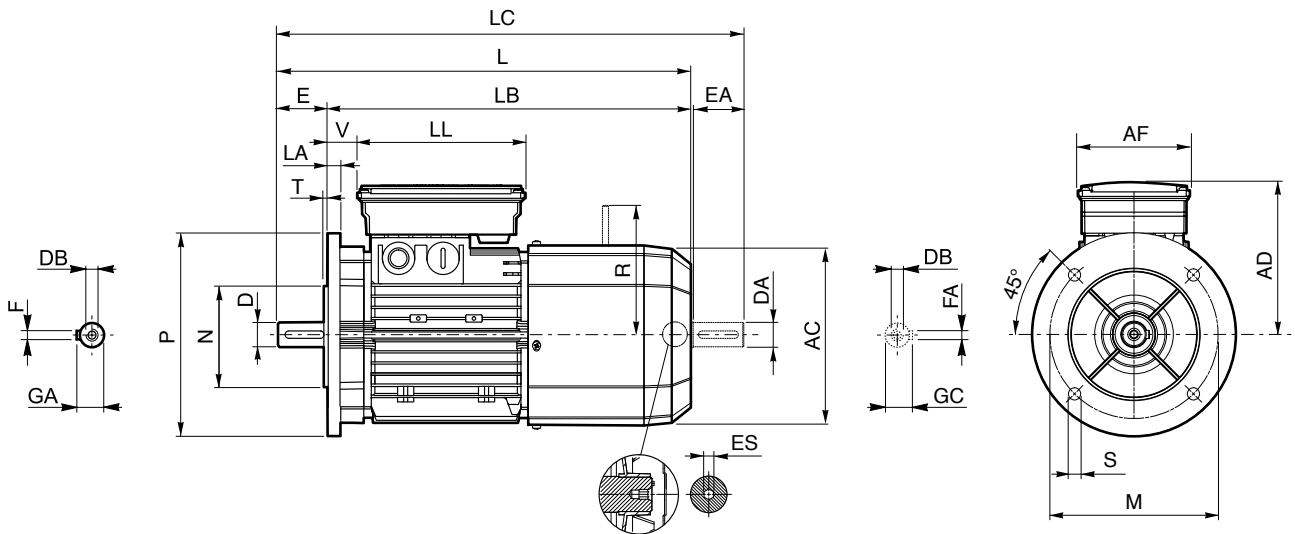


**BE-IE2**


	Shaft					Flange						Motor									
	D DA	E EA	DB	GA GC	F FA	M	N	P	S	T	LA	AC	L	LB	LC	AD	AF	LL	V	R FD	ES <sup>(2)</sup>
BE 63	11	23	M4	12.5	4	115	95	140	9.5	3	10	121	272	249	297	122	98	133	14	96	5
BE 71	14	30	M5	16	5	130	110	160				138	313	283	345				135	24	
BE 80	19	40	M6	21.5	6	165	130	200	11.5	3.5	11.5	156	348	308	390	143	25	129			
BE 90 S	24	50	M8	27	8							176	411	361	463	146	32	160			
BE 90 L						37	199														
BE 100	28	60	M10	31	8	215	180	250	14	4	14	195	458	398	521	155	110	165	37	199	6
BE 112												15	219	484	424	547	170	39			
BE 132 S	38	80	M12	41	10	265	230	300	14	4	20	258	603	523	686	210	140	188	46	204	
BE 132 MA												628	548	711	226						
BE 132 MB												736	626	820	245	51	266				
BE 160 M	42	110	M16	45	12	300	250	350	18.5	5	15	310	780	670	864	245	187	187	52	305	—
BE 160 L	38 <sup>(1)</sup>	80 <sup>(1)</sup>	M12 <sup>(1)</sup>	41 <sup>(1)</sup>	10 <sup>(1)</sup>							780	670	864	51				266		
BE 180 M	48	110	M16	51.5	14	300	250	350	18.5	5	18	348	866	756	981	261	52	305			
BE 180 L	42 <sup>(1)</sup>	110 <sup>(1)</sup>	M16 <sup>(1)</sup>	45 <sup>(1)</sup>	12 <sup>(1)</sup>							780	670	864	51	266					

N.B.: 1) These values refer to the rear shaft end (PS).

2) "ES" hexagon is not present with PS option




## BE - IM B14 - FD

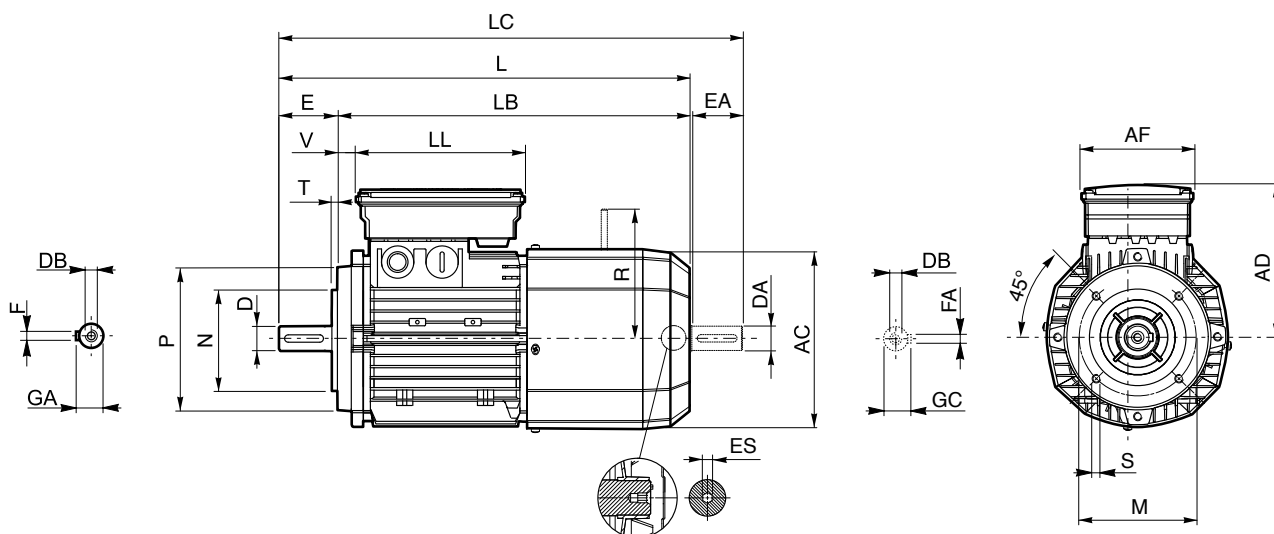


	Shaft					Flange					Motor												
	D DA	E EA	DB	GA GC	F FA	M	N	P	S	T	AC	L	LB	LC	AD	AF	LL	V	R FD	ES <sup>(2)</sup>			
BE 63	11	23	M4	12.5	4	75	60	90	M5	2.5	121	272	249	297	122			14	96				
BE 71	14	30	M5	16	5	85	70	105	M6	3	138	313	283	345	135	98	133	24	103	5			
BE 80	19	40	M6	21.5	6	100	80	120			156	348	308	390	143				25	129			
BE 90 S	24	50	M8	27	8	115	95	140	M8		3.5	176	411	361	463	146	110	165	32	160	6		
BE 90 L																							
BE 100	28	60	M10	31		130	110	160	M8	3.5	195	458	398	521	155				37	199			
BE 112					219						484	424	547	170									
BE 132 S	38	80	M12	41	10	165	130	200	M10	4	258	603	523	686	193	140	188	46	204	—			
BE 132 MA																							
BE 132 MB												628	548	711									

2) "ES" hexagon is not present with PS option




**ME**

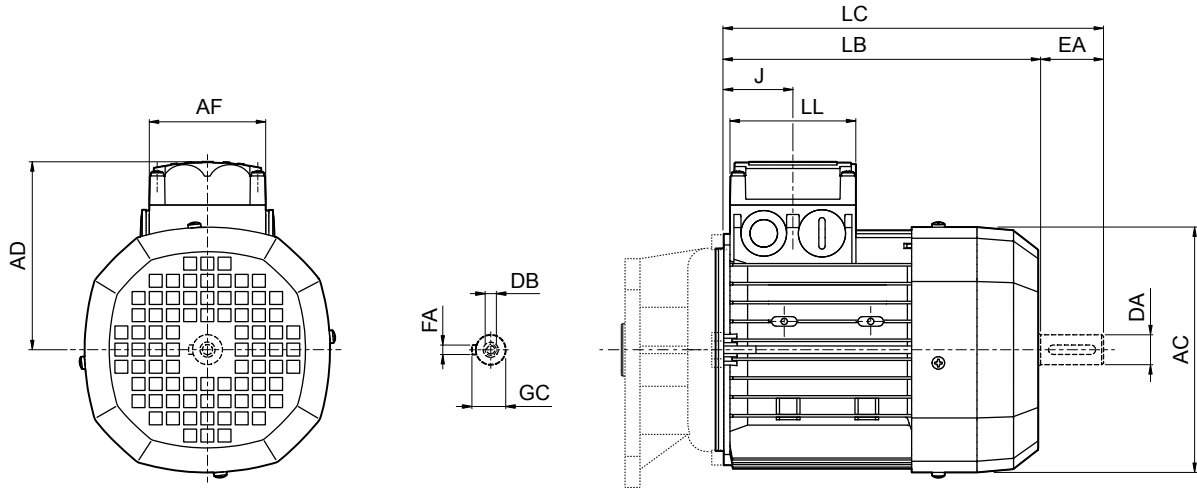


**ME-JE2**

	Rear shaft end					Motor						
	DA	EA	DB	FA	GC	AC	LB	LC	AF	LL	J	AD
<b>ME 05</b>	11	23	M4	12.5	4	121	165	191	74	80	48	95
<b>ME 1S</b>	14	30	M5	16	5	138	187	219			45	108
<b>ME 2S</b>	19	40	M6	21.5	6	156	202	245			44	119
<b>ME 3S</b>	28	60	M10	31	8	195	230	293	98	98	53.5	142
<b>ME 3L</b>							262	325				
<b>ME 4S</b>	38	80	M12	41	10	258	361	444	118	118	64.5	193
<b>ME 4L</b>							396	479				
<b>ME 4LB</b>												
<b>ME 5S</b>	38	80	M12	41	10	310	418	502	187	187	77	245
<b>ME 5L</b>							462	546				




# ME - FD

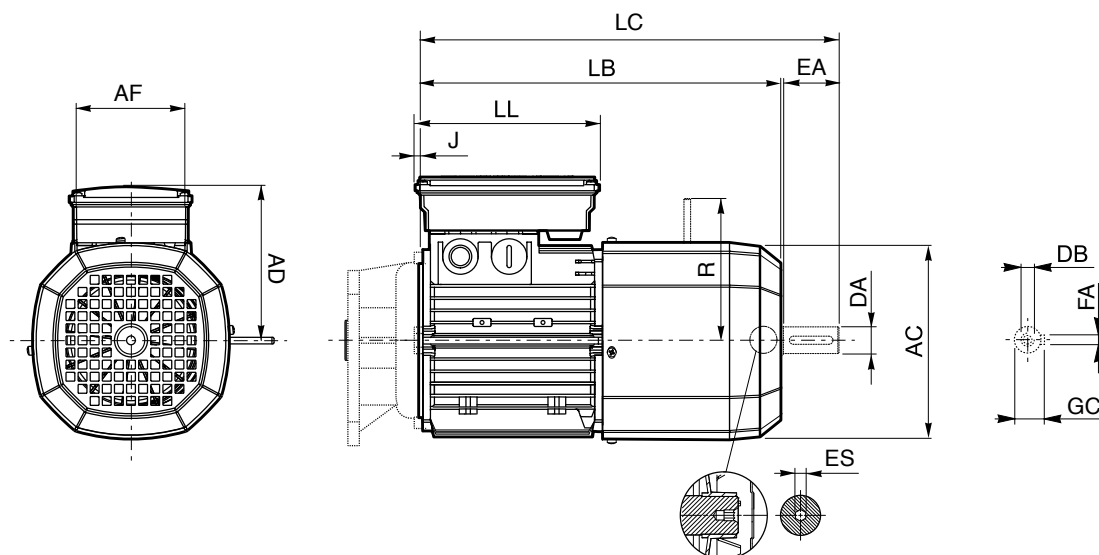


	Rear shaft end					Motor									
	DA	EA	DB	GC	FA	AC	LB	LC	AF	LL	J	AD	R		ES <sup>(1)</sup>
<b>ME 05</b>	11	23	M4	12.5	4	121	231	256			-4.5	119	96	116	5
<b>ME 1S</b>	14	30	M5	16	5	138	248	280	98	133	-8	135	103	124	
<b>ME 2S</b>	19	40	M6	21.5	6	156	272	314			-17	143	129	134	
<b>ME 3S</b>	28	60	M10	31	8	195	326	389	110	165	7	155	160	160	6
<b>ME 3L</b>							353	416							
<b>ME 4S</b>	38	80	M12	41	10	258	470	553	140	188	7	210	204	200	
<b>ME 4LA</b>							495	578					226	217	
<b>ME 4LB</b>															
<b>ME 5S</b>	38	80	M12	41	10	310	558	642	187	187	17	245	266	247	
<b>ME 5L</b>							602	686							


N.B.: 1) "ES" hexagon is not present with PS option




M18 MOTORS DIMENSIONS BN-M

BN-IE1


2P		3000 min <sup>-1</sup> - S1													50 Hz															
P <sub>n</sub> kW	P <sub>n</sub> hp		n min <sup>-1</sup>	M <sub>n</sub> Nm	M <sub>n</sub> lb-in	I <sub>n</sub> 400V A	η%		cosφ	I <sub>a</sub> I <sub>n</sub>	M <sub>s</sub> M <sub>n</sub>	M <sub>a</sub> M <sub>n</sub>	KVA code	J <sub>m</sub> x 10 <sup>-4</sup> kgm <sup>2</sup>	J <sub>m</sub> x 10 <sup>-4</sup> lb-ft <sup>2</sup>	IM B5 kg	IM B5 lbs	d.c. brake				Standard	CUS variant	CE + UL	CCC variant					
							100%	75%										Z <sub>0</sub> 1/h	M <sub>b</sub> Nm	M <sub>b</sub> lb-in	Z <sub>0</sub> NB					Z <sub>0</sub> SB	J <sub>m</sub> kgm <sup>2</sup>	J <sub>m</sub> lb-ft <sup>2</sup>	IM B5 kg	IM B5 lbs
							50%	50%																						
0.18	0.25	BN 63A	2	2730	0.63	5.6	0.56	59.9	51.9	0.77	3	2.1	2.0	0.0048	3.5	7.7	FD 02	1.75	15	3900	4800	2.6	0.0062	5.2	11	•	•			
0.25	0.33	BN 63B	2	2740	0.87	7.7	0.72	66	64.8	0.76	3.3	2.3	2.3	0.0055	3.9	8.6	FD 02	1.75	15	3900	4800	3.0	0.0071	5.6	12	•	•			
0.37	0.5	BN 63C	2	2800	1.26	11.2	0.99	69.1	66.8	0.78	3.9	2.6	2.6	0.0078	5.1	11	FD 02	3.5	31	3600	4500	3.9	0.0093	6.8	15	•	•			
0.37	0.5	BN 71A	2	2820	1.25	11.1	0.95	73.8	70.6	0.76	4.8	2.8	2.6	0.0082	5.4	12	FD 03	3.5	31	3000	4100	4.6	0.0109	8.1	18	•	•			
0.55	0.75	BN 71B	2	2820	1.86	16.5	1.37	76	74.8	0.76	5	2.9	2.8	0.0097	6.2	14	FD 03	5	44	2900	4200	5.3	0.0126	8.9	20	•	•			
0.75	1	BN 71C	2	2810	2.6	23	1.86	76.6	76.2	0.76	5.1	3.1	2.8	0.0119	7.3	16	FD 03	5	44	1900	3300	6.1	0.0145	10	22	•	•			
0.75	1	BN 80A	2	2810	2.6	23	1.75	76.2	75.5	0.81	4.8	2.6	2.2	0.0185	8.6	19	FD 04	5	44	1700	3200	9.4	0.0223	12.5	28	•	•			
1.1	1.5	BN 80B	2	2800	3.8	33.6	2.57	76.4	76.2	0.81	4.8	2.8	2.4	0.0214	9.5	21	FD 04	10	89	1500	3000	10.6	0.0252	13.4	30	•	•			
1.5	2	BN 80C	2	2800	5.1	45	3.4	79.1	79.5	0.81	4.9	2.7	2.4	0.0271	11.3	25	FD 04	15	133	1300	2600	13.0	0.0308	15.2	34	•	•			
1.5	2	BN 90SA	2	2870	5	44	3.4		81.5	0.8	5.9	2.7	2.6	0.0297	12.3	27	FD 14	15	133	900	2200	14.1	0.0335	16.5	36	•	•			
1.85	2.5	BN 90SB	2	2880	6.1	54	4	82.5	82	0.8	6.2	2.9	2.6	0.0397	14	31	FD 14	15	133	900	2200	18.3	0.0434	18.2	40	•	•			
2.2	3	BN 90L	2	2880	7.3	65	4.8	82.7	82.1	0.8	6.3	2.9	2.7	0.0397	14	31	FD 05	26	230	900	2200	21	0.0498	20	44	•	•			
3	4	BN 100L	2	2860	10	89	6.7	81.5	81.3	0.79	5.6	2.6	2.2	0.0736	20	44	FD 15	26	230	700	1600	35	0.0831	26	57	•	•			
4	5.5	BN 100LB	2	2870	13.3	118	8.7	83.1	83	0.8	5.8	2.7	2.5	0.0926	23	51	FD 15	40	354	450	900	43	0.102	29	64	•	•			
4	5.5	BN 112M	2	2900	13.2	117	8.2	85.5	84.5	0.82	6.9	3	2.9	0.135	28	62	FD 06S	40	354	—	950	66	0.157	39	86	•	•			
5.5	7.5	BN 132SA	2	2890	18.2	161	11.2	84.7	84.5	0.84	5.9	2.6	2.2	0.240	35	77	FD 06	50	443	—	600	112	0.266	48	106	•	•			
7.5	10	BN 132SB	2	2900	25	221	14.7	86.5	86.3	0.85	6.4	2.6	2.2	0.318	42	93	FD 06	50	443	—	550	145	0.344	55	121	•	•			
9.2	12.5	BN 132M	2	2930	30	266	17.7	87	86.5	0.86	6.7	2.8	2.3	0.422	53	117	FD 56	75	664	—	430	189	0.449	66	146	•	•			
11	15	BN 160MR	2	2920	36	319	20.6	87.6	87	0.88	6.9	2.9	2.5	0.499	65	143										•	•			
15	20	BN 160MB	2	2930	49	434	28.1	89.6	89.4	0.88	7.1	2.6	2.3	0.808	84	185										•	•			
18.5	25	BN 160L	2	2930	60	531	34	90.4	90.1	0.89	7.6	2.7	2.3	0.998	97	214										•	•			
22	30	BN 180M	2	2930	72	637	40	89.9	89.7	0.88	7.8	2.6	2.4	1.164	109	240										•	•			
30	40	BN 200LA	2	2930	98	867	54	90.7	90.1	0.89	7.8	2.7	2.9	1.40	309											•	•			



4P		1500 min <sup>-1</sup> - S1												50 Hz																								
P <sub>n</sub> kW	P <sub>n</sub> hp	n	M <sub>n</sub> Nm	M <sub>n</sub> lb-in	In A	η%		cosφ	I <sub>s</sub> I <sub>n</sub>	M <sub>s</sub> M <sub>n</sub>	M <sub>s</sub> M <sub>n</sub>	KVA code	J <sub>m</sub> x 10 <sup>-4</sup> kgm <sup>2</sup>	J <sub>m</sub> x 10 <sup>-4</sup> lb-ft <sup>2</sup>	IM B5 kg	IM B5 lbs	Z <sub>0</sub> 1/h	Z <sub>0</sub> 1/h	M <sub>b</sub> Nm	M <sub>b</sub> lb-in	SB	SB	J <sub>m</sub> x 10 <sup>-4</sup> kgm <sup>2</sup>	J <sub>m</sub> x 10 <sup>-4</sup> lb-ft <sup>2</sup>	IM B5 kg	IM B5 lbs	Standard	CUS variant	CE UL	CE UL CCC								
						100%	75%																								50%	CE	UL	CCC				
0.06	0.08	4	0.43	3.8	0.28	46.8	44.2	0.65	2.6	2	H	1.5	0.0036	3.1	6.8																							
0.09	0.12	4	0.64	5.7	0.42	51.7	47.6	0.60	2.6	2.4	H	1.5	0.0036	3.1	6.8																							
0.12	0.16	4	0.85	7.5	0.47	59.8	56.2	0.62	2.6	1.9	F	2	0.0047	3.5	7.7																							
0.18	0.25	4	1.3	11.5	0.71	54.8	52.9	0.67	2.6	2.2	F	2.3	0.0055	3.9	8.6																							
0.25	0.33	4	1.78	15.8	0.8	65.3	65	0.69	2.7	1.9	E	3.3	0.0078	5.1	11																							
0.25	0.33	4	1.73	15.3	0.78	63.7	62.2	0.73	3.3	1.9	F	5.8	0.0138	5.1	11																							
0.37	0.5	4	2.6	23	1.05	66.8	66.7	0.76	3.7	2	F	6.9	0.0164	5.9	13																							
0.55	0.75	4	3.8	33.6	1.55	69	68.9	0.74	4.1	2.3	G	9.1	0.0216	7.3	16																							
0.55	0.75	4	3.8	33.6	1.43	72	71.3	0.77	4.1	2.3	F	15	0.0356	8.2	18																							
0.75	1	4	5.1	45	1.85	75	74.5	0.78	4.9	2.7	H	20	0.0475	9.9	22																							
1.1	1.5	4	7.5	66	2.7	75.5	76.2	0.78	5.1	2.8	H	25	0.0593	11.3	25																							
1.1	1.5	4	7.6	67	2.7	76.5	76.2	0.77	4.6	2.6	G	21	0.0498	12.2	27																							
1.5	2	4	10.2	90	3.6	78.7	78.5	0.77	5.3	2.8	H	28	0.0664	13.6	30																							
1.85	2.5	4	12.7	112	4.3	78.6	78.9	0.79	5.1	2.8	G	30	0.0712	15.1	33																							
2.2	3	4	14.9	132	5.2	81.1	81.4	0.75	4.5	2.2	F	40	0.0949	18	40																							
3	4	4	20	177	6.8	82.6	83.8	0.77	5	2.3	G	54	0.1281	22	49																							
4	5.5	4	27.3	241.5	9	82.7	83.1	0.78	4.7	2.3	F	61	0.1448	24	53																							
4	5.5	4	27	239	8.4	84.4	84.2	0.81	5.6	2.7	G	98	0.2326	30	66																							
5.5	7.5	4	36	319	11.6	84.7	84.8	0.81	5.5	2.3	G	213	0.5055	44	97																							
7.5	10	4	50	443	15.5	86	86.3	0.81	5.7	2.5	H	270	0.6407	53	117																							
9.2	12.5	4	61	540	18.8	88.4	88.6	0.81	5.9	2.7	H	319	0.7570	59	130																							
11	15	4	73	646	22.4	87.6	87.8	0.81	6	2.7	G	360	0.8543	70	154																							
11	15	4	72.4	641.2	22.5	88	88.5	0.81	6.1	2.5	G	479	1.137	73	161																							
15	20	4	98	867	30	88.7	88.5	0.81	6	2.3	G	650	1.542	99	218																							
18.5	25	4	121	1071	37	89.3	89.5	0.81	6.2	2.6	H	790	1.875	115	254																							
22	30	4	144	1275	44	89.9	90	0.80	6.4	2.5	G	1250	2.966	135	298																							
30	40	4	196	1735	59	91.4	91.7	0.80	7.1	2.7	J	1650	3.916	157	346																							





6P		1000 min <sup>-1</sup> - S1														50 Hz														
P <sub>n</sub> kW	hp	n min <sup>-1</sup>	M <sub>n</sub> lb-in	In 400V A	η%		cosφ	I <sub>s</sub> I <sub>n</sub>	M <sub>s</sub> M <sub>n</sub>	M <sub>a</sub> M <sub>n</sub>	KVA code	J <sub>m</sub> x 10 <sup>-4</sup> kgm <sup>2</sup>	IM B5		Mod	M <sub>b</sub> lb-in	Z <sub>0</sub> 1/h	J <sub>m</sub> x 10 <sup>-4</sup> lb-ft <sup>2</sup>	IM B5		Standard	CUS variant	CE + UL	CE + CCC						
					100%	75%							kg	lbs					kg	lbs										
					50%	50%							Nm	in					kgm <sup>2</sup>	lb-ft <sup>2</sup>					Nm	in	kgm <sup>2</sup>	lb-ft <sup>2</sup>	CE	
0.09	0.12	<b>BN 63A</b>	6	880	0.98	8.7	0.6	41	32.9	0.53	2.1	1.8	J	3.4	0.0081	4.6	10	<b>FD 02</b>	3.5	31	9000	14000	4	0.0095	6.3	14	•	•	•	•
0.12	0.16	<b>BN 63B</b>	6	870	1.32	11.7	0.64	45	41.8	0.6	2.1	1.7	G	3.7	0.0088	4.9	11	<b>FD 02</b>	3.5	31	9000	14000	4.3	0.0102	6.6	15	•	•	•	•
0.18	0.25	<b>BN 71A</b>	6	900	1.91	16.9	0.68	55	55.5	0.69	2.6	1.7	F	8.4	0.0199	5.5	12	<b>FD 03</b>	5	44	8100	13500	9.5	0.0225	8.2	18	•	•	•	•
0.25	0.33	<b>BN 71B</b>	6	900	2.7	23.9	0.82	62	58.5	0.71	2.6	1.7	D	10.9	0.0259	6.7	15	<b>FD 03</b>	5	44	7800	13000	12	0.0285	9.4	21	•	•	•	•
0.37	0.5	<b>BN 71C</b>	6	910	3.9	34.5	1.17	66	60	0.69	3	2	E	12.9	0.0306	7.7	17	<b>FD 53</b>	7.5	66	5100	9500	14	0.0332	10.4	23	•	•	•	•
0.37	0.5	<b>BN 80A</b>	6	910	3.9	34.5	1.15	68	67.4	0.68	3.2	2	F	21	0.0498	9.9	22	<b>FD 04</b>	10	89	5200	8500	23	0.0546	13.8	30	•	•	•	•
0.55	0.75	<b>BN 80B</b>	6	920	5.7	50	1.67	70	69.8	0.68	3.9	2.2	G	25	0.0593	11.3	25	<b>FD 04</b>	15	133	4800	7200	27	0.0641	15.2	34	•	•	•	•
0.75	1	<b>BN 80C</b>	6	920	7.8	69	2.38	70	70	0.65	3.8	2.2	G	28	0.0664	12.2	27	<b>FD 04</b>	15	133	3400	6400	30	0.0712	16.1	35	•	•	•	•
0.75	1	<b>BN 90S</b>	6	920	7.8	69	2.27	70	69	0.68	3.8	2.2	G	26	0.0617	12.6	28	<b>FD 14</b>	15	133	3400	6500	28	0.0664	16.8	37	•	•	•	•
1.1	1.5	<b>BN 90L</b>	6	920	11.4	101	3.2	72.9	72.6	0.69	3.9	2	G	33	0.0783	15	33	<b>FD 05</b>	26	230	2700	5000	37	0.0878	21	46	•	•	•	•
1.5	2	<b>BN 100LA</b>	6	940	15.2	135	4	75.2	74.2	0.72	4.1	2	G	82	0.1946	22	49	<b>FD 15</b>	40	354	1900	4100	86	0.2041	28	62	•	•	•	•
1.85	2.5	<b>BN 100LB</b>	6	930	19	168	4.8	76.6	72.8	0.73	4.6	2.1	G	95	0.2254	24	53	<b>FD 15</b>	40	354	1700	3600	99	0.2349	30	66	•	•	•	•
2.2	3	<b>BN 112M</b>	6	940	22	195	5.5	78.5	79	0.73	4.8	2.2	H	168	0.3987	32	71	<b>FD 06S</b>	60	531	—	2100	177	0.4200	42	93	•	•	•	•
3	4	<b>BN 132S</b>	6	940	30	266	7.1	79.7	77	0.76	5.1	1.8	G	216	0.5126	36	79	<b>FD 56</b>	75	664	—	1400	226	0.5363	49	108	•	•	•	•
4	5.5	<b>BN 132MA</b>	6	950	40	354	9.2	81.4	81.5	0.77	5.5	2	H	295	0.7000	45	99	<b>FD 06</b>	100	885	—	1200	305	0.7238	58	128	•	•	•	•
5.5	7.5	<b>BN 132MB</b>	6	945	56	496	12.2	83.1	80.9	0.78	6.1	2.1	H	383	0.9089	56	123	<b>FD 07</b>	150	1328	—	1050	406	0.9635	72	159	•	•	•	•
7.5	10	<b>BN 160M</b>	6	955	75	664	15.7	85	85	0.81	5.9	2.2	H	740	1.7560	83	183	<b>FD 08</b>	170	1505	—	900	815	1.9340	112	247	•	•	•	•
11	15	<b>BN 160L</b>	6	960	109	965	22.7	86.4	86.5	0.81	6.6	2.3	H	970	2.3018	103	227	<b>FD 08</b>	200	1770	—	800	1045	2.4798	133	293	•	•	•	•
15	20	<b>BN 180L</b>	6	970	148	1310	30	87.7	88	0.82	6.2	2.4	H	1550	3.6782	130	287	<b>FD 09</b>	300	2655	—	600	1750	4.1528	170	375	•	•	•	•
18.5	25	<b>BN 200LA</b>	6	960	184	1629	37	88.6	88	0.81	5.9	2	G	1700	4.0342	145	320	<b>FD 09</b>	400	3540	—	450	1900	4.5088	185	408	•	•	•	•




2P		3600 min <sup>-1</sup> - S1													60 Hz												
P <sub>n</sub> kW	hp	P <sub>n</sub> 2	n rmin <sup>-1</sup>	M <sub>n</sub> Nm	M <sub>n</sub> lb-in	In 460V A	η%	cosφ	I <sub>s</sub> I <sub>n</sub>	M <sub>s</sub> M <sub>n</sub>	M <sub>a</sub> M <sub>n</sub>	KVA code	J <sub>m</sub> x 10 <sup>-4</sup> kgm <sup>2</sup>	J <sub>m</sub> x 10 <sup>-4</sup> lb-ft <sup>2</sup>	IM B5 Kg	IM B5 lbs	d.c. brake				Standard	CUS variant					
																	Mod	M <sub>b</sub> Nm	M <sub>b</sub> lb-in	Z <sub>o</sub> 1/h			Z <sub>o</sub> NB	Z <sub>o</sub> SB	J <sub>m</sub> x 10 <sup>-4</sup> kgm <sup>2</sup>	J <sub>m</sub> x 10 <sup>-4</sup> lb-ft <sup>2</sup>	IM B5 Kg
0.18	0.25	BN 63A	2	3360	0.53	4.7	0.55	58	0.74	3.7	2.9	H	2.0	0.0048	3.5	7.7	FD 02	1.75	15	2700	3300	2.6	0.0062	5.2	11	•	•
0.25	0.33	BN 63B	2	3370	0.70	6.2	0.69	61	0.73	4.2	2.9	H	2.3	0.0055	3.9	8.6	FD 02	1.75	15	2700	3300	3.0	0.0071	5.6	12	•	•
0.37	0.5	BN 63C	2	3430	1.03	9.1	0.88	70	0.75	5.5	3.3	J	3.3	0.0078	5.1	11	FD 02	3.50	30	2500	3000	3.9	0.0093	6.8	15	•	•
0.37	0.5	BN 71A	2	3420	1.04	9.2	0.86	71	0.77	5.8	3.1	J	3.5	0.0082	5.4	12	FD 03	3.50	30	2400	3200	4.6	0.0109	8.1	18	•	•
0.55	0.75	BN 71B	2	3450	1.55	13.7	1.23	76	0.75	6.2	3.4	K	4.1	0.0097	6.2	14	FD 03	5	44	2200	2700	5.3	0.0126	8.9	20	•	•
0.75	1	BN 71C	2	3440	2.08	18.4	1.62	77	0.75	6.2	3.5	K	5.0	0.0119	7.3	16	FD 03	5	44	1500	2100	6.1	0.0145	10	22	•	•
0.75	1	BN 80A	2	3440	2.1	18.3	1.62	76	0.76	5.9	3.1	J	7.8	0.0185	8.6	19	FD 04	5	44	1400	1700	9.4	0.0223	12.5	28	•	•
1.1	1.5	BN 80B	2	3430	3.1	27.6	2.4	77	0.76	6.2	3.8	J	9.0	0.0214	9.5	21	FD 04	10	88	1200	1600	10.6	0.0252	13.4	30	•	•
1.5	2	BN 80C	2	3415	4.2	37.2	2.9	81	0.79	6.8	3	J	11.4	0.0271	11.3	25	FD 04	15	133	1000	1300	13.0	0.0308	15.2	34	•	•
1.5	2	BN 90SA	2	3480	4.1	36.2	3.04	79	0.78	7.3	3.6	K	12.5	0.0297	12.2	27	FD 14	15	133	750	1000	14.1	0.0335	16.5	36	•	•
1.85	2.5	BN 90SB	2	3500	5.0	44.3	3.63	80	0.79	8.5	4.2	L	16.7	0.0397	14.1	31	FD 14	15	133	750	1000	18.3	0.0434	18.2	40	•	•
2.2	3	BN 90L	2	3490	6.1	54	4.4	81	0.79	7.3	3.8	K	16.7	0.0397	14.1	31	FD 05	26	230	750	1000	21.0	0.0498	20	44	•	•
3	4	BN 100L	2	3470	8.3	73.5	5.9	79	0.81	7.6	3.7	L	31.0	0.0736	20	44	FD 15	40	354	452	611	35.0	0.0831	26	57	•	•
3.7	5	BN 100LB	2	3490	10.2	90	6.7	84	0.83	6.7	2.9	J	39.0	0.0926	23	51	FD 15	40	354	360	500	43.0	0.102	29	64	•	•
4	5.4	BN 100LB	2	3460	11.0	97.4	7.4	83	0.82	7.9	4	K	39.0	0.0926	23	51	FD 15	40	354	360	500	43.0	0.102	29	64	•	•
3.7	5	BN 112M	2	3540	10.0	88.5	6.7	86.6	0.80	10.4	4.1	M	57.0	0.135	28	62	FD 06S	40	354	280	450	66.0	0.157	39	86	•	•
4	5.4	BN 112M	2	3530	10.8	95.6	7.2	85.7	0.83	9.7	3.8	M	57.0	0.135	28	62	FD 06S	40	354	280	450	66.0	0.157	39	86	•	•
5.5	7.5	BN 132SA	2	3490	15.3	135	9.8	83	0.86	6.4	2.7	H	101.0	0.240	35	77	FD 06	50	440	—	400	112	0.266	48	106	•	•
7.5	10	BN 132SB	2	3490	20.5	181	13	82	0.88	6.2	2.8	H	134.0	0.318	42	93	FD 06	50	440	—	350	145	0.344	55	121	•	•
9.2	11	BN 132M	2	3530	24.9	220.4	15.5	87	0.86	7.7	3	K	178.0	0.422	53	117	FD 06	75	664	—	280	189	0.449	66	146	•	•
11	15	BN 160MR	2	3510	30.6	271	18.3	87	0.88	6.9	2.7	H	210.0	0.499	65	143	BN 160MR	—	—	—	—	—	—	—	—	•	•
15	20	BN 160MB	2	3510	40.6	359	24.2	86	0.9	6	2.5	G	340.0	0.808	84	185	BN 160MB	—	—	—	—	—	—	—	—	•	•
18.5	25	BN 160L	2	3520	50.7	449	29.2	88	0.91	6.9	2.8	H	420.0	0.998	97	214	BN 160L	—	—	—	—	—	—	—	—	•	•
22	30	BN 180M	2	3520	60.7	537	35.1	88	0.91	6.9	2.8	H	490.0	1.164	109	240	BN 180M	—	—	—	—	—	—	—	—	•	•
30	40	BN 200LA	2	3530	80.9	716	46.2	89	0.91	6.9	2.6	H	770.0	1.829	140	309	BN 200LA	—	—	—	—	—	—	—	—	•	•







2P		3000 min <sup>-1</sup> - S1														50 Hz														
P <sub>n</sub> kW	P <sub>n</sub> hp		n min <sup>-1</sup>	M <sub>n</sub> Nm	M <sub>n</sub> lb-in	In 400V A	η%		cosφ	I <sub>a</sub> I <sub>n</sub>	M <sub>a</sub> M <sub>n</sub>	M <sub>a</sub> M <sub>n</sub>	KVA code	J <sub>m</sub> x 10 <sup>-4</sup> kgm <sup>2</sup>	J <sub>m</sub> x 10 <sup>-4</sup> lb-ft <sup>2</sup>	IM B5 kg	IM B5 lbs	Z <sub>0</sub> 1/h		M <sub>b</sub> Nm	M <sub>b</sub> lb-in	SB	J <sub>m</sub> x 10 <sup>-4</sup> kgm <sup>2</sup>	J <sub>m</sub> x 10 <sup>-4</sup> lb-ft <sup>2</sup>	IM B5 kg	IM B5 lbs	Standard	CUS variant	CE + UL	CE + CCC
							100%	75%										NB	SB											
0.18	0.25	<b>M 05A 2</b>	2730	0.63	5.6	0.56	59.9	51.9	0.77	3.00	2.10	2.00	F	2.0	0.0047	3.2	7.1	FD 02	1.75	15	3900	4800	2.6	0.0062	4.9	11	•	•	•	•
0.25	0.33	<b>M 05B 2</b>	2740	0.87	7.7	0.72	66.0	64.8	0.76	3.30	2.30	2.30	D	2.3	0.0055	3.6	7.9	FD 02	1.75	15	3900	4800	3	0.0071	5.3	12	•	•	•	•
0.37	0.5	<b>M 05C 2</b>	2800	1.26	11.2	0.99	69.1	66.8	0.78	3.90	2.60	2.60	A	3.3	0.0078	4.8	11	FD 02	3.5	31	3600	4500	3.9	0.0093	6.5	14	•	•	•	•
0.55	0.75	<b>M 1SD 2</b>	2820	1.86	16.5	1.37	76.0	74.8	0.76	5.00	2.90	2.80	A	4.1	0.0097	5.8	13	FD 03	5	44	2900	4200	5.3	0.0126	8.5	19	•	•	•	•
0.75	1	<b>M 1LA 2</b>	2810	2.6	23	1.86	76.6	76.2	0.76	5.10	3.10	2.80	J	5	0.0119	6.9	15	FD 03	5	44	1900	3300	6.1	0.0145	9.6	21	•	•	•	•
1.1	1.5	<b>M 2SA 2</b>	2800	3.8	33.6	2.57	76.4	76.2	0.81	4.80	2.80	2.40	H	9	0.0214	8.8	19	FD 04	10	89	1500	3000	10.6	0.0252	12.7	26	•	•	•	•
1.5	2	<b>M 2SB 2</b>	2800	5.1	45	3.4	79.1	79.5	0.81	4.90	2.70	2.40	F	11.4	0.0271	10.6	23	FD 04	15	133	1300	2600	13	0.0308	14.5	22	•	•	•	•
2.2	3	<b>M 3SA 2</b>	2880	7.3	65	4.8	82.7	82.1	0.8	6.30	2.90	2.70	K	24	0.0570	15.5	34	FD 15	26	230	1100	2400	28	0.0664	22	49	•	•	•	•
3	4	<b>M 3LA 2</b>	2860	10	89	6.7	81.5	81.3	0.79	5.60	2.60	2.20	J	31	0.0736	18.7	41	FD 15	26	230	700	1600	35	0.0831	25	55	•	•	•	•
4	5.5	<b>M 3LB 2</b>	2870	13.3	118	8.7	83.1	83.0	0.8	5.80	2.70	2.50	A	39	0.0925	22	49	FD 15	40	354	450	900	43	0.1020	28	62	•	•	•	•
5.5	7.5	<b>M 4SA 2</b>	2890	18.2	161	11.2	84.7	84.5	0.84	5.90	2.60	2.20	H	101	0.2397	33	73	FD 06	50	443	—	600	112	0.2658	46	101	•	•	•	•
7.5	10	<b>M 4SB 2</b>	2900	25	221	14.7	86.5	86.3	0.85	6.40	2.60	2.20	J	134	0.3180	40	88	FD 06	50	443	—	550	145	0.3441	53	117	•	•	•	•
9.2	12.5	<b>M 4LA 2</b>	2930	30	266	17.7	87.0	86.5	0.86	6.70	2.80	2.30	J	178	0.4224	51	112	FD 06	75	664	—	430	189	0.4485	64	141	•	•	•	•
11	15	<b>M 4LC 2</b>	2920	36	319	20.6	87.6	87.0	0.88	6.90	2.90	2.50	J	210	0.4983	60	132	FD 56	75	664	—	—	—	—	—	—	•	•	•	•
15	20	<b>M 5SB 2</b>	2930	49	434	28.1	89.6	89.4	0.86	7.10	2.60	2.30	J	340	0.8068	70	154	FD 56	75	664	—	—	—	—	—	—	•	•	•	•
18.5	25	<b>M 5SC 2</b>	2930	60	531	34	90.4	90.1	0.86	7.60	2.70	2.30	K	420	0.9967	83	183	FD 56	75	664	—	—	—	—	—	—	•	•	•	•
22	30	<b>M 5LA 2</b>	2930	72	637	40	89.9	89.7	0.88	7.80	2.60	2.40	K	490	1.1628	95	209	FD 56	75	664	—	—	—	—	—	—	•	•	•	•








6P		1000 min <sup>-1</sup> - S1												50 Hz																						
P <sub>n</sub> kW	hp	n min <sup>-1</sup>	M <sub>n</sub> Nm	In 400V A	η%		cosφ	I <sub>s</sub> I <sub>n</sub>	M <sub>s</sub> M <sub>n</sub>	M <sub>a</sub> M <sub>n</sub>	KVA code	J <sub>m</sub> x 10 <sup>-4</sup> kgm <sup>2</sup>	J <sub>m</sub> x 10 <sup>-4</sup> lb-ft <sup>2</sup>	IM B5 kg	IM B5 lbs	Z <sub>0</sub> 1/h		J <sub>m</sub> x 10 <sup>-4</sup> kgm <sup>2</sup>	J <sub>m</sub> x 10 <sup>-4</sup> lb-ft <sup>2</sup>	IM B5 kg	IM B5 lbs	Mod	M <sub>b</sub> Nm	M <sub>b</sub> lb-in	NB	SB	CE	Standard	CUS variant	CE + UL	CCC variant					
					100%	75%										NB	SB																			
0.09	0.12	<b>M 05A 6</b>	0.98	8.7	0.6	41	32.9	0.53	2.1	1.8	J	3.4	0.0081	4.3	9.5	FD 02	3.5	31	9000	14000	4	0.0095	6	13	•	•	•	•	•	•	•	•				
0.12	0.16	<b>M 05B 6</b>	1.32	11.7	0.64	45	41.8	0.6	2.1	1.7	F	3.7	0.0088	4.6	10	FD 02	3.5	31	9000	14000	4.3	0.0102	6.3	14	•	•	•	•	•	•	•	•				
0.18	0.25	<b>M 15C 6</b>	1.91	16.9	0.68	55	55.5	0.69	2.6	1.7	A	8.4	0.0199	5.1	11	FD 03	5	44	8100	13500	9.5	0.0225	7.8	17	•	•	•	•	•	•	•	•	•			
0.25	0.33	<b>M 15D 6</b>	2.7	23.9	0.82	62	58.5	0.71	2.6	1.7	D	10.9	0.0259	6.3	14	FD 03	5	44	7800	13000	12	0.0285	9	20	•	•	•	•	•	•	•	•	•			
0.37	0.5	<b>M 15A 6</b>	3.9	34.5	1.17	66	60	0.69	3	2	B	12.9	0.0306	7.3	16	FD 53	7.5	66	5100	9500	14	0.0332	10	22	•	•	•	•	•	•	•	•	•			
0.55	0.75	<b>M 25A 6</b>	5.7	50	1.67	70	69.8	0.68	3.9	2.2	G	25	0.0593	10.6	23	FD 04	15	133	4800	7200	27	0.0641	14.5	32	•	•	•	•	•	•	•	•	•	•		
0.75	1	<b>M 25B 6</b>	7.8	69	2.38	70	64.4	0.65	3.8	2.2	A	28	0.0664	11.5	25	FD 04	15	133	3400	6400	30	0.0712	15.4	34	•	•	•	•	•	•	•	•	•	•		
1.1	1.5	<b>M 35A 6</b>	11.4	101	2.9	75	74	0.72	4.3	2	G	62	0.1470	17	37	FD 15	26	230	2700	5000	66	0.1571	23	51	•	•	•	•	•	•	•	•	•	•		
1.5	2	<b>M 35A 6</b>	15.2	135	4	75.2	74.2	0.72	4.1	2	D	82	0.1946	21	46	FD 15	40	354	1900	4100	86	0.2041	27	60	•	•	•	•	•	•	•	•	•	•	•	
1.85	2.5	<b>M 35B 6</b>	19	168	4.8	76.6	72.8	0.73	4.6	2.1	A	95	0.2254	23	51	FD 15	40	354	1700	3600	99	0.2349	29	64	•	•	•	•	•	•	•	•	•	•	•	•
2.2	3	<b>M 35C 6</b>	23	204	5.8	77.7	76.8	0.71	4.7	2.1	G	95	0.2254	23	51	FD 55	55	487	—	1900	99	0.2349	29	64	•	•	•	•	•	•	•	•	•	•	•	
3	4	<b>M 45A 6</b>	30	266	7.1	79.7	77	0.76	5.1	1.9	G	216	0.5126	34	75	FD 56	75	664	—	1400	226	0.5363	47	104	•	•	•	•	•	•	•	•	•	•	•	
4	5.5	<b>M 45A 6</b>	40	354	9.2	81.4	81.5	0.77	5.5	2	A	295	0.7000	43	95	FD 06	100	885	—	1200	305	0.7238	56	123	•	•	•	•	•	•	•	•	•	•	•	
5.5	7.5	<b>M 45B 6</b>	56	496	12.2	83.1	80.9	0.78	6.1	1.9	H	383	0.9089	54	119	FD 07	150	1328	—	1050	406	0.9635	70	154	•	•	•	•	•	•	•	•	•	•	•	
7.5	10	<b>M 55A 6</b>	75	664	15.7	85	84.8	0.81	5.9	2.2	H	740	1.7560	69	152	FD 08	170	1505	—	900	815	1.9340	98	216	•	•	•	•	•	•	•	•	•	•	•	
11	15	<b>M 55B 6</b>	109	965	22.7	86.4	86.5	0.81	6.6	2.3	H	970	2.3018	89	196	FD 08	200	1770	—	800	1045	2.4798	119	262	•	•	•	•	•	•	•	•	•	•	•	



2P		3600 min <sup>-1</sup> - S1														60 HZ											
P <sub>n</sub> kW	P <sub>n</sub> hp		n min <sup>-1</sup>	M <sub>n</sub> Nm	I <sub>n</sub> 460V A	η% 100%	cosφ	I <sub>a</sub> I <sub>n</sub>	M <sub>a</sub> M <sub>n</sub>	M <sub>s</sub> M <sub>n</sub>	KVA code	J <sub>m</sub> x 10 <sup>-4</sup> kgm <sup>2</sup>	J <sub>m</sub> x 10 <sup>-4</sup> lb-ft <sup>2</sup>	IM B5		Mod	M <sub>b</sub> Nm	M <sub>b</sub> lb-in	Z <sub>0</sub> 1/h		J <sub>m</sub> x 10 <sup>-4</sup> kgm <sup>2</sup>	J <sub>m</sub> x 10 <sup>-4</sup> lb-ft <sup>2</sup>	IM B5		Standard	CUS variant	
														kg	lbs				NB	SB			kg	lbs			
														FD					FD								
0.18	0.25	<b>M 05A 2</b>	3380	0.53	4.7	58	0.74	4.1	2.4	3	H	2.0	0.0048	3.2	7.1	<b>FD 02</b>	1.75	15	2700	3300	2.6	0.0062	4.9	11	CE	•	
0.25	0.33	<b>M 05B 2</b>	3370	0.70	6.2	61	0.73	4.9	2.9	3.2	K	2.3	0.0055	3.6	7.9	<b>FD 02</b>	1.75	15	2700	3300	3.0	0.0071	5.3	12	CE	•	
0.37	0.5	<b>M 05C 2</b>	3430	1.04	9.2	69	0.76	5.5	3.2	3.3	J	3.3	0.0078	4.8	10.6	<b>FD 02</b>	3.5	30	2500	3000	3.9	0.0093	6.5	14	CE	•	
0.55	0.75	<b>M 1SD 2</b>	3450	1.55	13.7	76	0.75	6.2	3.4	3.4	K	4.1	0.0097	5.8	12.8	<b>FD 03</b>	5	44	2200	2700	5.3	0.0126	8.5	19	CE	•	
0.75	1	<b>M 1LA 2</b>	3440	2.07	18.3	77	0.75	6.2	3.5	3.5	K	5.0	0.0119	6.9	15.2	<b>FD 03</b>	5	44	1500	2100	6.1	0.0145	9.5	21	CE	•	
1.1	1.5	<b>M 2SA 2</b>	3430	3.12	27.6	77	0.76	6.2	2.9	3.8	J	9.0	0.0214	8.8	19.4	<b>FD 04</b>	10	88	1200	1600	10.6	0.0252	12.7	28	CE	•	
1.5	2	<b>M 2SB 2</b>	3415	4.16	36.8	80	0.79	6	3.3	2.9	H	11.4	0.0271	10.4	23	<b>FD 04</b>	15	133	1000	1300	13.0	0.0309	14.5	32	CE	•	
2.2	3	<b>M 3SA 2</b>	3430	6.21	55	81	0.83	6	2.4	3.2	H	24.0	0.0570	15.4	34	<b>FD 15</b>	26	230	800	1000	28.0	0.0665	22	49	CE	•	
3	4	<b>M 3LA 2</b>	3470	8.3	73.5	79	0.81	7.6	3.7	4	K	31.0	0.0736	18.7	34	<b>FD 15</b>	40	354	450	600	35.0	0.0831	25	55	CE	•	
3.7	5	<b>M 3LB 2</b>	3490	10.4	92	84	0.83	6.7	2.9	3.2	J	39.0	0.0926	22	49	<b>FD 15</b>	40	354	360	500	43.0	0.102	28	62	CE	•	
4	5.4	<b>M 3LB 2</b>	3460	11.0	97.4	83	0.82	7.9	4	3.6	K	39.0	0.0926	22	49	<b>FD 15</b>	40	354	360	500	43.0	0.102	28	62	CE	•	
5.5	7.5	<b>M 4SA 2</b>	3490	15.3	135	83	0.86	6.4	2.7	2.6	H	101	0.2400	33	72	<b>FD 06</b>	50	440	—	400	112.0	0.266	46	101	CE	•	
7.5	10	<b>M 4SB 2</b>	3490	20.5	181	82	0.88	6.2	2.8	2.7	H	134	0.318	40	88	<b>FD 06</b>	50	440	—	350	145.0	0.344	53	117	CE	•	
9.2	12.5	<b>M 4LA 2</b>	3530	24.9	220	87	0.86	7.7	3	2.9	K	178	0.422	51	112	<b>FD 56</b>	75	664	—	280	189.0	0.449	64	141	CE	•	
11	15	<b>M 4LC 2</b>	3510	30.6	271	87	0.88	6.9	2.7	2.9	H	210	0.499	60	132											CE	•
15	20	<b>M 5SB 2</b>	3510	40.6	359	86	0.9	6	2.5	2.8	G	340	0.808	70	154											CE	•
18.5	25	<b>M 5SC 2</b>	3520	50.7	449	88	0.91	6.9	2.8	2.7	H	420	0.998	83	183											CE	•
22	30	<b>M 5LA 2</b>	3520	60.7	537	88	0.91	6.9	2.8	2.8	H	490	1.164	95	209											CE	•




4P		1800 min <sup>-1</sup> - S1																60 Hz												
P <sub>n</sub> kW	P <sub>n</sub> hp		n min <sup>-1</sup>	M <sub>n</sub> Nm	In 460V A	η% 100%	cosφ	I <sub>s</sub> I <sub>n</sub>	M <sub>s</sub> M <sub>n</sub>	M <sub>a</sub> M <sub>n</sub>	KVA code	J <sub>m</sub> x 10 <sup>-4</sup> kgm <sup>2</sup>	J <sub>m</sub> x 10 <sup>-4</sup> lb-ft <sup>2</sup>	IM B5		IM B5		Z <sub>0</sub> 1/h	M <sub>b</sub> Nm	M <sub>b</sub> lb-in	FD		Z <sub>0</sub> 1/h	J <sub>m</sub> x 10 <sup>-4</sup> kgm <sup>2</sup>	J <sub>m</sub> x 10 <sup>-4</sup> lb-ft <sup>2</sup>	IM B5 kg	IM B5 lbs	Standard	CUS variant	
														kg	lbs	kg	lbs													
														Mod	Mod	NB	SB													
0.09	0.12	<b>M 0B 4</b>	1670	0.51	4.5	0.37	59	0.52	2.8	2.9	3	1.5	0.0036	2.9	6.4	2.9	6.4	—	1.75	15	—	—	—	—	—	—	—	—	—	•
0.12	0.16	<b>M 05A 4</b>	1690	0.68	6	0.43	60	0.57	3.1	2.4	2.3	2.0	0.0048	3.2	7.1	3.2	7.1	7000	1.75	15	7000	9000	2.6	0.0062	4.9	11	•	•	•	
0.18	0.25	<b>M 05B 4</b>	1670	1.06	9.4	0.65	58	0.6	3.2	2.8	2.4	2.3	0.0055	3.6	7.9	3.6	7.9	7000	3.5	30	7000	9000	3.0	0.0071	5.3	12	•	•	•	
0.25	0.33	<b>M 05C 4</b>	1670	1.40	12.4	0.77	64	0.65	3.3	2.5	2.4	3.3	0.0078	4.8	10.6	4.8	10.6	6000	3.5	30	6000	8000	3.9	0.0093	6.5	14	•	•	•	
0.37	0.5	<b>M 1SD 4</b>	1700	2.09	18.5	0.96	66	0.73	4.5	2.6	2.4	6.9	0.0164	5.5	12.1	5.5	12.1	4800	5.0	44	4800	7500	8.0	0.019	8.2	18	•	•	•	
0.55	0.75	<b>M 1LA 4</b>	1710	3.12	27.6	1.37	72	0.7	4.9	3	2.8	9.1	0.0216	6.9	15.2	6.9	15.2	3400	7.5	66	3400	7000	10.2	0.0242	9.5	21	•	•	•	
0.75	1	<b>M 2SA 4</b>	1720	4.14	36.6	1.61	78	0.75	6.2	3.4	3.1	20.0	0.0475	9.1	20	9.1	20	3000	15	133	3000	6000	22.0	0.0523	13.2	29	•	•	•	
1.1	1.5	<b>M 2SB 4</b>	1720	6.21	55	2.33	78	0.76	6.3	3.4	3	25	0.0594	10.4	23	25	0.0594	10.4	15	133	2000	27.0	0.0641	14.5	32	•	•	•		
1.5	2	<b>M 3SA 4</b>	1720	8.25	73	3.15	82	0.73	5.7	2.9	2.6	34.0	0.0808	15.4	34	34.0	0.0808	15.4	26	230	1500	38.0	0.0903	22	49	•	•	•		
2.2	3	<b>M 3LA 4</b>	1720	12.4	110	4.67	81	0.73	5.5	2.7	2.4	40.0	0.0960	16.8	37	40.0	0.0960	16.8	40	354	1000	44.0	0.105	24	53	•	•	•		
3	4	<b>M 3LB 4</b>	1720	16.7	147.8	6.2	82.6	0.74	5.6	2.3	2.2	54.0	0.128	21	46	54.0	0.128	21	40	354	600	58.0	0.138	27	60	•	•	•		
3.7	5	<b>M 3LC 4</b>	1730	20.6	182	7.5	84	0.74	5.6	2.8	2.9	61.0	0.145	23	51	61.0	0.145	23	55	480	—	65.0	0.154	29	64	•	•	•		
4	5.4	<b>M 3LC 4</b>	1710	22.3	197.4	7.9	84	0.76	5.4	2.7	2.8	61.0	0.145	23	51	61.0	0.145	23	55	480	—	65.0	0.154	29	64	•	•	•		
5.5	7.5	<b>M 4SA 4</b>	1730	30.8	273	9.8	84	0.84	6.3	2.9	2.6	213.0	0.506	42	93	213.0	0.506	42	75	664	—	223.0	0.53	55	121	•	•	•		
7.5	10	<b>M 4LA 4</b>	1740	40.9	362	13.2	85	0.84	6.1	2.9	2.9	270.0	0.641	51	112	270.0	0.641	51	100	885	—	280.0	0.665	64	141	•	•	•		
9.2	12.5	<b>M 4LB 4</b>	1750	50.2	444.3	16.5	87	0.81	6.8	2.7	2.5	319.0	0.757	57	126	319.0	0.757	57	150	1328	—	342.0	0.812	73	161	•	•	•		
11	15	<b>M 4LC 4</b>	1740	61.4	543	19.4	88	0.81	6.5	3.1	3	360.0	0.855	65	143	360.0	0.855	65	150	1328	—	382.0	0.907	81	179	•	•	•		
15	20	<b>M 5SB 4</b>	1750	81.4	720	24.9	90	0.84	5.8	2.3	2.5	650.0	1.544	85	187	650.0	1.544	85	200	1770	—	725.0	1.7202	115	254	•	•	•		
18.5	25	<b>M 5LA 4</b>	1760	101	895	31.1	90	0.83	5.8	2.5	3	790.0	1.876	101	223	790.0	1.876	101	250	2210	—	865.0	2.054	131	289	•	•	•		



**M19 MOTORS DIMENSIONS BN-M**


**BN - IM B3**

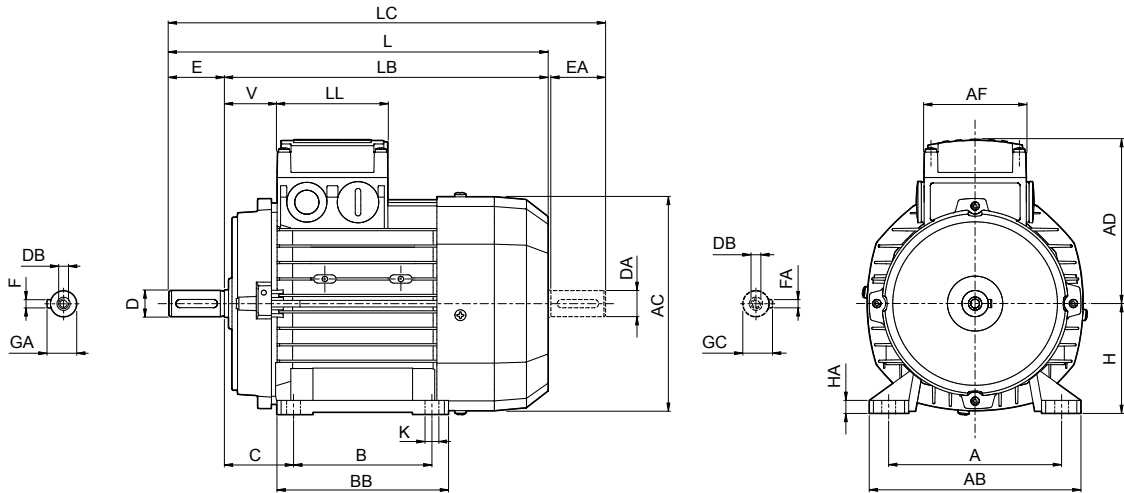


**BN-IE1**

	Shaft					Housing						Motor										
	D DA	E EA	DB	GA GC	F FA	B	A	HA	BB	AB	K	C	H	AC	L	LB	LC	AD	AF	LL	V	
<b>BN 63</b>	11	23	M4	12.5	4	80	100	8	96	120	7	40	63	121	207	184	232	95	74	80	30	
<b>BN 71</b>	14	30	M5	16	5	90	112	8	112	135		45	71	138	249	219	281	108				
<b>BN 80</b>	19	40	M6	21.5	6	100	125	8	124	153		50	80	156	273	233	315	119				38
<b>BN 90 S</b>	24	50	M8	27	8	140	8	155	174	192	10	56	90	176	326	276	378	133	98	98	44	
<b>BN 90 L</b>												125	63	100	195	366	306	429				142
<b>BN 100</b>	28	60	M10	31	8	140	190	10	175	224		70	112	219	385	325	448	157				52
<b>BN 112</b>											89	132	260	493	413	576	193	118	118	58		
<b>BN 132 S</b>	38	80	M12	41	10	216	12	218	254	254	12	89	132	260	493	413	576	193	118	118	58	
<b>BN 132 M</b>												178	89	132	260	493	413	576	193	118	118	58
<b>BN 160 M</b>	42	110	M16	45	12	210	254	25	264	319		14.5	108	160	310	596	486	680	245	187	187	51
<b>BN 160 L</b>	38 <sup>(1)</sup>					80 <sup>(1)</sup>					M12 <sup>(1)</sup>					41 <sup>(1)</sup>	10 <sup>(1)</sup>	254				
<b>BN 180 L</b>	48	110 <sup>(1)</sup>	M16	51.5	14	279	279	26	329	359	14					121	180	348				
<b>BN 200 L</b>	42 <sup>(1)</sup>					M20					59	16	305	318	355				398	18	133	200
	55		M16 <sup>(1)</sup>	45 <sup>(1)</sup>	12 <sup>(1)</sup>																	

NOTE: 1) These values refer to the rear shaft end.




# BN - IM B5

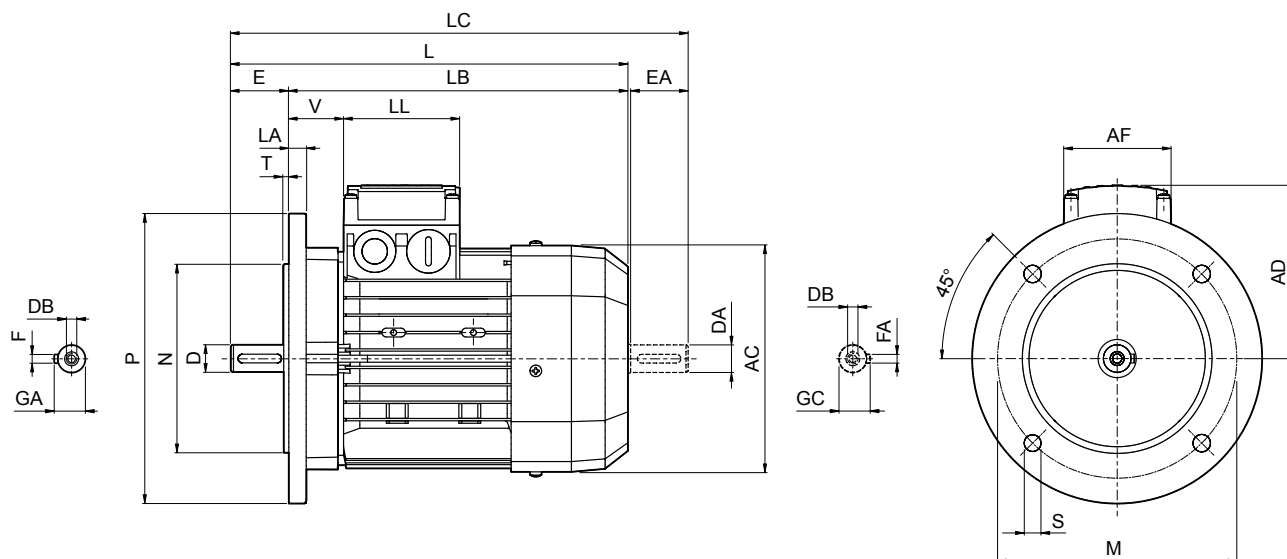


	Shaft					Flange					Motor								
	D DA	E EA	DB	GA GC	F FA	M	N	P	S	T	LA	AC	L	LB	LC	AD	AF	LL	V
<b>BN 56</b>	9	20	M3	10.2	3	100	80	120	7	3	8	110	185	165	207	91	74	80	34
<b>BN 63</b>	11	23	M4	12.5	4	115	95	140	9.5		10	121	207	184	232	95			26
<b>BN 71</b>	14	30	M5	16	5	130	110	160			10	138	249	219	281	108			37
<b>BN 80</b>	19	40	M6	21.5	6	165	130	200	11.5	3.5	11.5	156	274	234	315	119	98	98	38
<b>BN 90</b>	24	50	M8	27	8						176	326	276	378	133	44			
<b>BN 100</b>	28	60	M10	31	8	215	180	250	14	4	14	195	367	307	429	142	118	118	50
<b>BN 112</b>											15	219	385	325	448	157			52
<b>BN 132</b>											20	258	493	413	576	193			118
<b>BN 160 MR</b>	42 38 <sup>(1)</sup>	110 80 <sup>(1)</sup>	M16 M12 <sup>(1)</sup>	45 41 <sup>(1)</sup>	12 10 <sup>(1)</sup>	300	250	350	18.5	5	15	258	562	452	645	245	187	187	218
<b>BN 160 M</b>												310	596	486	680	51			
<b>BN 160 L</b>												310	640	530	724	51			
<b>BN 180 M</b>	48 38 <sup>(1)</sup>	110 110 <sup>(1)</sup>	M16 M16 <sup>(1)</sup>	51.5 41 <sup>(1)</sup>	14 10 <sup>(1)</sup>	350	300	400	18.5	5	18	348	708	598	823	261	187	187	52
<b>BN 180 L</b>	48 42 <sup>(1)</sup>			722	612							837	66						
<b>BN 200 L</b>	55 42 <sup>(1)</sup>			722	612							837	66						

**BN-IE1**

NOTE: 1) These values refer to the rear shaft end.




# BN - IM B14

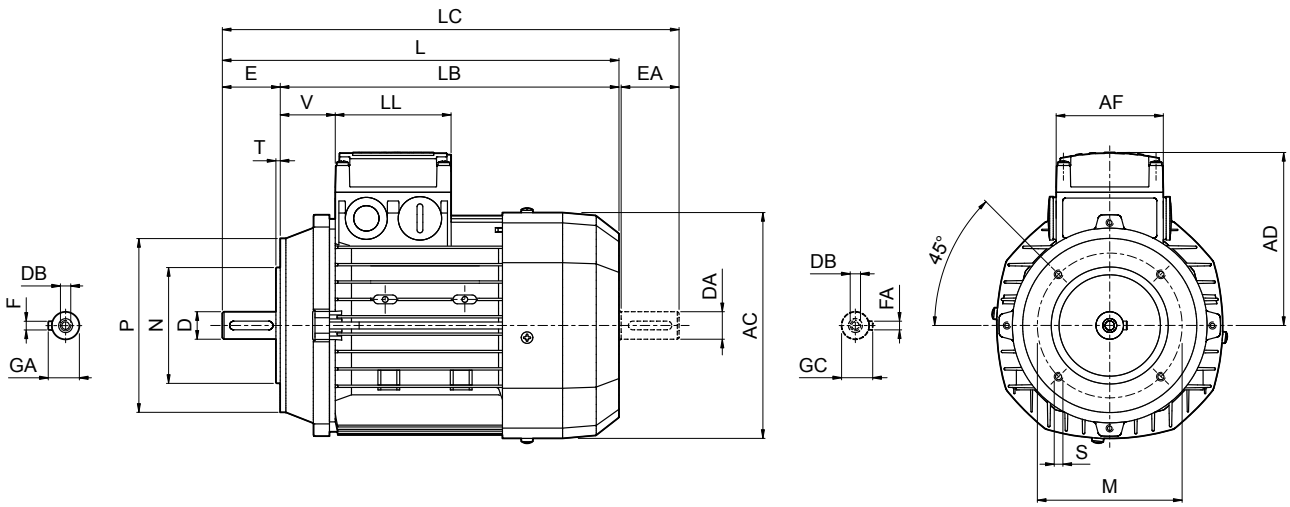


**BN-IE1**

	Shaft					Flange					Motor								
	D DA	E EA	DB	GA GC	F FA	M	N	P	S	T	AC	L	LB	LC	AD	AF	LL	V	
<b>BN 56</b>	9	20	M3	10.2	3	65	50	80	M5	2.5	110	185	165	207	91	74	80	34	
<b>BN 63</b>	11	23	M4	12.5	4	75	60	90			121	207	184	232	95			26	
<b>BN 71</b>	14	30	M5	16	5	85	70	105	M6		138	249	219	281	108			37	
<b>BN 80</b>	19	40	M6	21.5	6	100	80	120		3	156	274	234	315	119	38			
<b>BN 90</b>	24	50	M8	27	8	115	95	140	M8		3.5	176	326	276	378	133	98	98	44
<b>BN 100</b>	28	60	M10	31		130	110	160		195		367	307	429	142	50			
<b>BN 112</b>					219	385	325	448	157	52									
<b>BN 132</b>	38	80	M12	41	10	165	130	200	M10	4	258	493	413	576	193	118	118	58	



# BN - IM B3 - FD

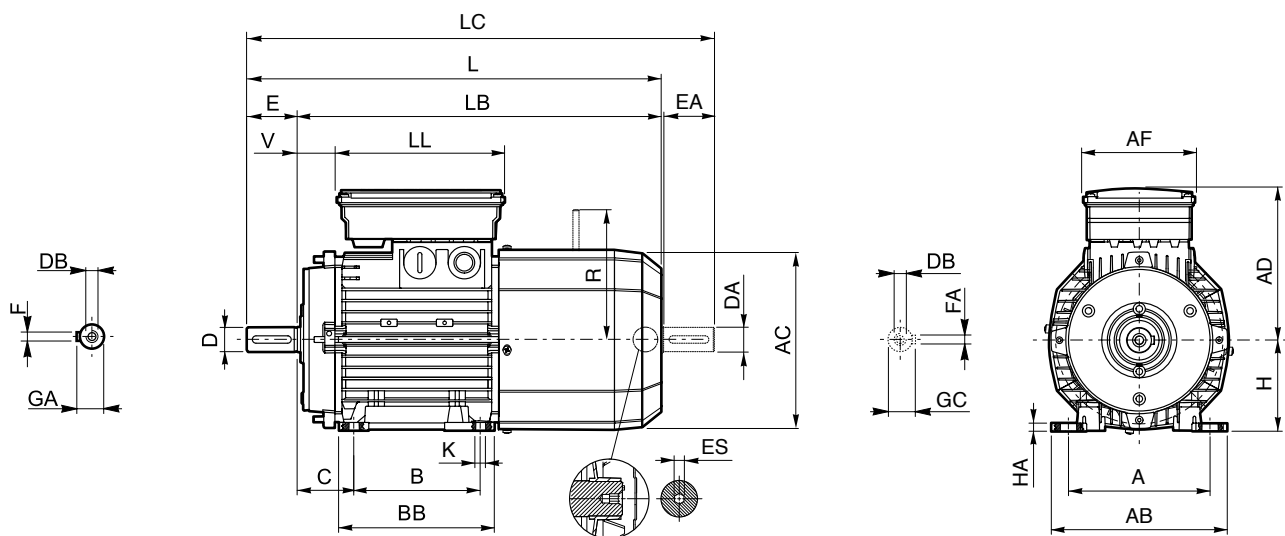


	Shaft					Housing						Motor											
	D DA	E EA	DB	GA GC	F FA	B	A	HA	BB	AB	K	C	H	AC	L	LB	LC	AD	AF	LL	V	R	S
<b>BN 63</b>	11	23	M4	12.5	4	80	100		96	120	7	40	63	121	272	249	297	122			14	96	
<b>BN 71</b>	14	30	M5	16	5	90	112		112	135		45	71	138	310	280	342	135	98	133	25	103	5
<b>BN 80</b>	19	40	M6	21.5	6		125	8	124	153		50	80	156	346	306	388	146			41		129
<b>BN 90 S</b>	24	50	M8	27	8	100			155	174	10	56	90	176	409	359	461	149			15		
<b>BN 90 L</b>						125																	
<b>BN 100</b>	28	60	M10	31	8		160		192			63	100	195	458	398	521	158			62		
<b>BN 112</b>						140	190	10	175		70	112	219	484	424	547	173						
<b>BN 132 S</b>	38	80	M12	41	10		216	12	218	254	12	89	132	260	603	523	686	210			204		
<b>BN 132 M</b>						178																	
<b>BN 160 M</b>	42	110	M16	45	12	210			264						736	626	820						
<b>BN 160 L</b>						254	25	304	319	14.5	108	160	310			780	670	864				245	
<b>BN 180 L</b>	48	110	M16	51.5	14	279	279		329	359	14	121	180		866	756	981		187	187			
<b>BN 200 L</b>						305	318	26	355	398	18	133	200	348		878	768	993				261	

NOTE:


1) These values refer to the rear shaft end.

2) For FD07 brake value R=226.

ES hexagon is not supplied with PS option.



# BN - IM B5 - FD

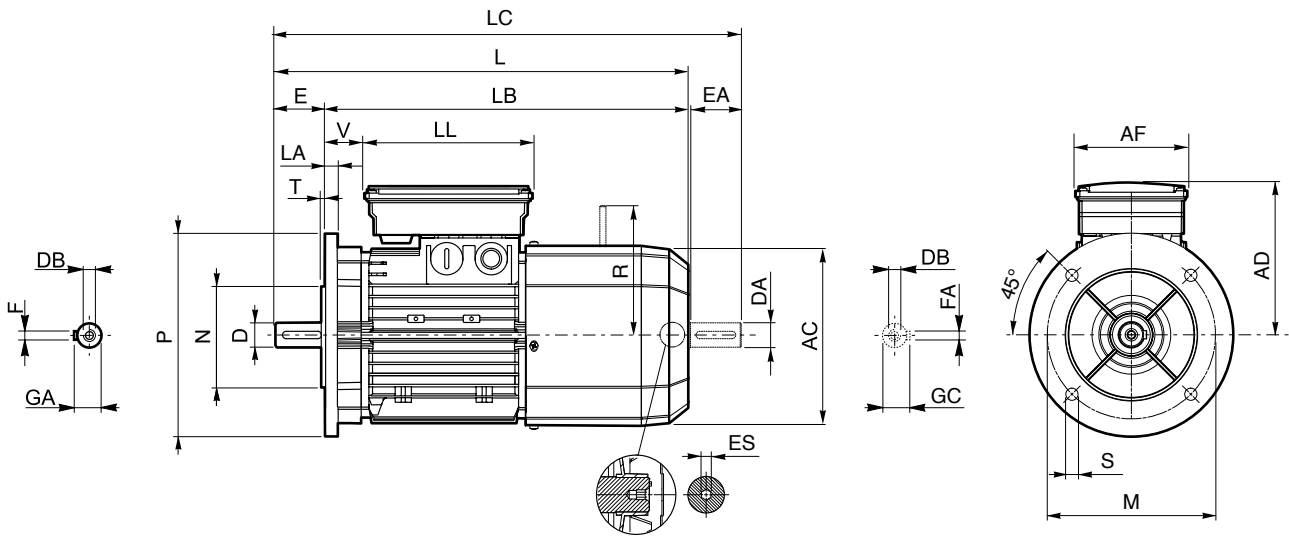


**BN-IE1**


	Shaft					Flange					Motor														
	D DA	E EA	DB	GA GC	F FA	M	N	P	S	T	LA	AC	L	LB	LC	AD	AF	LL	V	R	ES				
<b>BN 63</b>	11	23	M4	12.5	4	115	95	140	9.5	3	10	121	272	249	297	122	98	133	14	96	5				
<b>BN 71</b>	14	30	M5	16	5	130	110	160	9.5	3.5		138	310	280	342	135			25	103					
<b>BN 80</b>	19	40	M6	21.5	6	165	130	200	11.5			156	346	306	388	146			41	129					
<b>BN 90 S</b>	24	50	M8	27	8					215	180	250	14	4	176	409	359	461	149	110	165	39	160		
<b>BN 90 L</b>						146	62																		
<b>BN 100</b>	28	60	M10	31	10	265	230	300	14	4	14	195	458	398	521	158	140	188	46	204 <sup>(2)</sup>	6				
<b>BN 112</b>											15	219	484	424	547	173			62	199					
<b>BN 132</b>	38	80	M12	41	10	300	250	350	18.5	5	20	258	603	523	686	210	140	188	46	204 <sup>(2)</sup>					
<b>BN 160 MR</b>	42 38 <sup>(1)</sup>	110 80 <sup>(1)</sup>	M16 M12 <sup>(1)</sup>	45 41 <sup>(1)</sup>	12 10 <sup>(1)</sup>						310		250	350	18.5				5	15	310	736	626	820	245
<b>BN 160 M</b>												51				266									
<b>BN 160 L</b>	42 38 <sup>(1)</sup>	110 80 <sup>(1)</sup>	M16 M16 <sup>(1)</sup>	51.5 45 <sup>(1)</sup>	14 10 <sup>(1)</sup>	350	300	400	18.5	5	18	348	866	756	981	261	187	187	52	305					
<b>BN 180 M</b>	48 38 <sup>(1)</sup>	110 80 <sup>(1)</sup>	M16 M16 <sup>(1)</sup>	51.5 45 <sup>(1)</sup>	14 10 <sup>(1)</sup>								780	670	864				64						
<b>BN 180 L</b>	48 42 <sup>(1)</sup>	110 80 <sup>(1)</sup>	M16 M16 <sup>(1)</sup>	51.5 45 <sup>(1)</sup>	14 10 <sup>(1)</sup>	350	300	400	18.5	5	18	348	866	756	981	261	187	187	52	305					
<b>BN 200 L</b>	55 42 <sup>(1)</sup>	110 80 <sup>(1)</sup>	M20 M16 <sup>(1)</sup>	59 45 <sup>(1)</sup>	16 12 <sup>(1)</sup>								878	768	993				64						

NOTE:  
 1) These values refer to the rear shaft end.  
 2) For FD07 brake value R=226.

ES hexagon is not supplied with PS option.



# BN - IM B14 - FD

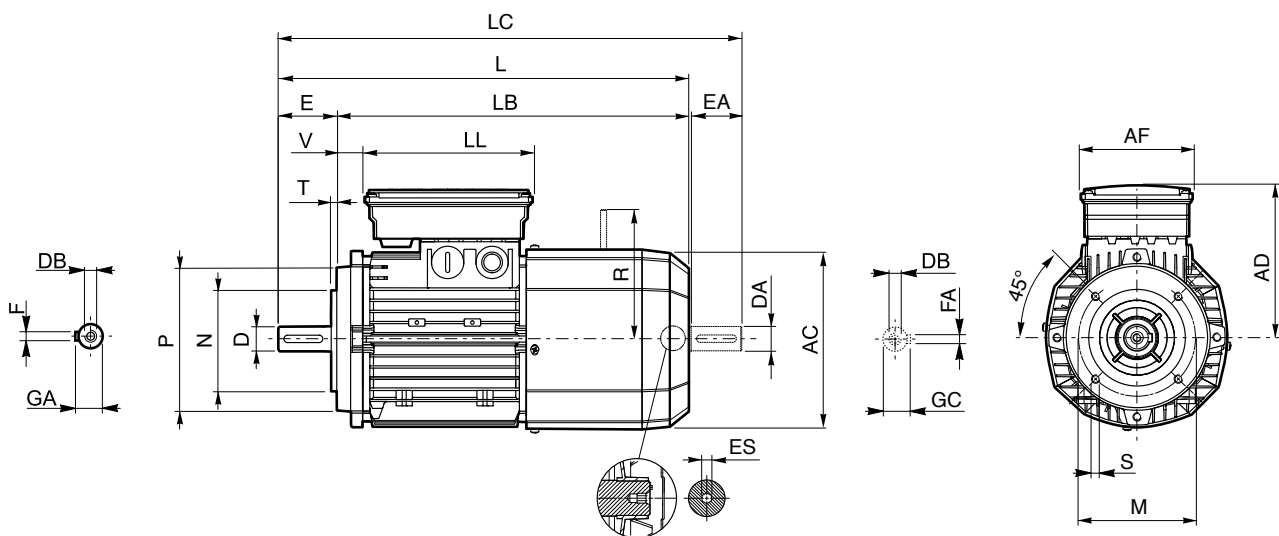


	Shaft					Flange					Motor									
	D DA	E EA	DB	GA GC	F FA	M	N	P	S	T	AC	L	LB	LC	AD	AF	LL	V	R	ES
<b>BN 63</b>	11	23	M4	12.5	4	75	60	90	M5	2.5	121	272	249	297	122	98	133	14	96	5
<b>BN 71</b>	14	30	M5	16	5	85	70	105	M6		138	310	280	342	135			25	103	
<b>BN 80</b>	19	40	M6	21.5	6	100	80	120			156	346	306	388	146			41	129	
<b>BN 90 S</b>	24	50	M8	27	8	115	95	140	M8	3	176	409	359	461	110	165	39	129	160	6
<b>BN 90 L</b>																				
<b>BN 100</b>	28	60	M10	31		130	110	160		3.5	195	458	398	521			158	73		
<b>BN 112</b>									219		484	424	547	173						
<b>BN 132</b>	38	80	M12	41	10	165	130	200	M10	4	258	603	523	686	210	140	188	46	204 <sup>(1)</sup>	


NOTE:

1) For FD07 brake value R=226.

ES hexagon is not supplied with PS option.




**M**

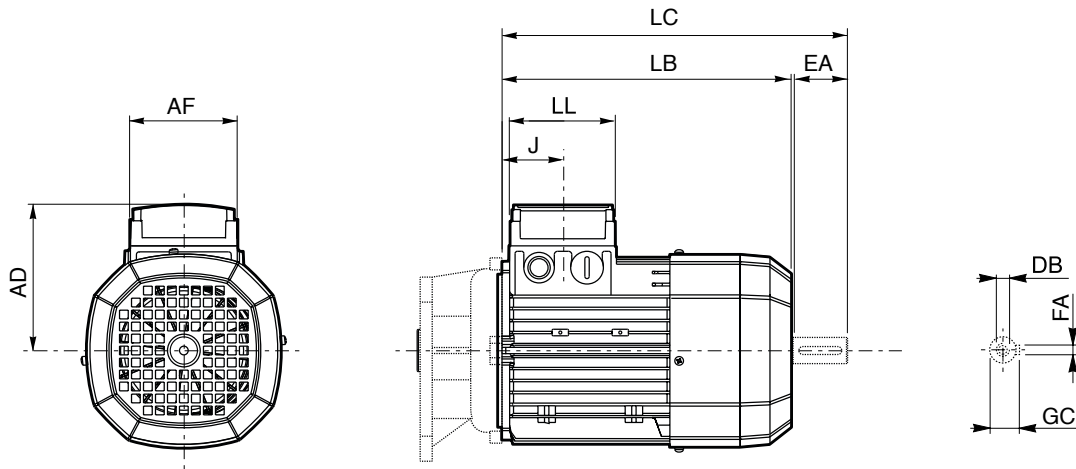


**M-IE1**

	Rear shaft end					Motor						
	DA	EA	DB	FA	GC	AC	LB	LC	AF	LL	J	AD
<b>M 0</b>	9	20	M3	3	10.2	110	133	155	74	80	42	91
<b>M 05</b>	11	23	M4	4	12.5	121	165	191			48	95
<b>M 1</b>	14	30	M5	5	16	138	187	219			45	108
<b>M 2 S</b>	19	40	M6	6	21.5	156	202	245			44	119
<b>M 3 S</b>	28	60	M10	8	31	195	230	293	98	98	53.5	142
<b>M 3 L</b>							262	325				
<b>M 4</b>	38	80	M12	10	41	258	361	444	118	118	64.5	193
<b>M 4 LC</b>							396	479				
<b>M 5 S</b>						310	418	502	187	187	77	245
<b>M 5 L</b>							462	546				



**M - FD**

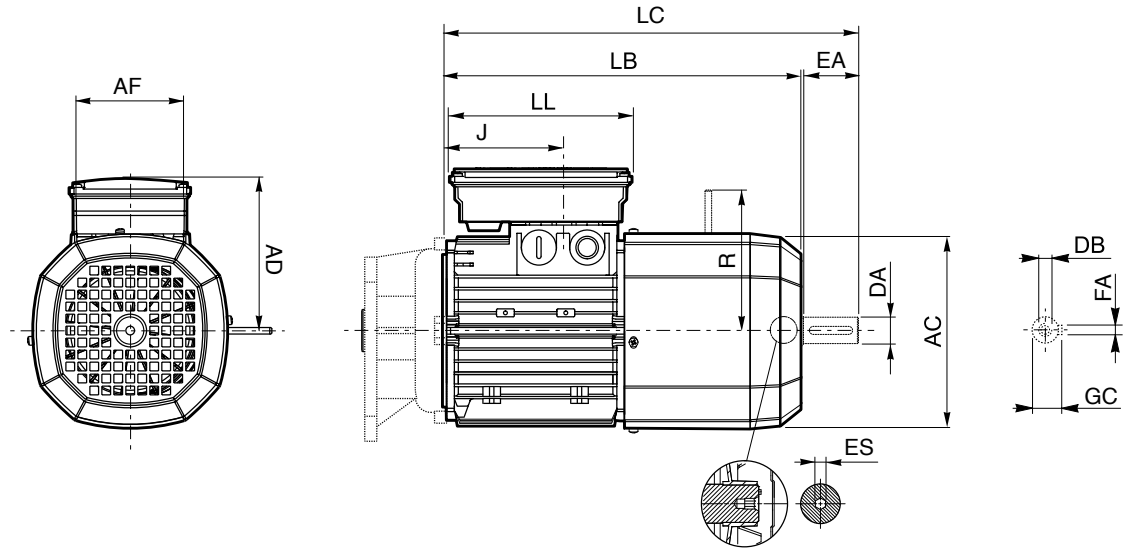

	Rear shaft end					Motor								
	DA	EA	DB	FA	GC	AC	LB	LC	AF	LL	J	AD	R	ES
<b>M 05</b>	11	23	M4	4	12.5	121	231	256	98	133	48	122	96	5
<b>M 1</b>	14	30	M5	5	16	138	248	280			73	135	103	
<b>M 2 S</b>	19	40	M6	6	21.5	156	272	314			88	146	129	
<b>M 3 S</b>	28	60	M10	8	31	195	326	389	110	165	124.5	158	160	6
<b>M 3 L</b>							353	416						
<b>M 4</b>	38	80	M12	10	41	258	470	553	140	188	185.5	210	204 (1)	
<b>M 4 LC</b>							495	578			64.5		226	
<b>M 5 S</b>						310	558	642	187	187	77	245	266	
<b>M 5 L</b>							602	686						


**M-IE1**

NOTE:  
1) For FD07 brake value R=226.

ES hexagon is not supplied with PS option.



## INDEX OF REVISIONS

BR_CAT_BNEXY_STD_ENG_R07_0	
	Description
	<p>Minor modification on servoventilation variant section</p> <p>Added availability of BY electric motors</p> <p>Minor corrections on dimensions and rating charts</p> <p>Elimination of FA brakes due to phase out</p> <p>Updated motor normative section</p>

2026.06.24

This publication supersedes and replaces any previous edition and revision. We reserve the right to implement modifications without notice. This catalogue cannot be reproduced, even partially, without prior consent.

# Bonfiglioli global locations

## AUSTRALIA

### Bonfiglioli Transmission (Aust.) Pty Ltd

Plumpton NSW



## BRAZIL

### Bonfiglioli Redutores do Brasil Ltda

São Bernardo do Campo - São Paulo



## CHINA

### Bonfiglioli Drives (Shanghai) Co. Ltd.

Shanghai



### Selcom Electronics (Shanghai) Co., Ltd

Shanghai



Shanghai



## FRANCE

### Bonfiglioli Transmission S.A.S.

Marly la Ville



## GERMANY

### Bonfiglioli Deutschland GmbH

Neuss



### Bonfiglioli Deutschland GmbH

Krefeld



### O&K Antriebstechnik GmbH

Hattingen



## INDIA

### Bonfiglioli Transmission Ltd.

Mobility & Wind Industries

Thirumudivakkam

Kancheepuram - Tamil Nadu



Industry & Automation Solutions

Mannur Village, Sriperumbudur Taluk

Kancheepuram - Tamil Nadu



Industry & Automation Solutions

Pune - Maharashtra



## ITALY

### Bonfiglioli Riduttori S.p.A.

Industry & Automation Solutions

Calderara di Reno (BO)



Industry & Automation Solutions

Carpiano



Mobility & Wind Industries

Forli



Industry & Automation Solutions

Rovereto



### Selcom Group S.p.A.

Castel Maggiore (BO)



Castel Maggiore (BO)



Cadriano (BO)



## NEW ZEALAND

### Bonfiglioli Transmission (Aust.) Pty Ltd

Auckland - Ellerslie



## SINGAPORE

### Bonfiglioli South East Asia Pte Ltd

Singapore



## SLOVAKIA

### Bonfiglioli Slovakia s.r.o.

Považská Bystrica



## SOUTH AFRICA

### Bonfiglioli South Africa Pty Ltd.

Johannesburg



## SPAIN

### Tecnotrans Bonfiglioli S.A

Castellbisbal - Barcelona



## TURKEY

### Bonfiglioli Türkiye Jsc

Çiğli - Izmir



## UNITED KINGDOM

### Bonfiglioli UK Ltd.

Warrington - Cheshire

Tel. +44 1925 852667



## USA

### Bonfiglioli USA Inc.

Hebron - Kentucky



## VIETNAM

### Bonfiglioli Vietnam Co. Ltd.

Ben Cat city, Binh Duong province





We have a relentless commitment to excellence, innovation & sustainability. Our team creates, distributes and services world-class power transmission & drive solutions to keep the world in motion.

#### HEADQUARTERS

##### **Bonfiglioli S.p.A.**

Via Cav. Clementino Bonfiglioli, 1  
40012 Calderara di Reno - Bologna (Italy)  
Tel. +39 051 6473111

